

## VARDAFLEX Asymmetrisch

Der **VARDAFLEX** LED-Strip ist nur für die Installation in trockenen Innenräumen geeignet.



### Stromschlaggefahr!

Beauftragen Sie mit der Installation eine Elektrofachkraft. Für Leuchten, die nicht gemäß den europäischen Sicherheitsrichtlinien installiert wurden, entfällt jeder Haftungsanspruch.



### Achtung!

**VARDAFLEX** LED-Strip nur an geeignetes Netzgerät (24 V DC) anschließen.  
Nur komplett abgerollt betreiben.  
**VARDAFLEX** LED-Strips in Parallelschaltung verbinden.

### LIEFERUMFANG:

1 x 5 Meter **VARDAFLEX** LED-Strip  
5 x Einspeisungsverbinder  
1 x Direktverbinder

### TECHNISCHE DATEN:

Spannungsversorgung	24 V Netzgerät mit konstanter Ausgangsspannung
Leistung	96 W
Stromstärke	4,0 A
Ausstrahlwinkel	120°
Anzahl LED	1200
Länge	Maximal 5 Meter pro Anschluss
Abmessungen	5000 x 10 x 2,5 mm
Biegedurchmesser	40 mm



CE-konform mit den zutreffenden europäischen Richtlinien



Schutzklasse 3 - Schutzkleinspannung



Sehr hell - Profil notwendig  
**VARDAFLEX** LED-Strip nicht ohne weiteren Kühlkörper sowie ausreichende Belüftung betreiben



Nur für den Innenbereich geeignet

### MONTAGE:



### Stromschlaggefahr!

Vor der Installation Spannung abschalten. Sicherstellen, dass die Spannung nicht versehentlich wieder eingeschaltet werden kann.



### Achtung!

Bei stromführenden Oberflächen Isolierschicht zwischen **VARDAFLEX** LED-Strip und Oberfläche anbringen. Oberflächen müssen eben, staub- und fettfrei sowie trocken sein.

1. Oberfläche vorbereiten.
2. **VARDAFLEX** LED-Strip, falls erforderlich, kürzen (Bild 1).
3. Schutzfolie abziehen und **VARDAFLEX** LED-Strip mit leichtem Druck anpressen, dabei nicht direkt auf die elektronischen Bauteile drücken.
4. **VARDAFLEX** LED-Strip an Spannungsversorgung anschließen.

### LED-PLATINE KÜRZEN:



### Stromschlaggefahr!

Vor dem Kürzen immer spannungsfrei schalten.  
**VARDAFLEX** LED-Strip kann jeweils nach **zwölf LEDs (50 mm)** getrennt werden (Bild 1).



**VARDAFLEX** LED-Strip an der markierten Stelle trennen.  
Bei eng bestückten LED-Strips wird ein Mikroseitenschneider oder optional ein Cutter benötigt!



### Achtung!

Bei Lötverbindungen beachten: Löttemperatur 260° C und Löttdauer maximal 10 Sekunden.



### ENTSORGUNG:

Entsorgen Sie elektrische und elektronische Geräte umweltgerecht. Nähere Informationen erhalten Sie bei Ihrer zuständigen Behörde.

## VARDAFLEX Asymmetrisch

The VARDAFLEX LED strip is only suitable for installation in dry indoor rooms.



### Risk of electric shock!

Be sure to have a professional electrician complete installation. There is no warranty coverage for any lights installed without observing european safety directives.



### Caution!

Only connect the VARDAFLEX LED strip to a suitable power supply (24 V DC).  
Only operate when completely unrolled.  
Connect VARDAFLEX LED strips in parallel.

### DELIVERY INCLUDES:

1 x 5 metre VARDAFLEX LED strip  
5 x in-feed connectors  
1 x direct connector

### TECHNICAL DATA:

Power supply	24 V power supply with constant output voltage
Power	96 W
Current strength	4.0 A
Radiation angle	120°
Quantity LED	1200
Length	maximum 5 metres per connection
Dimensions	5000 x 10 x 2.5 mm
Bending diameter	40 mm



Compliant with the applicable european CE directives



Safety class 3 - low voltage protection



Very light - profile necessary  
The VARDAFLEX LED strip needs an additional cooling element and sufficing air ventilation.



Suitable for indoor use only

### INSTALLATION:



### Risk of electric shock!

Switch off voltage prior to installation. Ensure that voltage cannot be accidentally switched on again.



### Caution!

On conducting surfaces, place an insulation layer between the VARDAFLEX LED strip and surface. Surfaces must be flat, free of dust, grease and dry.

1. Prepare surface.
2. Shorten VARDAFLEX LED strip if necessary (Fig. 1).
3. Peel off adhesive film and gently press on VARDAFLEX LED strip, do not press directly on the LEDs.
4. Connect VARDAFLEX LED strip to power supply.


### SHORTENING THE LED STRIP:



### Risk of electric shock!

Always disconnect the mains plug before shortening.

VARDAFLEX LED strip can be separated in each case after **twelve LEDs (50 mm)** (Fig. 1).

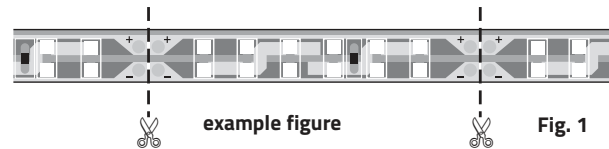

Separate the VARDAFLEX LED strip at the marked position. For a tightly assembled LED strip is a micro side cutter or an optional cutter required.



### Caution!

With soldered connections note that the soldering temperature is 260° C and the soldering duration a maximum of 10 seconds per soldering point.



### DISPOSAL:

Dispose of electrical and electronic equipment in an environmentally friendly manner. Please contact your local council for further information.

rutec  
Projekt

Carl-Zeiss-Str. 15  
28857 Syke