


NAUTILUS SP, QR-C51



12 V 50/60 Hz
Material: Edelstahl 304/Glas

- offenes Kabelend

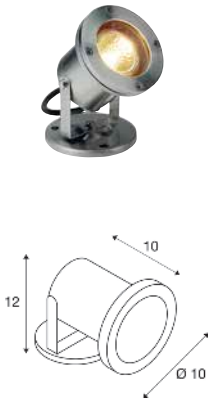


Socket: 1xGX5.3

Variante	Art.Nr.	EUR
● edelstahl	229090	90,90

GU5.3 | 6 W | 36°
450 lm | 2700 K | EEK = G

Art.Nr.: 1001574 35,00 EUR

NAUTILUS 10 SPOT SP, QPAR51

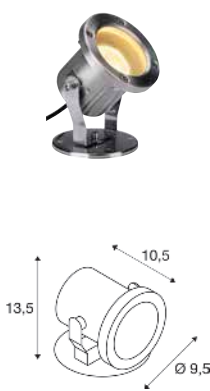

220-240 V ~50/60 Hz
Material: Edelstahl 316

- offenes Kabelend



Socket: 1xGU10 max. Ø: 5,1 cm | L: 6 cm

Variante	Art.Nr.	EUR
● edelstahl	229741	104,00

GU10 | 6 W | 38°
450 lm | 2700 K | EEK = F

Art.Nr.: 1005077 7,50 EUR


GU10 | 5 W | 100°
300 lm | 2000 K-6500 K | EEK = G

Art.Nr.: 1012470 34,50 EUR

⊕

Artikel	Art.Nr.	EUR
Verbindungsbox IP68, 3-polig		
● schwarz	228730	18,90

NAUTILUS 10 SPOT SP, LED

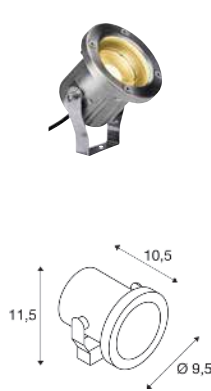

220-240 V ~50/60 Hz
Systemleistung: 9 W
Material: Edelstahl 316

- IP44-Sicherheitsstecker



3000 K
690 lm

Variante	Art.Nr.	EUR
● edelstahl	1001962	119,00

⊕

Artikel	Art.Nr.	EUR
Erdspeiß Kunststoff		
● schwarz	900011	4,09
Montage Platte		
● edelstahl	1001963	9,29