BIG WHITE®
2027

SLV LIGHTING CATALOGUE



1-PHASE SYSTEMS

INDOOR | 1-PHASE SYSTEMS



SOCKET

HAVEN 25 | 487



LED

QUIMERA | 489



SOCKET

FORCHINI M 40 TRACK | 489



LED

LALU® SET | 491–493



SOCKET

PURI 2.0 TUBE | 495–497



SOCKET

PURI 2.0 CONE | 495–497



SOCKET

PURI 2.0 DOME | 495–459



SOCKET

PURI 2.0 | 498



SOCKET

ENOLA® 2.0 | 500–501



SOCKET

BIMA 2.0 | 503



LED
SOCKET

GRIP! | 505–509



LED

GRIP! FLAT | 511



LED

DYSKO | 513



LED
SOCKET

LIGHT EYE® | 514–517



LED

KALU 2.0 | 519



SOCKET

KALU TRACK | 519



LED

NOBLO® SPOT | 521



SOCKET

ASTO TUBE | 523



SOCKET

PARA CONE GL | 525



SOCKET

PARA CONE 14 | 525



LED

HELIA 50 TRACK | 527



LED

PANEL TRACK | 527



LED

PANEL TRACK | 527



SOCKET

EURO SPOT TRACK | 529





SOCKET

ALTRA DICE TRACK | 529


1009131 511
WACHTEL

1~ SYSTEM MOUNTING TRACK
1-PHASE

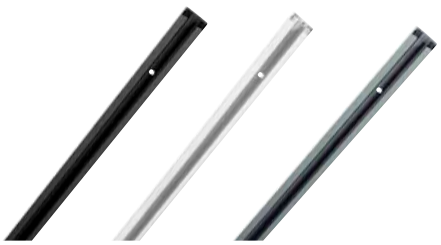

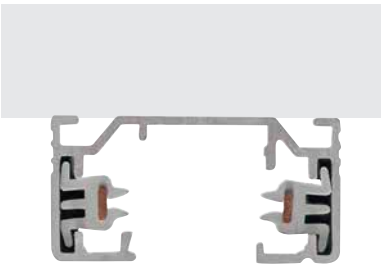

	100 cm	100 cm	100 cm
Nominal voltage (V)	220-240 V ~50/60 Hz	220-240 V ~50/60 Hz	220-240 V ~50/60 Hz
Max. current (A)	16 A max.	16 A max.	16 A max.
Colour	● black	○ white	● grey
Material	Aluminium	Aluminium	Aluminium
L x W x H (cm)	100 cm x 3.5 cm x 1.8 cm	100 cm x 3.5 cm x 1.8 cm	100 cm x 3.5 cm x 1.8 cm
Prod. no.	**143010**	**143011**	**143012**
GBP	**31.00**	**31.00**	**31.00**


	200 cm	200 cm	200 cm
Nominal voltage (V)	220-240 V ~50/60 Hz	220-240 V ~50/60 Hz	220-240 V ~50/60 Hz
Max. current (A)	16 A max.	16 A max.	16 A max.
Colour	● black	○ white	● grey
Material	Aluminium	Aluminium	Aluminium
L x W x H (cm)	200 cm x 3.5 cm x 1.8 cm	200 cm x 3.5 cm x 1.8 cm	200 cm x 3.5 cm x 1.8 cm
Prod. no.	**143020**	**143021**	**143022**
GBP	**59.00**	**59.00**	**59.00**


	300 cm	300 cm	300 cm
Nominal voltage (V)	220-240 V ~50/60 Hz	220-240 V ~50/60 Hz	220-240 V ~50/60 Hz
Max. current (A)	16 A max.	16 A max.	16 A max.
Colour	● black	○ white	● grey
Material	Aluminium	Aluminium	Aluminium
L x W x H (cm)	300 cm x 3.5 cm x 1.8 cm	300 cm x 3.5 cm x 1.8 cm	300 cm x 3.5 cm x 1.8 cm
Prod. no.	**1002151**	**1002152**	**1002153**
GBP	**88.00**	**88.00**	**88.00**


1~ SYSTEM MOUNTING TRACK
1-PHASE


Planning assistance and accessories at a glance

View of components from above
on the installation side

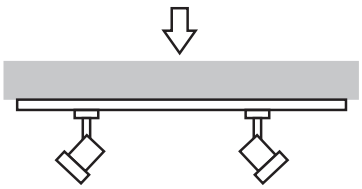

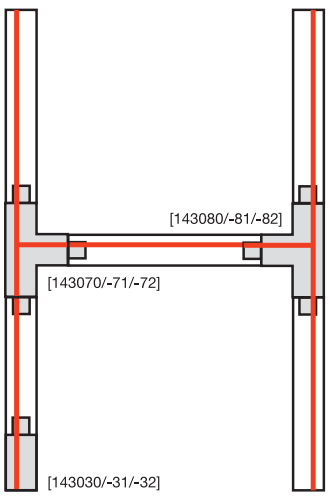

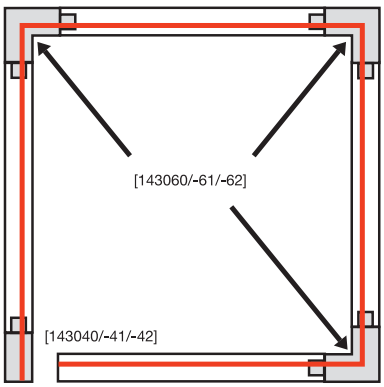

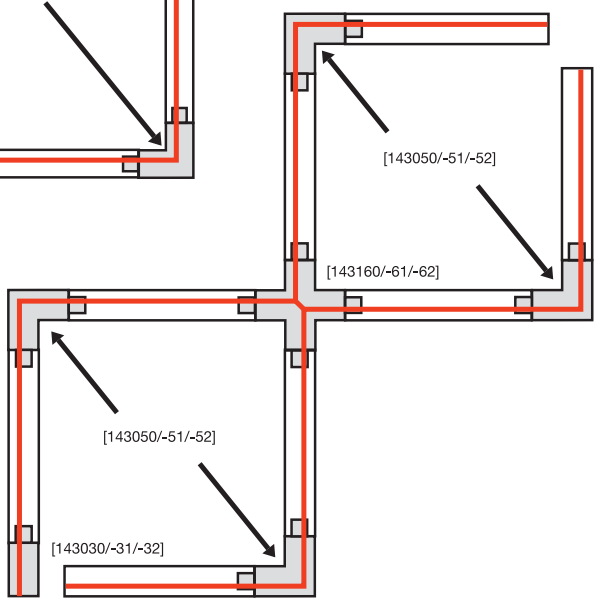



1-PHASE ADAPTOR

6 A max. | 8.5 cm | Polycarbonate (PC)
L: 8.5 cm | W: 3.5 cm | H: 3.2 cm

● black	Prod. no.	**143120**	**14.00 GBP**
○ white	Prod. no.	**143121**	**14.00 GBP**
● grey	Prod. no.	**143124**	**14.00 GBP**



1-PHASE ADAPTOR WITH HOOK

6 A max. | 8.5 cm | Polycarbonate (PC)
L: 8.5 cm W: 3.5 cm H: 7.4 cm

For pendant lights that feature additional mechanical suspension.

● black	Prod. no.	**143170**	**14.00 GBP**
○ white	Prod. no.	**143171**	**14.00 GBP**
● grey	Prod. no.	**143172**	**14.00 GBP**



1-PHASE, FEED-IN, EARTH LEFT

16 A max. | 6.5 cm | Polycarbonate (PC)
L: 6.5 cm | W: 3.5 cm | H: 1.8 cm

● black	Prod. no.	**143030**	**9.00 GBP**
○ white	Prod. no.	**143031**	**9.00 GBP**
● grey	Prod. no.	**143032**	**9.00 GBP**



1-PHASE, FEED-IN, EARTH RIGHT

16 A max. | 6.5 cm | Polycarbonate (PC)
L: 6.5 cm | W: 3.5 cm | H: 1.8 cm

● black	Prod. no.	**143040**	**9.00 GBP**
○ white	Prod. no.	**143041**	**9.00 GBP**
● grey	Prod. no.	**143042**	**9.00 GBP**



1-PHASE, LONGITUDINAL CONNECTOR WITH FEED CAPACITY

16 A max. | 17.2 cm | Polycarbonate (PC)
L: 17.2 cm | W: 3.5 cm | H: 1.8 cm

● black	Prod. no.	**143100**	**16.00 GBP**
○ white	Prod. no.	**143101**	**16.00 GBP**
● grey	Prod. no.	**143102**	**16.00 GBP**



1-PHASE, LONGITUDINAL CONNECTOR, ELECTRICAL

16 A max. | 6.4 cm | Polycarbonate (PC)
L: 6.4 cm | W: 3.5 cm | H: 1.8 cm

● black	Prod. no.	**143090**	**7.00 GBP**
○ white	Prod. no.	**143091**	**7.00 GBP**
● grey	Prod. no.	**143092**	**7.00 GBP**



1-PHASE, CORNER CONNECTOR, INTERNAL EARTH

16 A max. | 10.4 cm | Polycarbonate (PC)
L: 10.4 cm | W: 10.4 cm | H: 1.8 cm

● black	Prod. no.	**143060**	**15.00 GBP**
○ white	Prod. no.	**143061**	**15.00 GBP**
● grey	Prod. no.	**143062**	**15.00 GBP**



1-PHASE, CORNER CONNECTOR, EXTERNAL EARTH

16 A max. | 10.4 cm | Polycarbonate (PC)
L: 10.4 cm | W: 10.4 cm | H: 1.8 cm

● black	Prod. no.	**143050**	**15.00 GBP**
○ white	Prod. no.	**143051**	**15.00 GBP**
● grey	Prod. no.	**143052**	**15.00 GBP**



1-PHASE, T-CONNECTOR, EXTERNAL EARTH, LEFT

16 A max. | 17.2 cm | Polycarbonate (PC)
L: 17.2 cm | W: 10.4 cm | H: 1.8 cm

● black	Prod. no.	**143070**	**19.00 GBP**
○ white	Prod. no.	**143071**	**19.00 GBP**
● grey	Prod. no.	**143072**	**19.00 GBP**



1-PHASE, T-CONNECTOR, EXTERNAL EARTH, RIGHT

16 A max. | 17.2 cm | Polycarbonate (PC)
L: 17.2 cm | W: 10.4 cm | H: 1.8 cm

● black	Prod. no.	**143080**	**19.00 GBP**
○ white	Prod. no.	**143081**	**19.00 GBP**
● grey	Prod. no.	**143082**	**19.00 GBP**



1-PHASE, X-CONNECTOR

16 A max. | 9.5 cm | Polycarbonate (PC)
L: 9.5 cm | W: 17.2 cm | H: 1.8 cm

● black	Prod. no.	**143160**	**28.00 GBP**
○ white	Prod. no.	**143161**	**28.00 GBP**
● grey	Prod. no.	**143162**	**28.00 GBP**



1-PHASE, FLEX CONNECTOR

16 A max. | 16.4 cm | Polycarbonate (PC)
L: 16.4 cm | W: 3.5 cm | H: 1.8 cm

● black	Prod. no.	**143110**	**16.00 GBP**
○ white	Prod. no.	**143111**	**16.00 GBP**
● grey	Prod. no.	**143112**	**16.00 GBP**



1-PHASE, STABILISER, LONGITUDINAL CONNECTOR

19.7 cm | Steel
L: 19.7 cm | W: 3.2 cm | H: 1.3 cm
For reinforcement when mounting several tracks with ceiling suspension (1002845)

● nickel	Prod. no.	**143151**	**7.00 GBP**



1-PHASE, STABILISER, CORNER CONNECTOR LONG

11.5 cm | Steel
L: 11.,5 cm | W: 11.5 cm | H: 0.5 cm
For reinforcement when mounting several tracks with ceiling suspension (1002845)

● nickel	Prod. no.	**143152**	**8.00 GBP**



1-PHASE, STABILISING X-CONNECTOR

19.7 cm | Steel
L: 19.7 cm | B: 19.7 cm | H: 0.5 cm
For reinforcement when mounting several tracks with ceiling suspension (1002845)

● nickel	Prod. no.	**143169**	**11.00 GBP**



2M COVER FOR 1-PHASE TRACK

200 cm | Polycarbonate (PC)
L: 200 cm | B: 1.8 cm | H: 0.8 cm

● black	Prod. no.	**1004783**	**19.00 GBP**
○ white	Prod. no.	**1004785**	**19.00 GBP**
● grey	Prod. no.	**1004784**	**19.00 GBP**



1-PHASE, END CAPS (2 PIECES)

0.4 cm | Polycarbonate (PC)
L: 0.4 cm | W: 3.5 cm | H: 1.8 cm

● black	Prod. no.	**143130**	**4.00 GBP**
○ white	Prod. no.	**143131**	**4.00 GBP**
● grey	Prod. no.	**143132**	**4.00 GBP**



1-PHASE, CEILING ROSETTE 2.0

6 A max. | Polycarbonate (PC)
H: 2.5 cm

● black	Prod. no.	**1007926**	**19.00 GBP**
○ white	Prod. no.	**1007927**	**19.00 GBP**
● grey	Prod. no.	**1007928**	**19.00 GBP**



EUTRACK®, S-TRACK AND 1-PHASE TRACKS, 5 M, SET OF TWO

500 cm | Stainless steel/Brass
L: 500 cm

● nickel	Prod. no.	**1002845**	**37.00 GBP**



COVER PLATE, 1-PHASE


10 cm | Steel
L: 10 cm | W: 10 cm | H: 0 cm

● black	Prod. no.	**1008149**	**14.00 GBP**
○ white	Prod. no.	**1008148**	**14.00 GBP**
● grey	Prod. no.	**1008150**	**14.00 GBP**


143580 527

1~ SYSTEM RECESSED TRACK
1-PHASE, 2 M



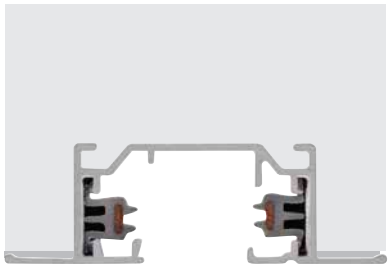

	200 cm
Nominal voltage (V)	220-240 V ~50/60 Hz
Max. current (A)	16 A max.
Colour	○ white
Material	Aluminium
L x W x H (cm)	200 cm x 5.5 cm x 1.8 cm
Prod. no.	**143221**
GBP	**65.00**



1-PHASE, FEED-IN, EARTH LEFT

16 A max. | 10.8 cm | Plastic
L: 10.8 cm | W: 5.5 cm | H: 2 cm

○ white Prod. no. **143231** **13.00 GBP**



1-PHASE, FEED-IN, EARTH RIGHT

16 A max. | 10.8 cm | Plastic
L: 10.8 cm | W: 5.5 cm | H: 2 cm

○ white Prod. no. **143241** **13.00 GBP**



1-PHASE, LONGITUDINAL CONNECTOR INCLUDING LONGITUDINAL BRACE

6.5 cm | Plastic/Steel
L: 6.5 cm | W: 1.8 cm | H: 1.7 cm
Longitudinal connector including longitudinal brace

○ white Prod. no. **143271** **13.00 GBP**



1-PHASE, CORNER CONNECTOR, INTERNAL EARTH

16 A max. | 11.2 cm | Plastic
L: 11.2 cm | W: 11.2 cm | H: 2 cm

○ white Prod. no. **143261** **19.00 GBP**



1-PHASE, CORNER CONNECTOR, EXTERNAL EARTH

16 A max. | 11.2 cm | Plastic
L: 11.2 cm | W: 11.2 cm | H: 2 cm

○ white Prod. no. **143251** **19.00 GBP**



1-PHASE, END CAP

2.7 cm | Plastic
L: 2.7 cm | W: 5.5 cm | H: 1.8 cm

○ white Prod. no. **143281** **7.00 GBP**



1-PHASE, RETAINER

7.5 cm | Steel
L: 7.5 cm | W: 1.5 cm | H: 4 cm

● nickel Prod. no. **143230** **4.00 GBP**



1-PHASE ADAPTOR WITH HOOK

6 A max. | 8.5 cm | Polycarbonate (PC)
L: 8.5 cm W: 3.5 cm H: 7.4 cm
For pendant lights that feature additional mechanical suspension.

● black Prod. no. **143170** **14.00 GBP**
○ white Prod. no. **143171** **14.00 GBP**
● grey Prod. no. **143172** **14.00 GBP**



1-PHASE ADAPTOR

6 A max. | 8.5 cm | Polycarbonate (PC)
L: 8.5 cm | W: 3.5 cm | H: 3.2 cm


● black Prod. no. **143120** **14.00 GBP**
○ white Prod. no. **143121** **14.00 GBP**
● grey Prod. no. **143124** **14.00 GBP**


1011692 487

HAVEN 25
1-PHASE, E27

NEW





IP20 IK02 200 cm

220-240 V ~50/60 Hz
Material: Steel

SOCKET INSIDE 40 W

Base: 1xE27

Variant	Prod. no.	GBP
● black	1011690	222.00
○ white	1011691	222.00
● gold	1011692	231.00

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F

C


Prod. no.: **1005303** **9.00 GBP**


1008042 489

QUIMERA
1-PHASE, PD

GERMAN DESIGN AWARD WINNER 2025





IP20 | IK03 | 360° | 50000h L80B50 | 150 cm

220-240 V ~50/60 Hz | 350 mA
Total wattage: 7.6 W
Material: Aluminium

- Narrow lines on the glass create fascinating light reflections
- Black track adapter


LED INSIDE | CRI 90

Indirect	2700 K
	365 lm

Variant	Prod. no.	GBP
black	**1008041**	**323.00**
brass	**1008042**	**323.00**
copper	**1008043**	**323.00**

FORCHINI M 40 TRACK
1-PHASE, E27





IP20 | 150 cm

220-240 V ~50/60 Hz
Material: Steel/Aluminium

- 1008540 with black 1-phase track adapter

SOCKET INSIDE | 40 W

Base: 1xE27	max. Ø: 6.8 cm	L: 15.2 cm

Variant	Prod. no.	GBP
black/gold	**1008539**	**201.00**
black/gold	**1008540**	**201.00**

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F

Prod. no.: **1005303** **9.00 GBP**


1010798 491

LALU® SET
1-PHASE, PD, LED BASE, PHASE





IP20 IK03 40° 50000 h L80B20 200 cm

220-240 V ~50/60 Hz | 500 mA
Total wattage: 9.5 W
Material: Aluminium/Steel

- Including colour temperature switch 2700K/3000K
- With black adapter

LED INSIDE CCT CRI 90

	2700 K	3000 K
Down	700 lm	750 lm

Variant	Prod. no.	GBP
● black	**1010798**	**222.00**

LALU® SET
1-PHASE, PD, LED BASE, PHASE





IP20 IK03 40° 50000 h L80B20 200 cm

220-240 V ~50/60 Hz | 500 mA
Total wattage: 9.5 W
Material: Aluminium/Steel

- Including colour temperature switch 2700K/3000K
- With black adapter

LED INSIDE CCT CRI 90

	2700 K	3000 K
Down	700 lm	800 lm


Variant	Prod. no.	GBP
● black	**1010799**	**235.00**

Discover more LALU® colours and shapes at ks-light.co.uk


1010797 493

LALU® SET
1-PHASE, PD, LED BASE, PHASE





IP20 IK03 40° 50000h L80B20 200 cm

220-240 V ~50/60 Hz | 500 mA
Total wattage: 9.5 W
Material: Aluminium/Steel

- Including colour temperature switch 2700K/3000K
- With black adapter


LED INSIDE CCT CRI 90

	2700 K	3000 K
Down	550 lm	600 lm

Variant	Prod. no.	GBP
● black	**1010797**	**222.00**

LALU® SET
1-PHASE, PD, LED BASE, PHASE





IP20 IK03 40° 50000h L80B20 200 cm

220-240 V ~50/60 Hz | 500 mA
Total wattage: 9.5 W
Material: Aluminium/Steel

- Including colour temperature switch 2700K/3000K
- With black adapter

LED INSIDE CCT CRI 90

	2700 K	3000 K
Down	700 lm	700 lm


Variant	Prod. no.	GBP
● black	**1010800**	**218.00**

Discover more LALU® colours and shapes at ks-light.co.uk


1008250 495

PURI 2.0 TUBE
1-PHASE, QPAR51





IP20 IK02 350° 90°

220-240 V ~50/60 Hz
Material: Aluminium

SOCKET INSIDE 6 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.	GBP
black	1008242	35.00
black/gold	1008243	35.00
white	1008244	35.00
grey	1008245	35.00

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no.: 1005077 **7.00 GBP**


SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: 1012469 **23.00 GBP**

PURI 2.0 CONE
1-PHASE, QPAR51





IP20 IK02 350° 90°

220-240 V ~50/60 Hz
Material: Aluminium

SOCKET INSIDE 6 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.	GBP
black	1008246	35.00
black/gold	1008247	35.00
white	1008248	35.00
grey	1008249	35.00

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no.: 1005077 **7.00 GBP**


SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: 1012469 **23.00 GBP**

PURI 2.0 DOME
1-PHASE, QPAR51





IP20 IK02 350° 90°

220-240 V ~50/60 Hz
Material: Aluminium

SOCKET INSIDE 6 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.	GBP
black	1008250	35.00
black/gold	1008251	35.00
white	1008252	35.00
grey	1008253	35.00

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no.: 1005077 **7.00 GBP**


SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: 1012469 **23.00 GBP**


1008263 497

PURI 2.0 TUBE
1-PHASE, PD, QPAR51

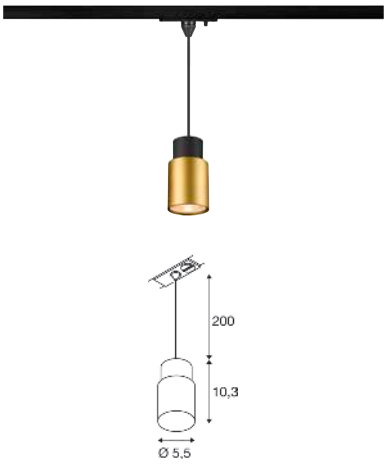

IP20 IK02 200 cm

220-240 V ~50/60 Hz
Material: Aluminium

SOCKET INSIDE 6 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.	GBP
black	1008254	39.00
black/gold	1008255	39.00
white	1008256	39.00
grey	1008257	39.00

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F


Prod. no.: 1005077 **7.00 GBP**

SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: 1012469 **23.00 GBP**

PURI 2.0 CONE
1-PHASE, PD, QPAR51

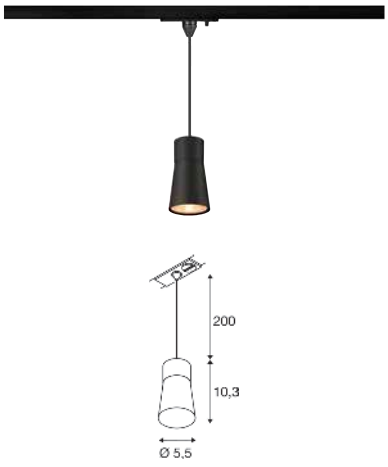

IP20 IK02 200 cm

220-240 V ~50/60 Hz
Material: Aluminium

SOCKET INSIDE 6 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.	GBP
black	1008258	39.00
black/gold	1008259	39.00
white	1008260	39.00
grey	1008261	39.00

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F


Prod. no.: 1005077 **7.00 GBP**

SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: 1012469 **23.00 GBP**

PURI 2.0 DOME
1-PHASE, QPAR51

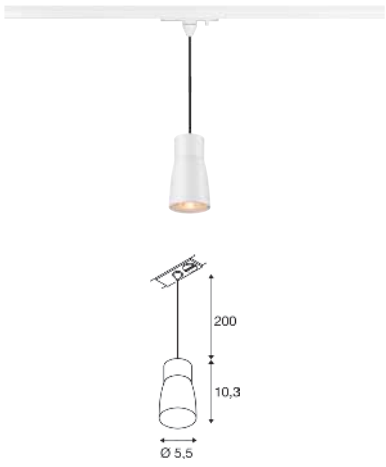

IP20 IK02 200 cm

220-240 V ~50/60 Hz
Material: Aluminium

SOCKET INSIDE 6 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.	GBP
black	1008262	39.00
black/gold	1008263	39.00
white	1008264	39.00
grey	1008265	39.00


GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no.: 1005077 **7.00 GBP**

SMART


GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F


Prod. no.: 1012469 **23.00 GBP**

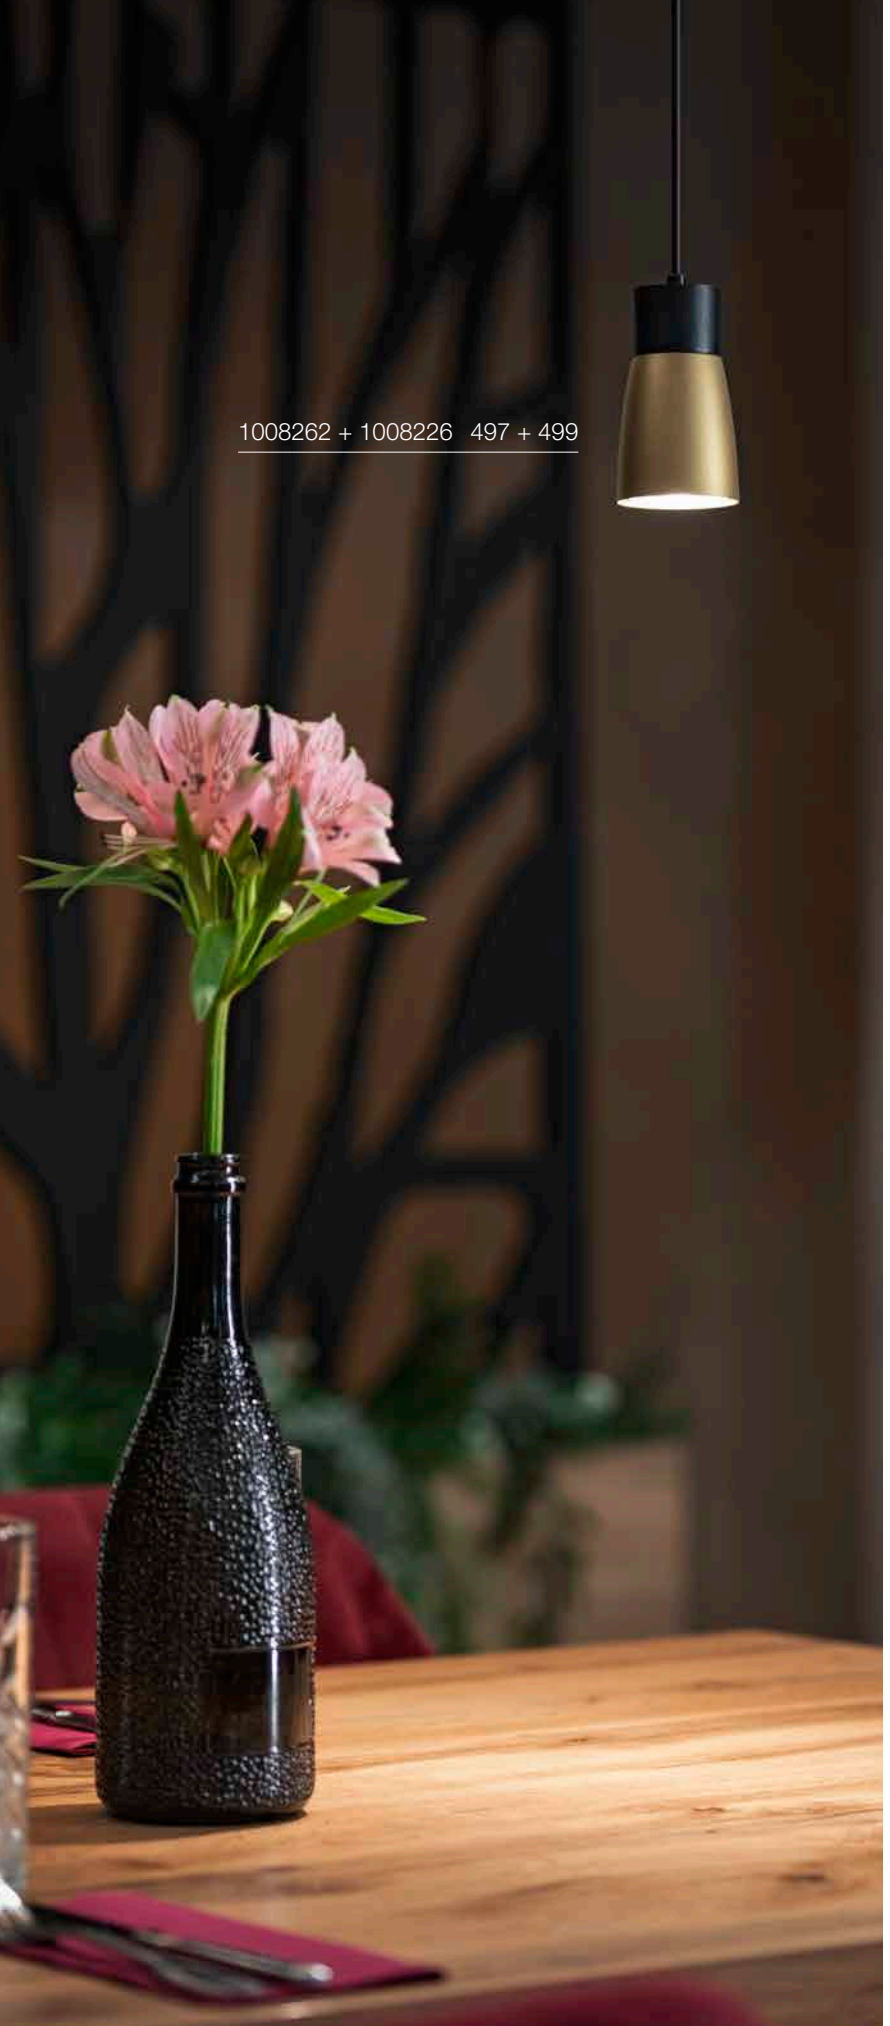

1008262 + 1008226 497 + 499

PURI 2.0
1-PHASE, TRIPLE TRACK SET, QPAR51







220-240 V ~50/60 Hz
Material: Aluminium

- Consists of:
  2 x 1 m track,
  1 x longitudinal connector with feed-in,
  1 x 2 end caps,
  3 x PURI 2.0 light heads,
  3 x GU10 2700K lamps



Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.	GBP
● black	**1008903**	**183.00**
◐ black/gold	**1008904**	**183.00**
○ white	**1008902**	**183.00**

PURI 2.0 CONE
SHADE



Ø: 5.5 cm
H: 6.5 cm
Material: Aluminium

Variant	Prod. no.	GBP
black	1008219	8.00
white	1008218	8.00
gold	1008221	8.00
grey	1008220	8.00
bronze	1008222	8.00
aluminium	1008377	8.00

PURI 2.0 DOME
SHADE



Ø: 5.5 cm
H: 6.5 cm
Material: Aluminium

Variant	Prod. no.	GBP
black	1008224	8.00
white	1008223	8.00
gold	1008226	8.00
grey	1008225	8.00
bronze	1008227	8.00
aluminium	1008378	8.00

PURI 2.0 TUBE
SHADE




Ø: 5.5 cm
H: 6.5 cm
Material: Aluminium

Variant	Prod. no.	GBP
black	1008214	8.00
white	1008213	8.00
gold	1008216	8.00
grey	1008215	8.00
bronze	1008217	8.00
aluminium	1008376	8.00

ENOLA® 2.0 S
1-PHASE, SINGLE,
GU10 MINI, PAR11





IP20 IK02 350° 90°

220-240 V ~50/60 Hz
Material: Aluminium/Plastic PC

SOCKET INSIDE 5 W

Base: 1xGU10 | max. Ø: 3.6 cm | L: 4.6 cm

Variant	Prod. no.	GBP
● black	1011723	48.00
○ white	1011724	48.00

GU10 | 5 W | 36°
390 lm | 2700 K | EEC = F


C,L

Prod. no.: 1011670 10.00 GBP

Product	Prod. no.	GBP
ENOLA® 2.0 S, Decorative Ring		
● black	1011753	4.00
○ white	1011754	4.00
gold	1011755	4.00
copper	1011756	4.00

ENOLA® 2.0 S
1-PHASE, PD, SINGLE,
GU10 MINI, PAR11





IP20 IK02 200 cm

220-240 V ~50/60 Hz
Material: Aluminium/Plastic PC

SOCKET INSIDE 5 W

Base: 1xGU10 | max. Ø: 3.6 cm | L: 4.6 cm

Variant	Prod. no.	GBP
● black	1011727	60.00
○ white	1011728	60.00

GU10 | 5 W | 36°
390 lm | 2700 K | EEC = F

C,L

Prod. no.: 1011670 10.00 GBP

Product	Prod. no.	GBP
ENOLA® 2.0 S, Decorative Ring		
● black	1011753	4.00
○ white	1011754	4.00
gold	1011755	4.00
copper	1011756	4.00

ENOLA® 2.0 S
DECORATIVE RING




Ø: 3.9 cm
H: 1.1 cm
Material: Plastic PC

Variant	Prod. no.	GBP
● black	1011753	4.00
○ white	1011754	4.00
gold	1011755	4.00
copper	1011756	4.00

ENOLA® 2.0 M
1-PHASE, SINGLE, GU10, QPAR51





IP20 IK02 350° 90°

220-240 V ~50/60 Hz
Material: Aluminium/Plastic PC

SOCKET INSIDE 10 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 6 cm

Variant	Prod. no.	GBP
● black	1011713	52.00
○ white	1011714	52.00

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

C,L

Prod. no.: 1005076 7.00 GBP

SMART


GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: 1012469 23.00 GBP

Product	Prod. no.	GBP
ENOLA® 2.0/BIMA 2.0 M, Decorative Ring		
● black	1011749	4.00
○ white	1011750	4.00
● gold	1011751	4.00
● copper	1011752	4.00

ENOLA® 2.0 M
1-PHASE, PD, SINGLE, GU10, QPAR51





IP20 IK02 200 cm

220-240 V ~50/60 Hz
Material: Aluminium/Plastic PC

SOCKET INSIDE 10 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 6 cm

Variant	Prod. no.	GBP
● black	1011717	68.00
○ white	1011718	68.00

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

C,L

Prod. no.: 1005076 7.00 GBP

SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: 1012469 23.00 GBP

Product	Prod. no.	GBP
ENOLA® 2.0/BIMA 2.0 M, Decorative Ring		
● black	1011749	4.00
○ white	1011750	4.00
● gold	1011751	4.00
● copper	1011752	4.00

ENOLA® 2.0/BIMA 2.0 M
DECORATIVE RING




Ø: 5.4 cm
H: 2 cm
Material: Plastic PC

Variant	Prod. no.	GBP
● black	1011749	4.00
○ white	1011750	4.00
● gold	1011751	4.00
● copper	1011752	4.00



BIMA 2.0
1-PHASE, SINGLE, QPAR51





IP20 IK02 350° 90°

220-240 V ~50/60 Hz
Material: Aluminium/Plastic

SOCKET INSIDE 10 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.4 cm

Variant	Prod. no.	GBP
● black	**1011759**	**42.00**
○ white	**1011760**	**42.00**

GU10 | 6 W | 38°
470 lm | 3000 K | EEC = F

C,L

Prod. no.: 1005079 7.00 GBP

SMART


GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: 1012469 23.00 GBP

Product	Prod. no.	GBP
ENOLA® 2.0/BIMA 2.0 M, Decorative Ring		
● black	**1011749**	**4.00**
○ white	**1011750**	**4.00**
● gold	**1011751**	**4.00**
● copper	**1011752**	**4.00**

BIMA 2.0
1-PHASE, DOUBLE, QPAR51





IP20 IK02 350° 90°

220-240 V ~50/60 Hz
Material: Aluminium/Plastic

SOCKET INSIDE 10 W

Base: 2xGU10 | max. Ø: 5.1 cm | L: 5.4 cm

Variant	Prod. no.	GBP
● black	**1011761**	**68.00**
○ white	**1011762**	**68.00**

GU10 | 6 W | 38°
470 lm | 3000 K | EEC = F

C,L

Prod. no.: 1005079 7.00 GBP

SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F


Prod. no.: 1012469 23.00 GBP

Product	Prod. no.	GBP
ENOLA® 2.0/BIMA 2.0 M, Decorative Ring		
● black	**1011749**	**4.00**
○ white	**1011750**	**4.00**
● gold	**1011751**	**4.00**
● copper	**1011752**	**4.00**


1008399 505

GRIP! S
1-PHASE, PHASE, Ø 3,0 CM





C,L · IP20 · IK02 · 29° · 330° · 90° · 50 000 h L80B10 · UGR 25

220-240 V ~50/60 Hz | 250 mA
Total wattage: 11 W
Material: Aluminium

- Honeycomb accessories included


LED INSIDE · CRI 90

1008390 **1008392** **1008393** **1008394**	Down	2700 K 530 lm
1008395 **1008397** **1008398** **1008399**	Down	3000 K 610 lm

Variant	Prod. no.	GBP
black/gold 530 lm | 2700 K	**1008392**	**147.00**
black/gold 610 lm | 3000 K	**1008397**	**147.00**
white/black 530 lm | 2700 K	**1008390**	**147.00**
white/black 610 lm | 3000 K	**1008395**	**147.00**
gold/black 530 lm | 2700 K	**1008394**	**147.00**
gold/black 610 lm | 3000 K	**1008399**	**147.00**
bronze/black 530 lm | 2700 K	**1008393**	**147.00**
bronze/black 610 lm | 3000 K	**1008398**	**147.00**

GRIP! S
1-PHASE, PHASE, Ø 3,0 CM





C,L · IP20 · IK02 · 29° · 330° · 90° · 50 000 h L80B20 · UGR 25

220-240 V ~50/60 Hz | 250 mA
Total wattage: 11 W
Material: Aluminium

- Honeycomb accessories included


LED INSIDE · DIM TO WARM · CRI 90

Down	2000 K - 3000 K 350 lm - 350 lm	

Variant	Prod. no.	GBP
black/gold	**1008402**	**147.00**
white/black	**1008400**	**147.00**
gold/black	**1008404**	**147.00**
bronze/black	**1008403**	**147.00**

GRIP! M
1-PHASE, PHASE, Ø 4,3 CM





C,L IP20 IK02 42° 330° 90°

50 000 h L80B10 UGR 19

220-240 V ~50/60 Hz | 500 mA
Total wattage: 20 W
Material: Aluminium

- Honeycomb accessories included


LED INSIDE CRI 90

1008420 **1008422** **1008423** **1008424**	Down	2700 K 1810 lm
1008425 **1008427** **1008428** **1008429**	Down	3000 K 1900 lm

Variant	Prod. no.	GBP
black/gold 1810 lm | 2700 K	**1008422**	**155.00**
black/gold 1900 lm | 3000 K	**1008427**	**155.00**
white/black 1810 lm | 2700 K	**1008420**	**155.00**
white/black 1900 lm | 3000 K	**1008425**	**155.00**
gold/black 1810 lm | 2700 K	**1008424**	**155.00**
gold/black 1900 lm | 3000 K	**1008429**	**155.00**
bronze/black 1810 lm | 2700 K	**1008423**	**155.00**
bronze/black 1900 lm | 3000 K	**1008428**	**155.00**

GRIP! M
1-PHASE, PHASE, Ø 4,3 CM





C,L IP20 IK02 42° 330° 90°

50 000 h L80B20 UGR 19

220-240 V ~50/60 Hz | 350 mA
Total wattage: 15 W
Material: Aluminium

- Honeycomb accessories included


LED INSIDE DIM TO WARM CRI 90

Down	2000 K - 3000 K 1000 lm - 1000 lm	

Variant	Prod. no.	GBP
black/gold	**1008432**	**155.00**
white/black	**1008430**	**155.00**
gold/black	**1008434**	**155.00**
bronze/black	**1008433**	**155.00**

GRIP! L
1-PHASE, QPAR51, Ø 5,7 CM





IP20 IK02 360° 90°

220-240 V ~50/60 Hz
Material: Aluminium

- Honeycomb accessories included

SOCKET INSIDE 6 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.	GBP
black/gold	**1008449**	**77.00**
white/black	**1008447**	**77.00**
gold/black	**1008451**	**77.00**
bronze/black	**1008450**	**77.00**

GU10 | 6 W | 38°
470 lm | 3000 K | EEC = F

C,L

Prod. no.: 1005080 7.00 GBP


SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: 1012469 23.00 GBP

GRIP! L
1-PHASE, PD, QPAR51, Ø 5,7 CM





IP20 IK02 200 cm

220-240 V ~50/60 Hz
Material: Aluminium

- Honeycomb accessories included

SOCKET INSIDE 6 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.	GBP
black/gold	**1008471**	**121.00**
white/black	**1008469**	**121.00**
gold/black	**1008473**	**121.00**
bronze/black	**1008472**	**121.00**

GU10 | 6 W | 38°
470 lm | 3000 K | EEC = F

C,L

Prod. no.: 1005080 7.00 GBP

SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: 1012469 23.00 GBP


1008473 507

GRIP! S
DECORATIVE RING + SPACER



NEW

Ø: 2.7 cm
H: 1.1 cm
Material: Aluminium

Variant	Prod. no.	GBP
black	1011830	16.00
white	1011829	16.00
gold	1011832	16.00
Nickel	1011831	16.00

GRIP! M
DECORATIVE RING + SPACER



NEW

Ø: 4 cm
H: 1.4 cm
Material: Aluminium

Variant	Prod. no.	GBP
black	1011834	18.00
white	1011833	18.00
gold	1011836	18.00
Nickel	1011835	18.00

GRIP! L
DECORATIVE RING



Ø: 5.4 cm
H: 2.1 cm
Material: Aluminium


Variant	Prod. no.	GBP
black	1008497	21.00
white	1008496	21.00
gold	1008499	21.00
Nickel	1008498	21.00



1009133 + 1010406 511

GRIP! FLAT
1-PHASE, PHASE





C,L · IP20 · 330° · 84° · 50000h L70B50 · UGR 15

220-240 V ~50/60 Hz | 500 mA
Total wattage: 16 W
Material: Aluminium

- Including colour temperature switch 2700K/3000K
- Honeycomb included
- More colour options with optional decorative rings

LED INSIDE · CCT · CRI 90


	2700 K	3000 K
Down	400 lm	430 lm

Variant	Prod. no.	GBP
● black	**1009131**	**239.00**
○ white	**1009132**	**239.00**

Product	Prod. no.	GBP
GRIP! FLAT, decorative ring		
● black	**1009102**	**28.00**
○ white	**1009103**	**28.00**
● gold	**1009104**	**28.00**

GRIP! FLAT
1-PHASE, PD, PHASE





C,L · IP20 · 50000h L70B50 · 200 cm · UGR 15

220-240 V ~50/60 Hz | 500 mA
Total wattage: 16 W

- Including colour temperature switch 2700K/3000K
- Honeycomb included


LED INSIDE · CCT · CRI 90

	2700 K	3000 K
Down	400 lm	430 lm

Variant	Prod. no.	GBP
● black	**1009133**	**247.00**
○ white	**1009134**	**247.00**

Product	Prod. no.	GBP
GRIP! FLAT, decorative ring		
● black	**1009102**	**28.00**
○ white	**1009103**	**28.00**
● gold	**1009104**	**28.00**


GRIP! FLAT
FELT SHADE Ø 50 CM X 6.2 CM



Ø: 50 cm
H: 6.2 cm

Variant	Prod. no.	GBP
● Anthracite	**1010403**	**121.00**
● grey	**1010404**	**121.00**
● Ochre	**1010405**	**121.00**

GRIP! FLAT
FELT SHADE Ø 50 CM X 0.6 CM




Ø: 50 cm
H: 0.6 cm

Variant	Prod. no.	GBP
● Anthracite	**1010406**	**88.00**
● grey	**1010407**	**88.00**
● Ochre	**1010408**	**88.00**


1010324 513

DYSKO
1PH., PHASE





C IP20 IK02 36° 360° 90° 50000 h L80B10

220-240 V ~50/60 Hz | 150 mA
Total wattage: 6.7 W
Material: Plastic PC/Aluminium

- Intrack LED driver adapter


LED INSIDE CRI 90

	2700 K
	750 lm

Variant	Prod. no.	GBP
black	1010320	163.00
black/gold	1010318	161.00
white/black	1010319	161.00

DYSKO
1PH., PD, PHASE





C IP20 IK02 36° 50000 h L80B10 200 cm

220-240 V ~50/60 Hz | 150 mA
Total wattage: 6.7 W
Material: Plastic PC/Aluminium

- Intrack LED driver adapter


LED INSIDE CRI 90

	2700 K
	750 lm

Variant	Prod. no.	GBP
black	1010326	172.00
black/gold	1010324	169.00
white/black	1010325	169.00

LIGHT EYE® 90
1-PHASE, QPAR51





IP20 330° 90°

220-240 V ~50/60 Hz
Material: Steel

SOCKET INSIDE 6 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.4 cm

Variant	Prod. no.	GBP
● black	**1008180**	**73.00**
○ white	**1008181**	**73.00**


GU10 | 6 W | 38°
470 lm | 3000 K | EEC = F

C,L

Prod. no.: 1005080 7.00 GBP

LIGHT EYE® 150
1-PHASE, QPAR111





IP20 330° 90°

220-240 V ~50/60 Hz
Material: Steel

SOCKET INSIDE 13 W

Base: 1xGU10 | max. Ø: 11.1 cm | L: 7 cm

Variant	Prod. no.	GBP
● black	**1008182**	**113.00**
○ white	**1008183**	**113.00**


GU10 | 12 W | 55°
680 lm | 3000 K | EEC = G

C,L

Prod. no.: 1005298 73.00 GBP

LIGHT EYE® 90
1-PHASE, PD, QPAR51





IP20 150 cm

220-240 V ~50/60 Hz
Material: Steel

SOCKET INSIDE 6 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.35 cm

Variant	Prod. no.	GBP
● black	1008168	73.00
○ white	1008169	73.00

GU10 | 6 W | 38°
470 lm | 3000 K | EEC = F

C,L

Prod. no.: 1005080 7.00 GBP


SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: 1012469 23.00 GBP

LIGHT EYE® 150
1-PHASE, PD, QPAR111





IP20 150 cm

220-240 V ~50/60 Hz
Material: Steel

SOCKET INSIDE 13 W

Base: 1xGU10 | max. Ø: 11.1 cm | L: 7 cm

Variant	Prod. no.	GBP
● black	1008174	113.00
○ white	1008175	113.00

GU10 | 12 W | 55°
680 lm | 3000 K | EEC = G

C,L

Prod. no.: 1005298 73.00 GBP

LIGHT EYE® 90
DECORATIVE RING Ø 5.7 CM



Ø: 5.9 cm
H: 1.4 cm
Material: Steel

Variant	Prod. no.	GBP
● black	1008186	8.00
○ white	1008187	8.00
● gold	1008188	13.00
◑ chrome	151049	13.00

LIGHT EYE® 150
DECORATIVE RING Ø 13.6 CM



Ø: 13.6 cm
H: 2.3 cm
Material: Steel


Variant	Prod. no.	GBP
● black	1008189	31.00
○ white	1008190	31.00
● gold	1008192	39.00
◑ chrome	1008191	39.00



1010450 517

LIGHT EYE® 2.0
1-PHASE, PHASE, Ø 7,5 CM







220-240 V ~50/60 Hz | 250 mA
Total wattage: 11 W
Material: Aluminium


LED INSIDE CRI 90

1010448 **1010449**	Down	2700 K 1150 lm
1010450 **1010451**	Down	3000 K 1200 lm

Variant	Prod. no.	GBP
● black 1150 lm | 2700 K	**1010448**	**126.00**
● black 1200 lm | 3000 K	**1010450**	**126.00**
◐ white/black 1150 lm | 2700 K	**1010449**	**126.00**
◐ white/black 1200 lm | 3000 K	**1010451**	**126.00**

LIGHT EYE® 2.0
1-PHASE, PD, Ø 7,5 CM







220-240 V ~50/60 Hz | 250 mA
Total wattage: 11 W
Material: Aluminium

LED INSIDE CRI 90


1010452 **1010453**	Down	2700 K 1150 lm
1010454 **1010455**	Down	3000 K 1200 lm

Variant	Prod. no.	GBP
● black 1150 lm | 2700 K	**1010452**	**138.00**
● black 1200 lm | 3000 K	**1010454**	**138.00**
◐ white/black 1150 lm | 2700 K	**1010453**	**138.00**
◐ white/black 1200 lm | 3000 K	**1010455**	**138.00**


Coffee MENU
KNOW YOUR COFFEE

KALU 2.0
1-PHASE, PHASE





C | IP20 | IK02 | 36° | 340° | 90° | 50000 h L90B10 | UGR 22

220-240 V ~50/60 Hz | 250 mA
Total wattage: 10 W
Material: Aluminium

LED INSIDE | CRI 90

1010222 **1010224**	Down	2700 K 1400 lm
1010226 **1010228**	Down	3000 K 1450 lm
1010230 **1010232**	Down	4000 K 1500 lm


Variant	Prod. no.	GBP
● black 1400 lm | 2700 K	**1010222**	**127.00**
● black 1450 lm | 3000 K	**1010226**	**127.00**
● black 1500 lm | 4000 K	**1010230**	**127.00**
○ white 1400 lm | 2700 K	**1010224**	**127.00**
○ white 1450 lm | 3000 K	**1010228**	**127.00**
○ white 1500 lm | 4000 K	**1010232**	**127.00**

⊕

Product	Prod. no.	GBP
KALU 2.0, decorative ring		
○ white	**1010135**	**8.00**
● black	**1010136**	**8.00**
● gold	**1010138**	**8.00**
● copper	**1010139**	**8.00**
KALU 2.0, lens		
○ transparent | 15°	**1010140**	**17.00**
○ transparent | 24°	**1010141**	**17.00**
○ transparent | 36°	**1010142**	**17.00**
○ transparent | 60°	**1010143**	**17.00**

KALU TRACK
1-PHASE, QPAR111





IP20 | 350° | 90°

220-240 V ~50/60 Hz
Material: Aluminium/Plastic

SOCKET INSIDE | 75 W

Base: 1xGU10

Variant	Prod. no.	GBP
● black	**143540**	**66.00**
○ white	**143541**	**66.00**
● grey	**143544**	**66.00**

GU10 | 12 W | 55°
670 lm | 2700 K | EEC = G


C,L

Prod. no.: 1005297 73.00 GBP



NOBLO® SPOT
1-PHASE, TRIPLE TRACK SET





IP20 | 32° | 320° | 90° | 50000 h L80B10

220-240 V ~50/60 Hz | 150 mA
Total wattage: 19 W
Material: Aluminium

- Consists of
  2 x 1 m track,
  1 x longitudinal connector with feed-in option,
  1 x 2 end caps,
  3 x NOBLO® lamp head


INSIDE | CRI 90

	2700 K
	2250 lm

Variant	Prod. no.	GBP
● black	**1007673**	**219.00**
○ white	**1007674**	**219.00**

NOBLO® SPOT
1-PHASE, PHASE





IP20 | 32° | 355° | 90° | 50000 h L80B10

220-240 V ~50/60 Hz | 150 mA
Total wattage: 6 W
Material: Aluminium/Polycarbonate (PC)

INSIDE

	2700 K
1007638 **1007639** **1007640**	740 lm
	3000 K
1007641 **1007642** **1007643**	750 lm


Variant	Prod. no.	GBP
● black 740 lm | 2700 K	**1007638**	**61.00**
● black 750 lm | 3000 K	**1007641**	**61.00**
○ white 740 lm | 2700 K	**1007639**	**61.00**
○ white 750 lm | 3000 K	**1007642**	**61.00**
● grey 740 lm | 2700 K	**1007640**	**61.00**
● grey 750 lm | 3000 K	**1007643**	**61.00**

⊕

Product	Prod. no.	GBP
Decorative ring		
● black	**1008482**	**6.00**
○ white	**1008483**	**6.00**
● gold	**1008484**	**6.00**
● grey	**1008485**	**6.00**
● bronze	**1008486**	**6.00**
● copper	**1008487**	**6.00**

NOBLO® SPOT
1-PHASE, PHASE





IP20 | 36° | 355° | 90° | 40000 h L70B50

220-240 V ~50/60 Hz | 350 mA
Total wattage: 8.4 W
Material: Aluminium/Polycarbonate (PC)

INSIDE | DIM TO WARM | CRI 90

	2000 K - 3000 K
	30 lm - 450 lm

Variant	Prod. no.	GBP
● black	**1007352**	**73.00**
○ white	**1007353**	**73.00**
● grey	**1007354**	**73.00**


⊕

Product	Prod. no.	GBP
Decorative ring		
● black	**1008482**	**6.00**
○ white	**1008483**	**6.00**
● gold	**1008484**	**6.00**
● grey	**1008485**	**6.00**
● bronze	**1008486**	**6.00**
● copper	**1008487**	**6.00**


1006445 523

ASTO TUBE
1-PHASE, GU10





IP20 | 350° | 90°

220-240 V ~50/60 Hz
Material: Aluminium

• Decorative rings available as accessories

SOCKET INSIDE | 10 W

Base: 1xGU10

Variant	Prod. no.	GBP
● black	**1006445**	**61.00**
○ white	**1006446**	**61.00**


GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

C,L

Prod. no.: 1005077 7.00 GBP

ASTO TUBE
1-PHASE, PD, GU10





IP20 | 250 cm

220-240 V ~50/60 Hz
Material: Aluminium

SOCKET INSIDE | 10 W

Base: 1xGU10 max. Ø: 5 cm | L: 6 cm

Variant	Prod. no.	GBP
● black	**1010099**	**68.00**
○ white	**1010100**	**68.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

C,L

Prod. no.: 1005076 7.00 GBP

SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: 1012469 23.00 GBP

ASTO TUBE
DECORATIVE REFLECTOR




Ø: 6.8 cm
H: 4 cm
Material: polycarbonate (PC)

Variant	Prod. no.	GBP
black/chrome	**1007190**	**4.00**
gold	**1006450**	**4.00**
chrome	**1006449**	**4.00**
copper	**1006451**	**4.00**


1009140 525

PARA CONE GL
1-PHASE, GU10





IP20 300° 90°

220-240 V ~50/60 Hz
Material: Aluminium/Glass

SOCKET INSIDE 25 W

Base: 1xGU10

Variant	Prod. no.	GBP
black	1006155	77.00
white	1006156	77.00

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

C,L

Prod. no.: 1005077 7.00 GBP


SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: 1012469 23.00 GBP

PARA CONE 14
1-PHASE, GU10





IP20 300° 80°

220-240 V ~50/60 Hz
Material: Steel

SOCKET INSIDE 25 W

Base: 1xGU10

Variant	Prod. no.	GBP
black/gold	1008052	74.00
white/gold	1008053	74.00
copper/white	1008054	77.00
aluminium	1009138	77.00

GU10 | 3 W | 360°
270 lm | 2700 K | EEC = G

C

Prod. no.: 1006321 42.00 GBP


SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: 1012469 23.00 GBP

PARA CONE 14
1-PHASE, PD, GU10





IP20 150 cm

220-240 V ~50/60 Hz
Material: Steel

SOCKET INSIDE 35 W

Base: 1xGU10

Variant	Prod. no.	GBP
black/gold	1008058	100.00
white/gold	1008059	100.00
copper/white	1008060	109.00
aluminium	1009140	109.00

GU10 | 3 W | 360°
270 lm | 2700 K | EEC = G

C

Prod. no.: 1006321 42.00 GBP

SMART


GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: 1012469 23.00 GBP


1004935 527

HELIA 50 TRACK
1-PHASE







220-240 V ~50/60 Hz | 500 mA
Total wattage: 11 W
Material: Aluminium




	3000 K
143580	920 lm
143581	970 lm

Variant	Prod. no.	GBP
● black 920 lm	**143580**	**79.00**
○ white 970 lm	**143581**	**79.00**

PANEL TRACK
1-PHASE, SQUARE







220-240 V ~50/60 Hz | 450 mA
Total wattage: 18 W
Material: Polycarbonate (PC)/Steel




	3000 K
	1800 lm

Variant	Prod. no.	GBP
● black	**1004933**	**84.00**
○ white	**1004934**	**84.00**

PANEL TRACK
1-PHASE, ROUND







220-240 V ~50/60 Hz | 450 mA
Total wattage: 18 W
Material: Polycarbonate (PC)/Steel




	3000 K
	1800 lm

Variant	Prod. no.	GBP
● black	**1004935**	**84.00**
○ white	**1004936**	**84.00**


1001861 529

EURO SPOT TRACK
1-PHASE, QPAR51





IP20 350° 100°

220-240 V ~50/60 Hz
Material: Aluminium

SOCKET INSIDE 25 W

Base: 1xGU10

Variant	Prod. no.	GBP
● black	**1001861**	**68.00**
○ white	**143811**	**68.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

C,L

Prod. no.: **1005077** **7.00 GBP**


SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: **1012469** **23.00 GBP**

ALTRA DICE TRACK
1-PHASE, QPAR51





IP20 350° 180°

220-240 V ~50/60 Hz
Material: Aluminium

SOCKET INSIDE 50 W

Base: 1xGU10

Variant	Prod. no.	GBP
● black	**143350**	**78.00**
○ white	**143351**	**78.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

C,L

Prod. no.: **1005077** **7.00 GBP**

SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: **1012469** **23.00 GBP**

SYMBOLS KEY

Recommendations
Displays accessories and recommended light bulbs for the chosen products

Mix & Match
Indicates products that can be combined

Energy efficiency class
"This light is suitable for bulbs with an energy efficiency rating of ..."

Protection classes
- Protection class I / Protective conductor
- Protection class II/ Protection by double or reinforced insulation
- Protection class III/ Protection by extra-low voltage

Dimmable with:
- **C** = Trailing-edge phase dimmer
- **L** = Leading-edge phase dimmer
- **Uni** = Universal dimmer
- **1–10 V**
- **Dali** = DALI bus system
- **Switch** = Switch/button or touch control on the light
- **Touch** = Simple, stepless operation; responds to touch

IP protection rating:
Indicates the suitability of electrical equipment for different environmental conditions.

IK impact resistance rating:
The IK impact resistance rating is a measure of the resistance of housings for electrical equipment to mechanical stress, especially impact stress.

Half-diffusion angle:
Describes the beam angle in degrees. The smaller the angle, the more concentrated the light will be.

Rotation and pivoting capacity in degrees:
- Rotation range
- Pivot range
- Gimballed

Preservation of luminous flux:
Describes the amount by which the luminous flux of an LED decreases during a specified period.

Unified Glare Rating:
The lower the UGR value, the lower the psychological glare.

Pendant cable length
in cm

Cable length:
Mains plugs, connectors and supply cables (with open cable end) in cm

Through-wiring possible

Shape of the installation opening

Specification of the installation depth

Drive-over capability of the product ensured

Weight-bearing capacity of the product up to the specified value in tonnes. Measurements based on installation in concrete.

Sea-air resistant coating

Independent converter:
Control equipment also for use outside of lights

Short-circuit protected safety control equipment

Light colour temperature in Kelvin (K)

Luminous flux in lumens (lm)

Dark Sky
Indicates that the light emits almost no light into the upper half-space (ULOR < 2 %). Reduces light pollution and ensures targeted, needs-based illumination of the usable area.

Primary/Replica
Indicates lights with integrated primary/replica function. A sensor light (primary) controls downstream lights (replica) via a switched phase, enabling simple, networked lighting control without additional bus or control systems.

Connected lighting:
Indicates smart products that use the following protocols:
- Zigbee®
- DALI
- Bluetooth

Allows the installation of electrical control equipment on materials whose flammability is not known.

CCT switch:
By means of an integrated CCT switch, the light colour can be changed from 2700 K, 3000 K, 4000 K to 6500 K during installation.

Dim-to-warm:
With dimmers, the light colour can be altered from cold white to warm white.

Indicates lights with RGB+W and RGB
(Red-Green-Blue + White and Red-Green-Blue)

Indicates lights with motion sensors
(Microwaves (MR) - Technology / Infrared / Radio)

Products with integrated LEDs

Products with light socket

KS Licht – Your lighting wholesaler in Essen

Contact, customer service and information for customers
BIG WHITE 2027

Directly linked to our product range, advice and project services:

In the KS Multi Brand Business online shop, you will find the latest products, new releases and special offers, as well as information to support you with advice, quotations and project management:

- Online stock availability check
- Catalogues, browsable catalogues and product links
- Technical data, tender specifications, light distribution curves and LDT files
- Easily find and order spare parts
- View your individual terms and conditions, delivery and payment terms
- Relevant product recommendations, variants and alternative products
- Direct contact with our sales team

Customer Information

All prices are net, plus statutory VAT. The retail prices quoted are recommended retail prices. Upon publication of this catalogue, previous price lists cease to be valid.
Illustrations, colours, shapes, designs and technical specifications are for illustrative purposes only and are not binding. Subject to changes and errors.
Goods are generally dispatched ex works, carriage forward.
For orders with a net value of less than €70.00, a minimum order surcharge of €8.00 will be applied.

Ordering & Delivery

When placing orders, please always specify the item number, colour and quantity. This reduces the need for follow-up enquiries and speeds up processing.
Express and direct deliveries are available on request.
Custom-made items, components assembled to the customer's specifications and lamps are excluded from exchange.
Our General Terms and Conditions apply and are available at www.ks-germany.com/de/agb.

Kontakt

KS Licht- und Elektrotechnik GmbH
Manderscheidtstraße 8 c
45141 Essen
Germany

Verkauf & Service
Tel.: +49 (0)201-89924-0
verkauf@ks-germany.com

Online
ks-light.co.uk
www.ks-germany.com

Pflichtangaben

KS Licht- und Elektrotechnik GmbH · Sitz der Gesellschaft: Essen · Geschäftsführer: Kai Becker
Registergericht: Amtsgericht Essen · Handelsregister: HRB 12736 · Steuer-Nr.: 111/5708/2689 ·
USt-IdNr.: DE190673411

KS Licht- und Elektrotechnik GmbH
Manderscheidtstraße 8 c
45141 Essen
Germany

Tel.: +49 (0)201-89924-0

B2B-Shop: **ks-light.co.uk**
Website: www.ks-germany.com
E-Mail: verkauf@ks-germany.com

Opening hours
Monday – Thursday 08:00 – 16:30
Friday 08:00 – 15:00