BIG WHITE®
2027

SLV LIGHTING CATALOGUE



3-PHASE SYSTEMS

INDOOR | 3-PHASE SYSTEM



HAVEN 25 | 555



PURI 2.0 TUBE | 557–561



PURI 2.0 CONE | 557–561



PURI 2.0 DOME | 557–561



BIMA 2.0 | 563



ENOLA® 2.0 S | 564–565



GRIP! | 566–569



NUMINOS® | 572–579



NUMINOS® ZOOM | 580–581



UNIVERSAL TRACKSPOT | 583



NOBLO® SPOT | 585



EURO CUBE 2 | 586–587



KALU 2.0 | 589



KALU TRACK | 589



SIGHT EVO | 590–591



SIGHT PANEL | 592

SIGHT EASY | 593



SIGHT TRACK | 594



SIGHT MOVE | 595



PARA CONE 14 | 596–597



PARA CONE GL | 597



FORCHINI M 40 TRACK | 599



LIGHT EYE® | 600–601



EURO SPOT TRACK | 603



HELIA 50 TRACK | 605

3-PHASE TRACK SYSTEMS

3-phase track systems enable flexible and future-proof lighting design. Multiple circuits within a single track allow different lights to be switched on and off and controlled independently. This is particularly advantageous in sophisticated lighting concepts.

Depending on requirements, variants are available for traditional switching solutions (on/off) as well as for DALI-based lighting control systems.

Thanks to modular track elements and a wide range of lights, it is possible to create bespoke lighting solutions – from accent lighting to uniform basic lighting.

TYPICAL APPLICATIONS:

- Shops & retail spaces
- Gastronomy & hotels
- Exhibitions & museums
- Offices & public spaces

INSTALLATION OPTIONS




Configure power track systems online – from geometric planning to the bill of materials.

Scan the QR code and get started straight away.


SYSTEM STRUCTURE

SELECT A SYSTEM


S-TRACK
3-phase system: On/Off or DALI




EUTRAC
3-phase system



SELECT INSTALLATION TYPE

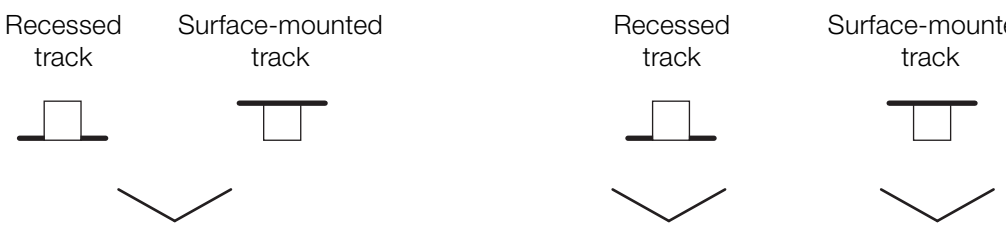


SPECIFY THE VERSION

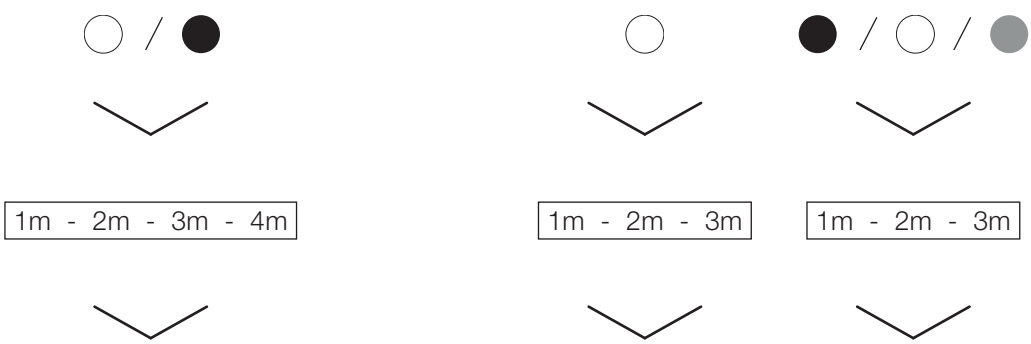

SELECT LIGHTS

Choose from a wide range of decorative and functional lights to tailor the lighting concept to your space.

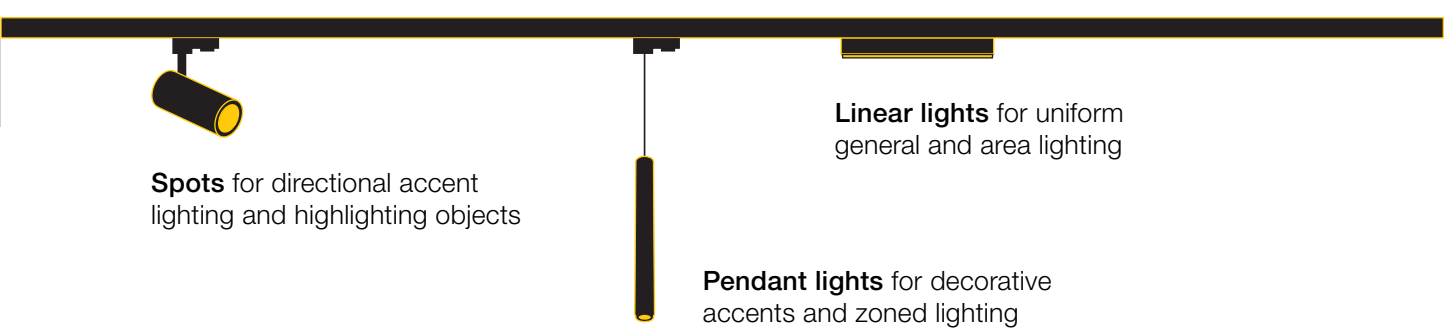




Spots for directional accent lighting and highlighting objects

Linear lights for uniform general and area lighting




Pendant lights for decorative accents and zoned lighting

COMPATIBILITY





TRACK COMPATIBILITY with adaptors from:




	SLV	EUTRAC®	Global/Nordic
SLV S-TRACK tracks and track components 			
3-phase	✓	✓	✓
3-Phase DALI	✓	✗	✓

LIGHT COMPATIBILITY with rails from:

	SLV S-TRACK	EUTRAC®	Global/Nordic
SLV lights with 3-phase adaptors 			
3-phase	✓	✓	✓
3-Phase DALI	✓	✗	✓

SLV's 3-phase track systems and components are compatible with lights and adaptors from EUTRAC®, Global/Nordic, Zumtobel, Erco, LTS ONETrack and unipro®.

Zumtobel	Erco	LTS ONETrack	unipro®
			
✓	✓	✓	✓
✗	✗	✓	✓

Zumtobel	Erco	LTS ONETrack	unipro®
			
✓	✓	✓	✓
✗	✗	✓	✓


Details not guaranteed. Technical data and dimensions are subject to change without notice. During the planning phase of the project, check the project using samples to ensure functionality. Compatibility refers only to tracks/lights. Tracks and track components from different manufacturers should not be combined. Subject to prior testing using light and track samples.



S-TRACK
3-PHASE SURFACE-MOUNTED TRACK, ON/OFF





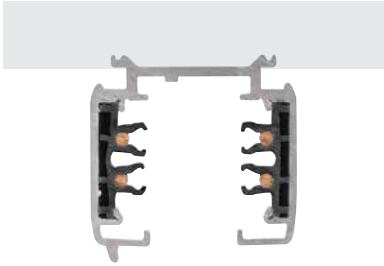


	100 cm	100 cm	200 cm	200 cm
Nominal voltage (V)	220-250 V ~50/60 Hz	220-250 V ~50/60 Hz	220-250 V ~50/60 Hz	220-250 V ~50/60 Hz
Max. current (A)	16 A max.	16 A max.	16 A max.	16 A max.
Colour	● black	○ white	● black	○ white
Material	Aluminium/plastic	Aluminium/plastic	Aluminium/plastic	Aluminium/plastic
L x W x H (cm)	100 cm x 3.6 cm x 3.6 cm	100 cm x 3.6 cm x 3.6 cm	200 cm x 3.6 cm x 3.6 cm	200 cm x 3.6 cm x 3.6 cm
Prod. no.	**175010**	**1001375**	**175020**	**1001376**
GBP	**32.00**	**32.00**	**61.00**	**61.00**

	300 cm	300 cm
Nominal voltage (V)	220-250 V ~50/60 Hz	220-250 V ~50/60 Hz
Max. current (A)	16 A max.	16 A max.
Colour	● black	○ white
Material	Aluminium/plastic	Aluminium/plastic
L x W x H (cm)	300 cm x 3.6 cm x 3.6 cm	300 cm x 3.6 cm x 3.6 cm
Prod. no.	**175030**	**1001377**
GBP	**88.00**	**88.00**

S-TRACK
3-PHASE SURFACE-MOUNTED TRACK, ON/OFF

Planning assistance and accessories at a glance

View of components from above
on the installation side

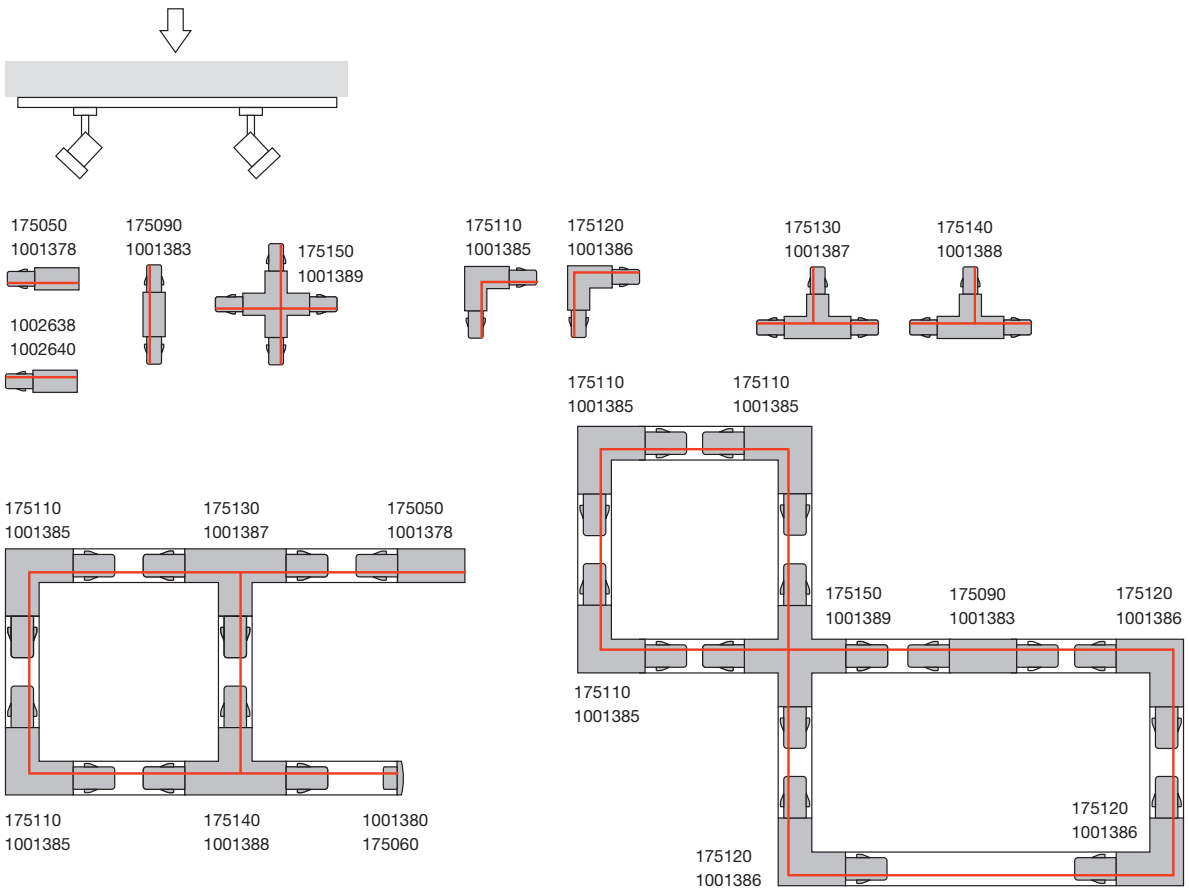



FEED-IN, EARTH RIGHT

16 A max. | 6.5 cm | Aluminium/Plastic
L: 6.5 cm | W: 3.5 cm | H: 3.3 cm


● black	Prod. no.	**175040**	**16.00 GBP**
○ white	Prod. no.	**1001379**	**16.00 GBP**



FEED-IN, EARTH LEFT

16 A max. | 6.5 cm | Aluminium/Plastic
L: 6.5 cm | W: 3.5 cm | H: 3.3 cm

● black	Prod. no.	**175050**	**15.00 GBP**
○ white	Prod. no.	**1001381**	**10.00 GBP**



L-CONNECTOR, EARTH INTERNAL

16 A max. | 6.7 cm | Aluminium/Plastic
L: 6.7 cm | W: 6.7 cm | H: 3.3 cm
Earth internal, with feed-in option.

● black	Prod. no.	**175110**	**26.00 GBP**
○ white	Prod. no.	**1001385**	**26.00 GBP**



L-CONNECTOR, EARTH EXTERNAL

16 A max. | 6.7 cm | Aluminium/Plastic
L: 6.7 cm | W: 6.7 cm | H: 3.3 cm
Earth external, with feed-in option.

● black	Prod. no.	**175120**	**26.00 GBP**
○ white	Prod. no.	**1001386**	**26.00 GBP**



T-CONNECTOR, EARTH LEFT

16 A max. | 10 cm | Aluminium/Plastic
L: 10 cm | W: 6.7 cm | H: 3.3 cm
Earth left, with feed-in capacity

● black	Prod. no.	**175130**	**31.00 GBP**
○ white	Prod. no.	**1001387**	**31.00 GBP**



T-CONNECTOR, EARTH RIGHT

16 A max. | 10 cm | Aluminium/Plastic
L: 10 cm | W: 6.7 cm | H: 3.3 cm
Earth right, with feed capacity

● black	Prod. no.	**175140**	**31.00 GBP**
○ white	Prod. no.	**1001388**	**31.00 GBP**



X-CONNECTOR

16 A max. | 10 cm | Aluminium/Plastic
L: 10 cm | W: 10 cm | H: 3.3 cm
2 circuits

● black	Prod. no.	**175150**	**45.00 GBP**
○ white	Prod. no.	**1001389**	**45.00 GBP**



LONGITUDINAL CONNECTOR WITH FEED-IN CAPACITY

16 A max. | 9.9 cm | Aluminium/Plastic
L: 9.9 cm | W: 3.5 cm | H: 3.3 cm
With feed-in capacity

● black	Prod. no.	**175090**	**26.00 GBP**
○ white	Prod. no.	**1001383**	**26.00 GBP**



FLEX CONNECTOR

16 A max. | 16,2 cm | Aluminium/Plastic
L: 16.2 cm | WB: 3.5 cm | H: 3.3 cm

● black	Prod. no.	**175100**	**38.00 GBP**
○ white	Prod. no.	**1001384**	**38.00 GBP**



MINI-CONNECTOR

16 A max. | 6.8 cm | Aluminium/Plastic
L: 6.8 cm | B: 2.5 cm | H: 2.6 cm

● black	Prod. no.	**175070**	**10.00 GBP**
○ white	Prod. no.	**1001378**	**15.00 GBP**



3-PHASE ADAPTER, ON/OFF

16 A max. | Polycarbonate (PC)
L: 8.4 cm | W: 5.5 cm | H: 3.3 cm

● black	Prod. no.	**175200**	**16.00 GBP**
○ white	Prod. no.	**1001394**	**16.00 GBP**



MINI INSULATING CONNECTOR

16 A max. | 6.8 cm | Plastic
L: 6.8 cm | W: 3.1 cm | H: 2.6 cm

● black	Prod. no.	**175080**	**7.00 GBP**
○ white	Prod. no.	**1001382**	**7.00 GBP**



PENDANT CLIP

4 cm | Steel
L: 4 cm | W: 3.4 cm | H: 1.3 cm

● black	Prod. no.	**1002657**	**7.00 GBP**
○ white	Prod. no.	**1002658**	**7.00 GBP**



COVER, 2M

200 cm | Polycarbonate (PC)
L: 200 cm | W: 2.2 cm | H: 0.8 cm

● black	Prod. no.	**1004939**	**7.00 GBP**
○ white	Prod. no.	**1004940**	**7.00 GBP**



END CAP

3.5 cm | Plastic
L: 3.5 cm | W: 3.3 cm | H: 3.2 cm

● black	Prod. no.	**175060**	**2.00 GBP**
○ white	Prod. no.	**1001380**	**2.00 GBP**

PENDANT SUSPENSION

6 cm | Aluminium/Plastic
L: 6 cm | W: 6 cm | H: 4 cm

● black	Prod. no.	**175160**	**29.00 GBP**
○ white	Prod. no.	**1001390**	**29.00 GBP**



JOINT CONNECTOR

18.2 cm | Aluminium
L: 18.2 cm | W: 3.3 cm | H: 2.1 cm

● black	Prod. no.	**175180**	**11.00 GBP**
○ white	Prod. no.	**1001392**	**11.00 GBP**



MECH. 3-PHASE ADAPTOR WITH HOOK

Plastic/Steel
H: 5.2 cm

● black	Prod. no.	**175190**	**3.00 GBP**
○ white	Prod. no.	**1001393**	**3.00 GBP**



EUTRACK®, S-TRACK AND 1-PHASE TRACKS, 5 M, SET OF TWO

500 cm | Stainless steel/Brass
L: 500 cm

● nickel	Prod. no.	**1002845**	**37.00 GBP**



MECH. 3-PHASE ADAPTOR

6.6 cm | Aluminium/Plastic
L: 6.6 cm | W.,6 cm | H: 3.1 cm


● black	Prod. no.	**175210**	**15.00 GBP**
○ white	Prod. no.	**1001395**	**15.00 GBP**



S-TRACK
3-PHASE SURFACE-MOUNTED TRACK, PHASE & DALI





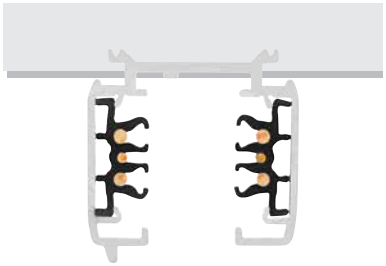


	100 cm	100 cm	200 cm	200 cm
Nominal voltage (V)	220-250V ~50/60Hz	220-250V ~50/60Hz	220-250V ~50/60Hz	220-250V ~50/60Hz
Max. current (A)	16 A max.	16 A max.	16 A max.	16 A max.
Colour	● black	○ white	● black	○ white
Material	Aluminium	Aluminium	Aluminium	Aluminium
L x W x H (cm)	100 cm x 3.6 cm x 3.6 cm	100 cm x 3.6 cm x 3.6 cm	200 cm x 3.6 cm x 3.6 cm	200 cm x 3.6 cm x 3.6 cm
Prod. no.	**1004937**	**1004938**	**1002631**	**1002632**
GBP	**41.00**	**41.00**	**72.00**	**72.00**

	300 cm	300 cm	400 cm	400 cm
Nominal voltage (V)	220-250V ~50/60Hz	220-250V ~50/60Hz	220-250V ~50/60Hz	220-250V ~50/60Hz
Max. current (A)	16 A max.	16 A max.	16 A max.	16 A max.
Colour	● black	○ white	● black	○ white
Material	Aluminium	Aluminium	Aluminium	Aluminium
L x W x H (cm)	300 cm x 3.6 cm x 3.6 cm	300 cm x 3.6 cm x 3.6 cm	400 cm x 3.6 cm x 3.6 cm	400 cm x 3.6 cm x 3.6 cm
Prod. no.	**1002633**	**1002634**	**1002635**	**1002636**
GBP	**105.00**	**105.00**	**130.00**	**130.00**

S-TRACK
3-PHASE SURFACE-MOUNTED TRACK, PHASE & DALI

Planning assistance and accessories at a glance


View of components from above
on the installation side

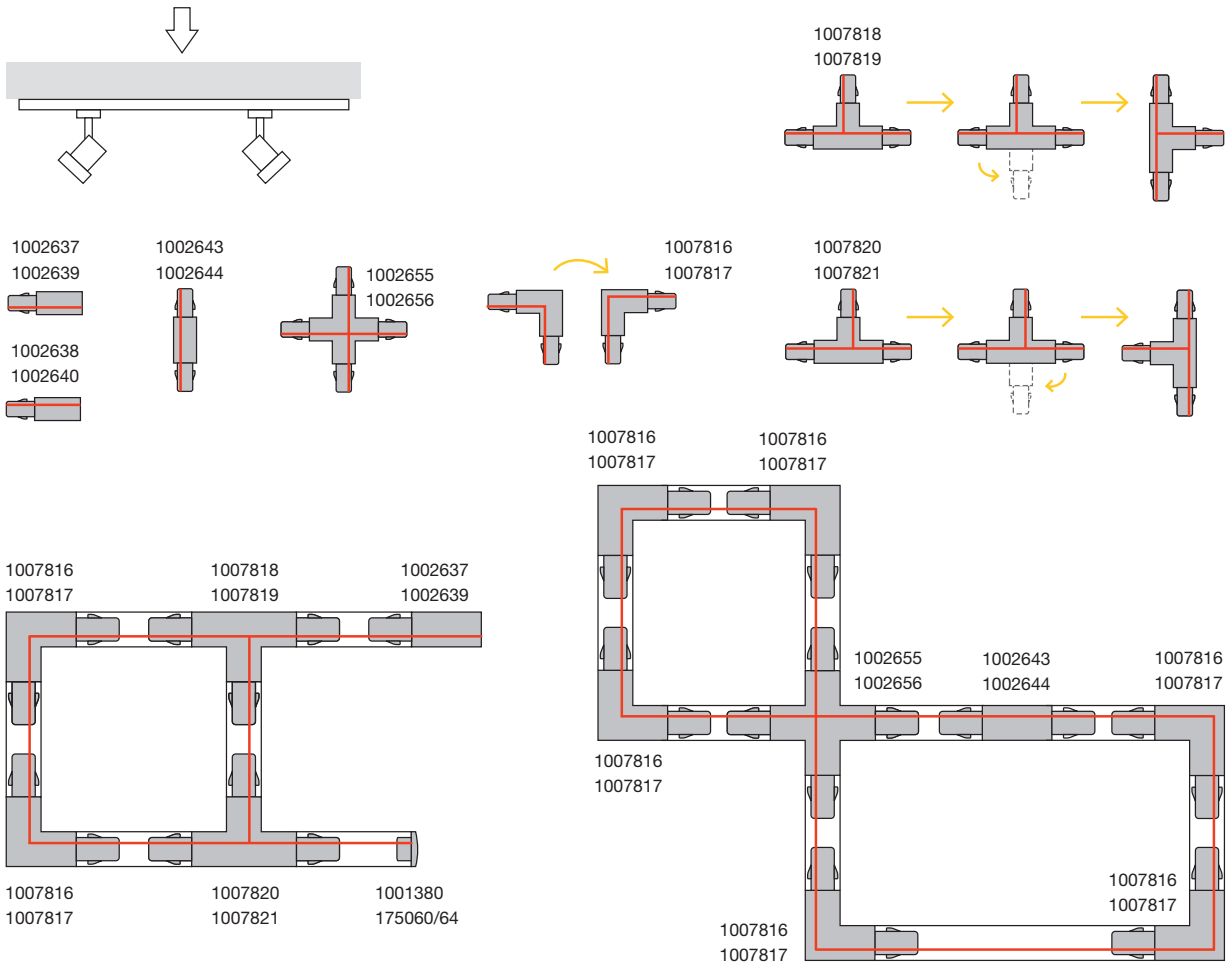



T-CONNECTOR, PHASE & DALI, ADJUSTABLE, LEFT, WITH FEED-IN CAPACITY

16 A max. | 20.3 cm | Polycarbonate (PC)
L: 20.3 cm | W: 11.9 cm | H: 3.3 cm




● black	Prod. no.	**1007818**	**35.00 GBP**
○ white	Prod. no.	**1007819**	**35.00 GBP**



T-CONNECTOR, PHASE & DALI, ADJUSTABLE, RIGHT, WITH FEED-IN CAPACITY

16 A max. | 20.3 cm | Polycarbonate (PC)
L: 20.3 cm | W: 11.9 cm | H: 3.3 cm




● black	Prod. no.	**1007820**	**35.00 GBP**
○ white	Prod. no.	**1007821**	**35.00 GBP**



L-CONNECTOR, PHASE & DALI, ADJUSTABLE, WITH FEED-IN CAPACITY

16 A max. | 11.9 cm | Polycarbonate (PC)
L: 11.9 cm | W: 11.9 cm | H: 3.3 cm



● black	Prod. no.	**1007816**	**30.00 GBP**
○ white	Prod. no.	**1007817**	**30.00 GBP**



FEED-IN, PHASE & DALI, EARTH LEFT

16 A max. | 13.9 cm | Polycarbonate (PC)
L: 13.9 cm | W: 3.5 cm | H: 3.3 cm

● black	Prod. no.	**1002637**	**17.00 GBP**
○ white	Prod. no.	**1002639**	**17.00 GBP**

FEED-IN, PHASE & DALI, EARTH RIGHT



16 A max. | 13.9 cm | Polycarbonate (PC)
L: 13.9 cm | W: 3.5 cm | H: 3.3 cm

● black	Prod. no.	**1002638**	**17.00 GBP**
○ white	Prod. no.	**1002640**	**17.00 GBP**

X-CONNECTOR, PHASE & DALI



16 A max. | 0.3 cm | Polycarbonate (PC)
L: 20.3 cm | W: 20.3 cm | H: 3.3 cm

● black	Prod. no.	**1002655**	**56.00 GBP**
○ white	Prod. no.	**1002656**	**56.00 GBP**

LONGITUDINAL CONNECTOR, PHASE & DALI



16 A max. | 20.3 cm | Polycarbonate (PC)
L: 20.3 cm | W: 3.5 cm | H: 3.3 cm

● black	Prod. no.	**1002643**	**30.00 GBP**
○ white	Prod. no.	**1002644**	**30.00 GBP**

MINI INSULATING CONNECTOR



16 A max. | 6.8 cm | Plastic
L: 6.8 cm | W: 3.1 cm | H: 2.6 cm

● black	Prod. no.	**175080**	**7.00 GBP**
○ white	Prod. no.	**1001382**	**7.00 GBP**

FLEX CONNECTOR, PHASE & DALI



16 A max. | 28.5 cm | Polycarbonate (PC)
L: 28.5 cm | W: 3.5 cm | H: 3.3 cm

● black	Prod. no.	**1002645**	**48.00 GBP**
○ white	Prod. no.	**1002646**	**48.00 GBP**

MINI-CONNECTOR, PHASE & DALI



16 A max. | 10.6 cm | Polycarbonate (PC)
L: 10.6 cm | W: 2.5 cm | H: 2.8 cm

● black	Prod. no.	**1002641**	**10.00 GBP**
○ white	Prod. no.	**1002642**	**10.00 GBP**

PENDANT CLIP



4 cm | Steel
L: 4 cm | W: 3.4 cm | H: 1.3 cm

● black	Prod. no.	**1002657**	**7.00 GBP**
○ white	Prod. no.	**1002658**	**7.00 GBP**

3-PHASE ADAPTER, DALI



16 A max. | 11.3 cm | Polycarbonate (PC)
L: 11.3 cm | W: 5.5 cm | H: 3.3 cm

● black	Prod. no.	**1002660**	**17.00 GBP**
○ white	Prod. no.	**1002659**	**17.00 GBP**

MECH. 3-PHASE ADAPTOR



6.6 cm | Aluminium/Plastic
L: 6.6 cm | W.,6 cm | H: 3.1 cm

● black	Prod. no.	**175210**	**15.00 GBP**
○ white	Prod. no.	**1001395**	**15.00 GBP**

COVER, 2M



200 cm | Polycarbonate (PC)
L: 200 cm | W: 2.2 cm | H: 0.8 cm

● black	Prod. no.	**1004939**	**7.00 GBP**
○ white	Prod. no.	**1004940**	**7.00 GBP**

END CAP



3.5 cm | Plastic
L: 3.5 cm | W: 3.3 cm | H: 3.2 cm

● black	Prod. no.	**175060**	**2.00 GBP**
○ white	Prod. no.	**1001380**	**2.00 GBP**

PENDANT SUSPENSION

6 cm | Aluminium/Plastic
L: 6 cm | W: 6 cm | H: 4 cm

● black	Prod. no.	**175160**	**29.00 GBP**
○ white	Prod. no.	**1001390**	**29.00 GBP**

JOINT CONNECTOR



18.2 cm | Aluminium
L: 18.2 cm | W: 3.3 cm | H: 2.1 cm

● black	Prod. no.	**175180**	**11.00 GBP**
○ white	Prod. no.	**1001392**	**11.00 GBP**

MECH. 3-PHASE ADAPTOR WITH HOOK



Plastic/Steel
H: 5.2 cm

● black	Prod. no.	**175190**	**3.00 GBP**
○ white	Prod. no.	**1001393**	**3.00 GBP**

PHASE & DALI



Polycarbonate (PC)
H: 3.5 cm

● black	Prod. no.	**1004684**	**34.00 GBP**
○ white	Prod. no.	**1004685**	**34.00 GBP**

EUTRACK®, S-TRACK AND 1-PHASE TRACKS, 5 M, SET OF TWO



500 cm | Stainless steel/Brass
L: 500 cm


● nickel	Prod. no.	**1002845**	**37.00 GBP**



S-TRACK
3-PHASE RECESSED TRACK, PHASE & DALI





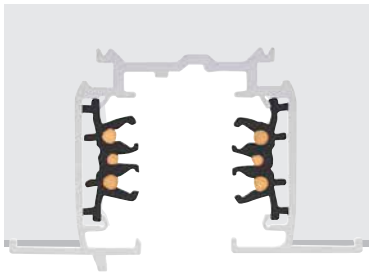


	100 cm	100 cm	200 cm	200 cm
Nominal voltage (V)	220-250 V ~50/60 Hz	220-250 V ~50/60 Hz	220-250 V ~50/60 Hz	220-250 V ~50/60 Hz
Max. current (A)	16 A max.	16 A max.	16 A max.	16 A max.
Colour	● black	○ white	● black	○ white
Material	Aluminium	Aluminium	Aluminium	Aluminium
L x W x H (cm)	100 cm x 5.6 cm x 3.6 cm	100 cm x 5.6 cm x 3.6 cm	200 cm x 5.6 cm x 3.6 cm	200 cm x 5.6 cm x 3.6 cm
Prod. no.	**1006511**	**1006512**	**1006513**	**1006514**
GBP	**47.00**	**47.00**	**84.00**	**84.00**


	300 cm	300 cm	400 cm	400 cm
Nominal voltage (V)	220-250 V ~50/60 Hz	220-250 V ~50/60 Hz	220-250 V ~50/60 Hz	220-250 V ~50/60 Hz
Max. current (A)	16 A max.	16 A max.	16 A max.	16 A max.
Colour	● black	○ white	● black	○ white
Material	Aluminium	Aluminium	Aluminium	Aluminium
L x W x H (cm)	300 cm x 5.6 cm x 3.6 cm	300 cm x 5.6 cm x 3.6 cm	400 cm x 5.6 cm x 3.6 cm	400 cm x 5.6 cm x 3.6 cm
Prod. no.	**1006515**	**1006516**	**1006517**	**1006518**
GBP	**121.00**	**121.00**	**193.00**	**193.00**


S-TRACK
3-PHASE RECESSED TRACK, PHASE & DALI


Planning assistance and accessories at a glance

View of components from above
on the installation side

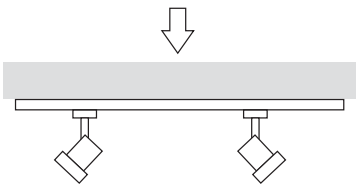

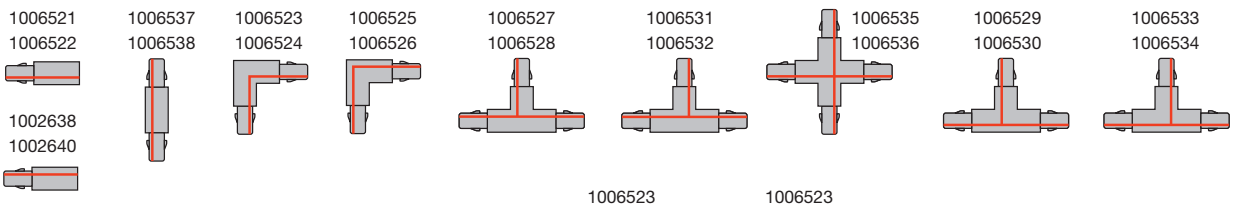

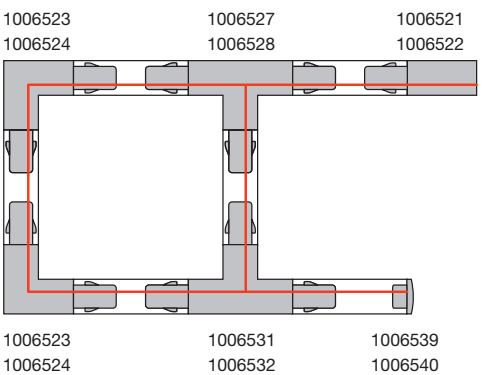

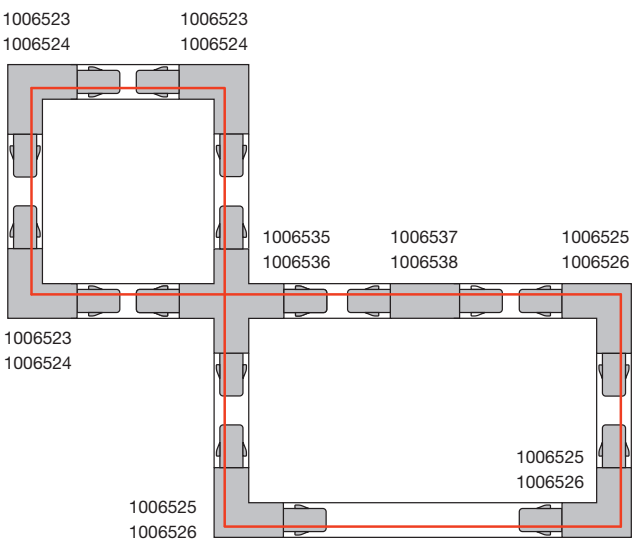

FEED-IN, PHASE & DALI, EARTH LEFT



16 A max. | 14.7 cm | Polycarbonate (PC)
L: 14.7 cm | W: 5.6 cm | H: 3.3 cm

● black	Prod. no.	**1006521**	**22.00 GBP**
○ white	Prod. no.	**1006522**	**22.00 GBP**

FEED-IN, PHASE & DALI, EARTH RIGHT



16 A max. | 14.7 cm | Polycarbonate (PC)
L: 14.7 cm | W: 5.6 cm | H: 3.3 cm

● black	Prod. no.	**1006519**	**22.00 GBP**
○ white	Prod. no.	**1006520**	**22.00 GBP**

L-CONNECTOR, PHASE & DALIE, INTERNAL EARTH, WITH FEED-IN CAPACITY



16 A max. | 13 cm | Polycarbonate (PC)
L: 13 cm | W: 13 cm | H: 3.3 cm

● black	Prod. no.	**1006523**	**30.00 GBP**
○ white	Prod. no.	**1006524**	**30.00 GBP**

L-CONNECTOR, PHASE & DALI, EXTERNAL EARTH, WITH FEED-IN CAPACITY



16 A max. | 13 cm | Polycarbonate (PC)
L: 13 cm | W: 13 cm | H: 3.3 cm

● black	Prod. no.	**1006525**	**30.00 GBP**
○ white	Prod. no.	**1006526**	**30.00 GBP**

T-CONNECTOR, PHASE & DALI, EXTERNAL EARTH RIGHT, WITH FEED-IN CAPACITY



16 A max. | 20.3 cm | Polycarbonate (PC)
L: 20.3 cm | W: 13 cm | H: 3.3 cm

● black	Prod. no.	**1006529**	**35.00 GBP**
○ white	Prod. no.	**1006530**	**35.00 GBP**

T-CONNECTOR, PHASE & DALI, INTERNAL EARTH RIGHT, WITH FEED-IN CAPACITY



16 A max. | 20.3 cm | Polycarbonate (PC)
L: 20.3 cm | W: 13 cm | H: 3.3 cm

● black	Prod. no.	**1006531**	**35.00 GBP**
○ white	Prod. no.	**1006532**	**35.00 GBP**

T-CONNECTOR, PHASE & DALI, INTERNAL EARTH LEFT, WITH FEED-IN CAPACITY



16 A max. | 20.3 cm | Polycarbonate (PC)
L: 20.3 cm | W: 13 cm | H: 3.3 cm

● black	Prod. no.	**1006527**	**35.00 GBP**
○ white	Prod. no.	**1006528**	**35.00 GBP**

T-CONNECTOR, PHASE & DALI, EXTERNAL EARTH LEFT, WITH FEED-IN CAPACITY



16 A max. | 20.3 cm | Polycarbonate (PC)
L: 20.3 cm | W: 13 cm | H: 3.3 cm

● black	Prod. no.	**1006533**	**35.00 GBP**
○ white	Prod. no.	**1006534**	**35.00 GBP**

X-CONNECTOR



16 A max. | 20.3 cm | Polycarbonate (PC)
L: 20.3 cm | W: 20.3 cm | H: 3.3 cm

● black	Prod. no.	**1006535**	**56.00 GBP**
○ white	Prod. no.	**1006536**	**56.00 GBP**

LONGITUDINAL CONNECTOR, PHASE & DALI



16 A max. | 20.3 cm | Polycarbonate (PC)
L: 20.3 cm | W: 5.6 cm | H: 3.3 cm

● black	Prod. no.	**1006537**	**30.00 GBP**
○ white	Prod. no.	**1006538**	**30.00 GBP**

MINI-CONNECTOR, PHASE & DALI



16 A max. | 10.6 cm | Polycarbonate (PC)
L: 10.6 cm | W: 2.5 cm | H: 2.8 cm

● black	Prod. no.	**1002641**	**10.00 GBP**
○ white	Prod. no.	**1002642**	**10.00 GBP**

END CAP FOR 3-PHASE RECESSED TRACK



4.8 cm | Polycarbonate (PC)
L: 4.8 cm | W: 5.6 cm

● black	Prod. no.	**1006539**	**2.00 GBP**
○ white	Prod. no.	**1006540**	**2.00 GBP**

3-PHASE ADAPTER, DALI




16 A max. | 11.3 cm | Polycarbonate (PC)
L: 11.3 cm | W: 5.5 cm | H: 3.3 cm

● black	Prod. no.	**1002660**	**17.00 GBP**
○ white	Prod. no.	**1002659**	**17.00 GBP**



EUTRAC®
3-PHASE, SURFACE MOUNTED TRACK, 2 M



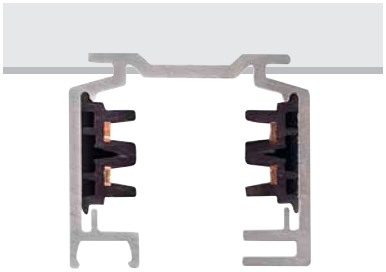


	100 cm	100 cm	100 cm
Nominal voltage (V)	220-250V ~50/60Hz	220-250V ~50/60Hz	220-250V ~50/60Hz
Max. current (A)	16 A max.	16 A max.	16 A max.
Colour	● black	○ white	● grey
Material	Aluminium/plastic	Aluminium/plastic	Aluminium/plastic
L x W x H (cm)	100 cm x 3.6 cm x 3.2 cm	100 cm x 3.6 cm x 3.2 cm	100 cm x 3.6 cm x 3.2 cm
Prod. no.	**145100**	**1001510**	**145102**
GBP	**44.00**	**44.00**	**44.00**


	200 cm	200 cm	200 cm
Nominal voltage (V)	220-250V ~50/60Hz	220-250V ~50/60Hz	220-250V ~50/60Hz
Max. current (A)	16 A max.	16 A max.	16 A max.
Colour	● black	○ white	● grey
Material	Aluminium/plastic	Aluminium/plastic	Aluminium/plastic
L x W x H (cm)	200 cm x 3.6 cm x 3.2 cm	200 cm x 3.6 cm x 3.2 cm	200 cm x 3.6 cm x 3.2 cm
Prod. no.	**145200**	**1001511**	**145202**
GBP	**79.00**	**79.00**	**79.00**


	300 cm	300 cm	300 cm
Nominal voltage (V)	220-250V ~50/60Hz	220-250V ~50/60Hz	220-250V ~50/60Hz
Max. current (A)	16 A max.	16 A max.	16 A max.
Colour	● black	○ white	● grey
Material	Aluminium/plastic	Aluminium/plastic	Aluminium/plastic
L x W x H (cm)	300 cm x 3.6 cm x 3.2 cm	300 cm x 3.6 cm x 3.2 cm	300 cm x 3.6 cm x 3.2 cm
Prod. no.	**145300**	**1001512**	**145302**
GBP	**126.00**	**126.00**	**126.00**

Planning assistance and accessories at a glance

View of components from above on the installation side



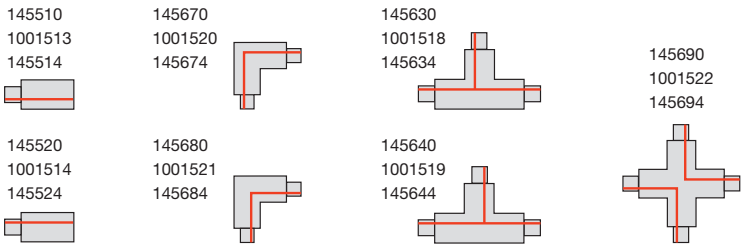

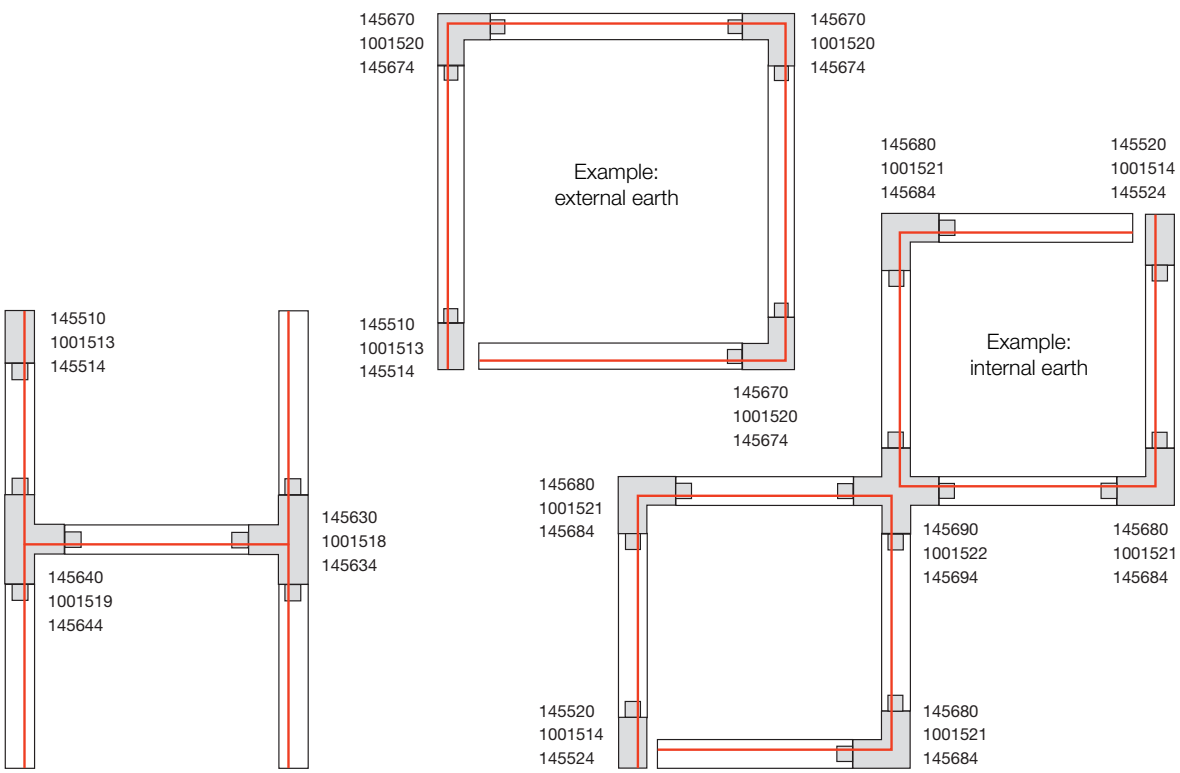



3-PHASE, FEED-IN, EARTH LEFT

16 A max. | 11.2 cm | Plastic
L: 11.2 cm | W: 3.6 cm | H: 3.2 cm
Earth left

● black	Prod. no.	**145510**	**18.00 GBP**
○ white	Prod. no.	**1001513**	**18.00 GBP**
● grey	Prod. no.	**145514**	**18.00 GBP**



3-PHASE, FEED-IN, EARTH RIGHT

16 A max. | 11.2 cm | Plastic
L: 11.2 cm | W: 3.6 cm | H: 3.2 cm
Earth right

● black	Prod. no.	**145520**	**18.00 GBP**
○ white	Prod. no.	**1001514**	**18.00 GBP**
● grey	Prod. no.	**145524**	**18.00 GBP**



3-PHASE, CENTRE FEED-IN

16 A max. | 13 cm | Plastic
L: 13 cm | W: 3.6 cm | H: 3.6 cm

● black	Prod. no.	**145530**	**40.00 GBP**
○ white	Prod. no.	**1001515**	**40.00 GBP**
● grey	Prod. no.	**145534**	**40.00 GBP**



3-PHASE, LONGITUDINAL CONNECTOR WITH FEED-IN CAPACITY

16 A max. | 19.2 cm | Plastic PC
L: 19.2 cm | W: 3.6 cm | H: 3.2 cm
With feed-in capacity

● black	Prod. no.	**145660**	**69.00 GBP**
○ white	Prod. no.	**1001517**	**69.00 GBP**
● grey	Prod. no.	**145664**	**69.00 GBP**



3-PHASE, LONGITUDINAL CONNECTOR

16 A max. | 5.8 cm | Plastic
L: 5.8 cm | W: 1.5 cm | H: 2.6 cm

● black	Prod. no.	**145560**	**18.00 GBP**
○ white	Prod. no.	**1001516**	**18.00 GBP**
● grey	Prod. no.	**145564**	**18.00 GBP**



3-PHASE, L-CONNECTOR, INTERNAL EARTH, WITH FEED-IN CAPACITY

16 A max. | 15 cm | Plastic
L: 15 cm | W: 15 cm | H: 3.2 cm

● black	Prod. no.	**145680**	**58.00 GBP**
○ white	Prod. no.	**1001521**	**58.00 GBP**
● grey	Prod. no.	**145684**	**58.00 GBP**



3-PHASE, L-CONNECTOR, EXTERNAL EARTH, WITH FEED-IN CAPACITY

16 A max. | 15 cm | Plastic
L: 15 cm | W: 15 cm | H: 3.2 cm

Earth external, with feed-in capacity

● black	Prod. no.	**145670**	**58.00 GBP**
○ white	Prod. no.	**1001520**	**58.00 GBP**
● grey	Prod. no.	**145674**	**58.00 GBP**



3-PHASE, T-CONNECTOR, INTERNAL EARTH LEFT

16 A max. | 26 cm | Plastic
L: 26 cm | B: 18.5 cm | H: 3.2 cm

Earth internal, left, with feed-in capacity

● black	Prod. no.	**145630**	**79.00 GBP**
○ white	Prod. no.	**1001518**	**79.00 GBP**
● grey	Prod. no.	**145634**	**79.00 GBP**



3-PHASE, T-CONNECTOR, INTERNAL EARTH RIGHT

16 A max. | 26 cm | Plastic
L: 26 cm | B: 18.5 cm | H: 3.2 cm

Earth internal, right, with feed-in capacity

● black	Prod. no.	**145640**	**79.00 GBP**
○ white	Prod. no.	**1001519**	**79.00 GBP**
● grey	Prod. no.	**145644**	**79.00 GBP**



3-PHASE, X-CONNECTOR, WITH FEED-IN CAPACITY

16 A max. | 26 cm | Plastic
L: 26 cm | W: 26 cm | H: 3.2 cm

Two separate power circuits

● black	Prod. no.	**145690**	**117.00 GBP**
○ white	Prod. no.	**1001522**	**117.00 GBP**
● grey	Prod. no.	**145694**	**117.00 GBP**



3-PHASE, JOINT CONNECTOR

16 A max. | 10 cm | Plastic
L: 10 cm | W: 3.6 cm | H: 1.9 cm

● black	Prod. no.	**145600**	**20.00 GBP**
○ white	Prod. no.	**1001523**	**20.00 GBP**
● grey	Prod. no.	**145604**	**20.00 GBP**



3-PHASE, FLEX CONNECTOR

16 A max. | 30.7 cm | Plastic
L: 30.7 cm | W: 3.6 cm | H: 3.2 cm

● black	Prod. no.	**145580**	**79.00 GBP**
○ white	Prod. no.	**1001524**	**79.00 GBP**
● grey	Prod. no.	**145584**	**79.00 GBP**



3-PHASE, SOCKET

6,3 A max. | 9.6 cm | Plastic
L: 9.6 cm | W: 6.5 cm | H: 9 cm

● black	Prod. no.	**145700**	**83.00 GBP**
○ white	Prod. no.	**1001525**	**83.00 GBP**



3-PHASE, PENDANT LIGHT ADAPTOR

10 A max. | 9.6 cm | Plastic
L: 9.6 cm | W: 3.5 cm | H: 4.5 cm

● black	Prod. no.	**145990**	**18.00 GBP**
○ white	Prod. no.	**1001542**	**18.00 GBP**
● grey	Prod. no.	**145994**	**18.00 GBP**



3-PHASE, PENDANT CLIP

5 cm | Aluminium
L: 5 cm | W: 3.6 cm | H: 1.9 cm

● black	Prod. no.	**145730**	**10.00 GBP**
○ white	Prod. no.	**1001530**	**10.00 GBP**
● grey	Prod. no.	**145734**	**10.00 GBP**



3-PHASE, UNIVERSAL POINT OUTLET

16 A max. | Plastic
H: 3.1 cm

● black	Prod. no.	**145830**	**92.00 GBP**
○ white	Prod. no.	**1001526**	**92.00 GBP**
● grey	Prod. no.	**145834**	**92.00 GBP**



3-PHASE, END CAP

3.6 cm | Plastic
L: 3.6 cm | W: 1.7 cm | H: 3.2 cm

● black	Prod. no.	**145590**	**4.00 GBP**
○ white	Prod. no.	**1001527**	**4.00 GBP**
● grey	Prod. no.	**145594**	**4.00 GBP**



3-PHASE, PENDANT SUSPENSION, RIGID

60 cm | Plastic/Steel
L: 60 cm | H: 63.5 cm

● black	Prod. no.	**145720**	**35.00 GBP**
○ white	Prod. no.	**1001529**	**35.00 GBP**
● grey	Prod. no.	**145724**	**35.00 GBP**

3-PHASE, PENDANT SUSPENSION, RIGID

120 cm | Plastic/Steel
L: 120 cm | H: 122 cm

● black	Prod. no.	**145710**	**40.00 GBP**
○ white	Prod. no.	**1001528**	**40.00 GBP**
● grey	Prod. no.	**145714**	**40.00 GBP**




EUTRACK®, S-TRACK AND 1-PHASE TRACKS, 5 M, SET OF TWO

500 cm | Stainless steel/Brass
L: 500 cm

● nickel	Prod. no.	**1002845**	**37.00 GBP**

EUTRAC®
3-PHASE, RECESSED TRACK, 3 M



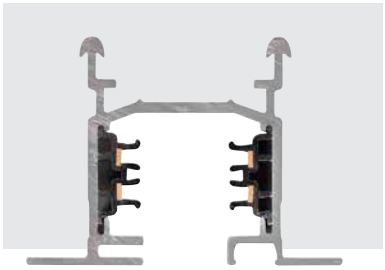

	200 cm	300 cm
Nominal voltage (V)	220-250V ~50/60Hz	220-250V ~50/60Hz
Max. current (A)	16 A max.	16 A max.
Colour	○ white	○ white
Material	Aluminium/plastic	Aluminium/plastic
L x W x H (cm)	200 cm x 5.9 cm x 4.1 cm	300 cm x 5.9 cm x 4.1 cm
Prod. no.	**1001531**	**1001532**
GBP	**109.00**	**176.00**



3-PHASE, FEED-IN, EARTH LEFT

16 A max. | 12.2 cm | Plastic/Steel
L: 12.2 cm | W: 6 cm | H: 3.4 cm

○ white Prod. no. **1001533** **29.00 GBP**



3-PHASE, FEED-IN, EARTH RIGHT

16 A max. | 12.2 cm | Plastic/Steel
L: 12.2 cm | W: 6 cm | H: 3.4 cm

○ white Prod. no. **1001534** **29.00 GBP**



3-PHASE, L-CONNECTOR

16 A max. | 16 cm | Plastic/Steel
L: 16 cm | W: 16 cm | H: 3.2 cm
Earth external, with feed-in capacity

○ white Prod. no. **1001536** **69.00 GBP**



3-PHASE, L-CONNECTOR

16 A max. | 16 cm | Plastic/Steel
L: 16 cm | W: 16 cm | H: 3.2 cm
Earth internal, with feed-in capacity

○ white Prod. no. **1001537** **69.00 GBP**



3-PHASE, END CAP

2.7 cm | Plastic
L: 2.7 cm | B: 6 cm | H: 3.2 cm

○ white Prod. no. **1001538** **7.00 GBP**



3-PHASE, LONGITUDINAL CONNECTOR

16 A max. | 6.2 cm | Plastic/Steel
L: 6.2 cm | W: 2.5 cm | H: 2.7 cm

○ white Prod. no. **1001539** **25.00 GBP**



3-PHASE, MOUNTING SPRING CLIP

2 cm | Steel
L: 2 cm | W: 1 cm | H: 2.5 cm

● grey Prod. no. **145551** **12.00 GBP**



3-PHASE LIGHT ADAPTER


10 A max. | 9.6 cm | Plastic
L: 9.6 cm | W: 3.5 cm | H: 4.5 cm

○ white Prod. no. **1001542** **18.00 GBP**


1011688 555

HAVEN 25
3-PHASE, E27





IP20 200 cm

220-240 V ~50/60 Hz
Material: Steel

SOCKET INSIDE 40 W

Base: 1xE27

Variant	Prod. no.	GBP
● black	1011687	222.00
○ white	1011688	222.00
● gold	1011689	231.00

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F


C

Prod. no.: **1005303** **9.00 GBP**


1008268 557

PURI 2.0 TUBE
3-PHASE, QPAR51





IP20 IK02 350° 90°

220-240 V ~50/60 Hz
Material: Aluminium

SOCKET INSIDE 6 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.	GBP
● black	**1008266**	**35.00**
◐ black/gold	**1008267**	**35.00**
○ white	**1008268**	**35.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no.: **1005077** **7.00 GBP**


SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: **1012469** **23.00 GBP**

PURI 2.0 CONE
3-PHASE, QPAR51





IP20 IK02 350° 90°

220-240 V ~50/60 Hz
Material: Aluminium

SOCKET INSIDE 6 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.	GBP
● black	**1008269**	**35.00**
◐ black/gold	**1008270**	**35.00**
○ white	**1008271**	**35.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no.: **1005077** **7.00 GBP**


SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: **1012469** **23.00 GBP**

PURI 2.0 DOME
3-PHASE, QPAR51





IP20 IK02 350° 90°

220-240 V ~50/60 Hz
Material: Aluminium

SOCKET INSIDE 6 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.	GBP
● black	**1008272**	**35.00**
◐ black/gold	**1008273**	**35.00**
○ white	**1008274**	**35.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no.: **1005077** **7.00 GBP**


SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: **1012469** **23.00 GBP**


1008282 559

PURI 2.0 TUBE
3-PHASE, PD, QPAR51

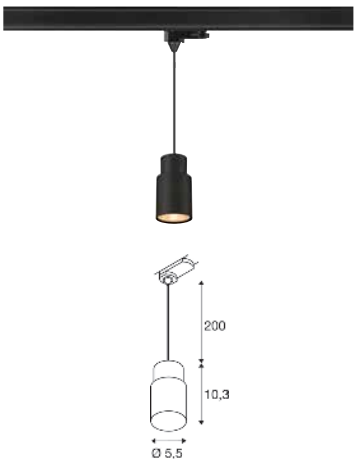

IP20 IK02 200 cm

220-240 V ~50/60 Hz
Material: Aluminium

SOCKET INSIDE 6 W

Base: 1xGU10 max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.	GBP
● black	1008275	39.00
◐ black/gold	1008276	39.00
○ white	1008277	39.00

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F


Prod. no.: 1005077 **7.00 GBP**

SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: 1012469 **23.00 GBP**

PURI 2.0 CONE
3-PHASE, PD, QPAR51

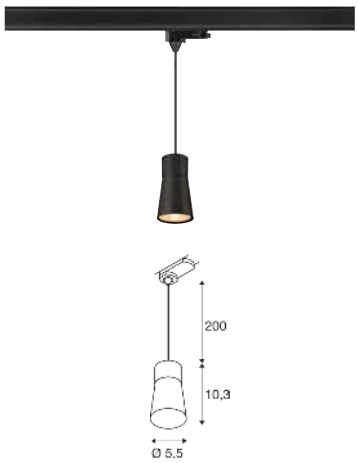

IP20 IK02 200 cm

220-240 V ~50/60 Hz
Material: Aluminium

SOCKET INSIDE 6 W

Base: 1xGU10 max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.	GBP
● black	1008278	39.00
◐ black/gold	1008279	39.00
○ white	1008280	39.00

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F


Prod. no.: 1005077 **7.00 GBP**

SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: 1012469 **23.00 GBP**

PURI 2.0 DOME
3-PHASE, PD, QPAR51

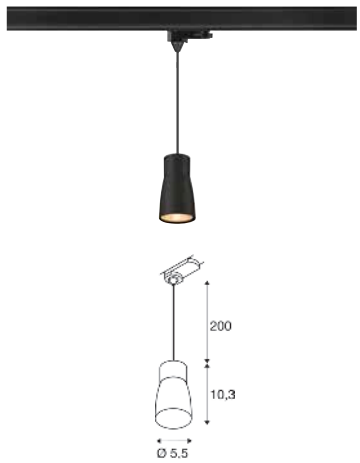

IP20 IK02 200 cm

220-240 V ~50/60 Hz
Material: Aluminium

SOCKET INSIDE 6 W

Base: 1xGU10 max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.	GBP
● black	1008281	39.00
◐ black/gold	1008282	39.00
○ white	1008283	39.00

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no.: 1005077 **7.00 GBP**

SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: 1012469 **23.00 GBP**


1008271 + 1008219
557 + 561

PURI 2.0 TUBE
SHADE



Ø: 5.5 cm
H: 6.5 cm
Material: Aluminium

Variant	Prod. no.	GBP
black	1008214	8.00
white	1008213	8.00
gold	1008216	8.00
grey	1008215	8.00
bronze	1008217	8.00
aluminium	1008376	8.00

PURI 2.0 CONE
SHADE



Ø: 5.5 cm
H: 6.5 cm
Material: Aluminium

Variant	Prod. no.	GBP
black	1008219	8.00
white	1008218	8.00
gold	1008221	8.00
grey	1008220	8.00
bronze	1008222	8.00
aluminium	1008377	8.00

PURI 2.0 DOME
SHADE




Ø: 5.5 cm
H: 6.5 cm
Material: Aluminium

Variant	Prod. no.	GBP
black	1008224	8.00
white	1008223	8.00
gold	1008226	8.00
grey	1008225	8.00
bronze	1008227	8.00
aluminium	1008378	8.00



BIMA 2.0
3-PHASE, SINGLE, QPAR51





IP20 IK02 330° 180°

220-240 V ~50/60 Hz
Material: Aluminium/Plastic

SOCKET INSIDE 10 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.4 cm

Variant	Prod. no.	GBP
● black	**1011763**	**42.00**
○ white	**1011764**	**42.00**

GU10 | 6 W | 38°
470 lm | 3000 K | EEC = F

C,L

Prod. no.: 1005079 7.00 GBP

SMART


GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: 1012469 23.00 GBP

Product	Prod. no.	GBP
ENOLA® 2.0/BIMA 2.0 M, Decorative Ring		
● black	**1011749**	**4.00**
○ white	**1011750**	**4.00**
● gold	**1011751**	**4.00**
● copper	**1011752**	**4.00**

BIMA 2.0
3-PHASE, DOUBLE, QPAR51





IP20 IK02 330° 180°

220-240 V ~50/60 Hz
Material: Aluminium/Plastic

SOCKET INSIDE 10 W

Base: 2xGU10 | max. Ø: 5.1 cm | L: 5.4 cm

Variant	Prod. no.	GBP
● black	**1011765**	**68.00**
○ white	**1011766**	**68.00**

GU10 | 6 W | 38°
470 lm | 3000 K | EEC = F

C,L

Prod. no.: 1005079 7.00 GBP

SMART


GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: 1012469 23.00 GBP

Product	Prod. no.	GBP
ENOLA® 2.0/BIMA 2.0 M, Decorative Ring		
● black	**1011749**	**4.00**
○ white	**1011750**	**4.00**
● gold	**1011751**	**4.00**
● copper	**1011752**	**4.00**

ENOLA® 2.0 S
3-PHASE, SINGLE,
GU10 MINI, PAR11





IP20 IK02 330° 90°

220-240 V ~50/60 Hz
Material: Aluminium/Plastic PC

SOCKET INSIDE 5 W

Base: 1xGU10 | max. Ø: 3.6 cm | L: 4.6 cm

Variant	Prod. no.	GBP
● black	1011721	48.00
○ white	1011722	48.00

GU10 | 5 W | 36°
390 lm | 2700 K | EEC = F


C,L

Prod. no.: 1011670 10.00 GBP

Product	Prod. no.	GBP
ENOLA® 2.0 S, Decorative Ring		
● black	1011753	4.00
○ white	1011754	4.00
gold	1011755	4.00
copper	1011756	4.00

ENOLA® 2.0 S
3-PHASE, PD, SINGLE,
GU10 MINI, PAR11





IP20 IK02 200 cm

220-240 V ~50/60 Hz
Material: Aluminium/Plastic PC

SOCKET INSIDE 5 W

Base: 1xGU10 | max. Ø: 3.6 cm | L: 4.6 cm

Variant	Prod. no.	GBP
● black	1011725	60.00
○ white	1011726	60.00

GU10 | 5 W | 36°
390 lm | 2700 K | EEC = F

C,L

Prod. no.: 1011670 10.00 GBP

Product	Prod. no.	GBP
ENOLA® 2.0 S, Decorative Ring		
● black	1011753	4.00
○ white	1011754	4.00
gold	1011755	4.00
copper	1011756	4.00

ENOLA® 2.0 S
DECORATIVE RING




Ø: 3.9 cm
H: 1.1 cm
Material: Plastic PC

Variant	Prod. no.	GBP
● black	1011753	4.00
○ white	1011754	4.00
gold	1011755	4.00
copper	1011756	4.00

ENOLA® 2.0 M
3-PHASE, SINGLE, GU10, QPAR51





IP20 IK02 330° 90°

220-240 V ~50/60 Hz
Material: Aluminium/Plastic PC

SOCKET INSIDE 10 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 6 cm

Variant	Prod. no.	GBP
● black	1011711	52.00
○ white	1011712	52.00

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

C,L

Prod. no.: 1005076 7.00 GBP

SMART


GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: 1012469 23.00 GBP

Product	Prod. no.	GBP
ENOLA® 2.0/BIMA 2.0 M, Decorative Ring		
● black	1011749	4.00
○ white	1011750	4.00
● gold	1011751	4.00
● copper	1011752	4.00

ENOLA® 2.0 M
3-PHASE, PD, SINGLE, GU10, QPAR51





IP20 IK02 200 cm

220-240 V ~50/60 Hz
Material: Aluminium/Plastic PC

SOCKET INSIDE 10 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 6 cm

Variant	Prod. no.	GBP
● black	1011715	68.00
○ white	1011716	68.00

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

C,L

Prod. no.: 1005076 7.00 GBP

SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: 1012469 23.00 GBP

Product	Prod. no.	GBP
ENOLA® 2.0/BIMA 2.0 M, Decorative Ring		
● black	1011749	4.00
○ white	1011750	4.00
● gold	1011751	4.00
● copper	1011752	4.00

ENOLA® 2.0/BIMA 2.0 M
DECORATIVE RING




Ø: 5.4 cm
H: 2 cm
Material: Plastic PC

Variant	Prod. no.	GBP
● black	1011749	4.00
○ white	1011750	4.00
● gold	1011751	4.00
● copper	1011752	4.00

GRIP! M
3-PHASE, DALI, Ø 4,3 CM





Dali Touch IP20 IK02 42° 330° 90° 50 000 h L80B10 UGR 19

220-240 V ~50/60 Hz | 350 mA
Total wattage: 15 W
Material: Aluminium

- Honeycomb accessories included

LED INSIDE CRI 90


1008437 **1008438**	Down	3000 K 1540 lm	
1008435 **1008436**	Down	2700 K 1450 lm	

Variant	Prod. no.	GBP
black/gold 1450 lm | 2700 K	**1008436**	**155.00**
black/gold 1540 lm | 3000 K	**1008438**	**155.00**
white/black 1450 lm | 2700 K	**1008435**	**155.00**
white/black 1540 lm | 3000 K	**1008437**	**155.00**

Product	Prod. no.	GBP
GRIP! M, decorative ring		
white	**1011833**	**18.00**
black	**1011834**	**18.00**
Nickel	**1011835**	**18.00**
gold	**1011836**	**18.00**
Honeycomb		
black	**1011838**	**10.00**

GRIP! M
3-PHASE, DALI, Ø 4,3 CM





Dali Touch IP20 IK02 42° 330° 90° 50 000 h L80B20 UGR 19

220-240 V ~50/60 Hz | 350 mA
Total wattage: 15 W
Material: Aluminium

- Honeycomb accessories included

LED INSIDE DIM TO WARM CRI 90


Down		2000 K - 3000 K 1000 lm	

Variant	Prod. no.	GBP
black/gold	**1008440**	**155.00**
white/black	**1008439**	**155.00**

Product	Prod. no.	GBP
GRIP! M, decorative ring		
white	**1011833**	**18.00**
black	**1011834**	**18.00**
Nickel	**1011835**	**18.00**
gold	**1011836**	**18.00**
Honeycomb		
black	**1011838**	**10.00**

GRIP! M
3-PHASE, PHASE, Ø 4,3 CM





C | IP20 | IK02 | 42° | 330° | 90° | 50 000 h L80B10 | UGR 19

220-240 V ~50/60 Hz | 350 mA
Total wattage: 15 W
Material: Aluminium

- Honeycomb accessories included

LED INSIDE | CRI 90

1008443 **1008444**	Down	3000 K 1540 lm	
1008441 **1008442**	Down	2700 K 1450 lm	


Variant	Prod. no.	GBP
black/gold 1450 lm | 2700 K	**1008442**	**155.00**
black/gold 1540 lm | 3000 K	**1008444**	**155.00**
white/black 1450 lm | 2700 K	**1008441**	**155.00**
white/black 1540 lm | 3000 K	**1008443**	**155.00**

⊕

Product	Prod. no.	GBP
GRIP! M, decorative ring		
white	**1011833**	**18.00**
black	**1011834**	**18.00**
Nickel	**1011835**	**18.00**
gold	**1011836**	**18.00**
Honeycomb		
black	**1011838**	**10.00**

GRIP! M
3-PHASE, PHASE, Ø 4,3 CM





C | IP20 | IK02 | 42° | 330° | 90° | 50 000 h L80B20 | UGR 19

220-240 V ~50/60 Hz | 350 mA
Total wattage: 15 W
Material: Aluminium

- Honeycomb accessories included

LED INSIDE | DIM TO WARM | CRI 90

	Down	2000 K - 3000 K 1000 lm	

Variant	Prod. no.	GBP
black/gold	**1008446**	**155.00**
white/black	**1008445**	**155.00**

⊕

Product	Prod. no.	GBP
GRIP! M, decorative ring		
white	**1011833**	**18.00**
black	**1011834**	**18.00**
Nickel	**1011835**	**18.00**
gold	**1011836**	**18.00**
Honeycomb		
black	**1011838**	**10.00**

GRIP! M
DECORATIVE RING



NEW

Ø: 4 cm
H: 1.4 cm
Material: Aluminium

- Front panel with spacer
- No honeycomb insert included

Variant	Prod. no.	GBP
black	**1011834**	**18.00**
white	**1011833**	**18.00**
gold	**1011836**	**18.00**
Nickel	**1011835**	**18.00**


⊕

Product	Prod. no.	GBP
Honeycomb		
black	**1011838**	**10.00**


1008452 569

GRIP! L
3-PHASE, QPAR51, Ø 5,7 CM





IP20 IK02 330° 90°

220-240 V ~50/60 Hz
Material: Aluminium

- Honeycomb accessories included

SOCKET INSIDE 6 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.	GBP
black/gold	1008453	77.00
white/black	1008452	77.00

GU10 | 6 W | 38°
470 lm | 3000 K | EEC = F

Prod. no.: 1005080 7.00 GBP

SMART


GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: 1012469 23.00 GBP

GRIP! L
3-PHASE, PD, QPAR51, Ø 5,7 CM

NEW





IP20 IK02 200 cm

220-240 V ~50/60 Hz
Material: Aluminium

- Honeycomb accessories included

SOCKET INSIDE 6 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.	GBP
black/gold	1011710	121.00
white/black	1011709	121.00

GU10 | 6 W | 38°
470 lm | 3000 K | EEC = F

Prod. no.: 1005080 7.00 GBP

SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: 1012469 23.00 GBP

GRIP! L
DECORATIVE RING



Ø: 5.4 cm
H: 2.1 cm
Material: Aluminium

Variant	Prod. no.	GBP
black	1008497	21.00
white	1008496	21.00
gold	1008499	21.00
Nickel	1008498	21.00


Product	Prod. no.	GBP
Honeycomb		
black	1011839	11.00



1006119 581


S-WORKS
S-WORKS

NUMINOS® S
3-PHASE








● black

IP20 350° 90° 50000 h L90B10 LED INSIDE

CRI 90

220-240 V ~50/60 Hz | 200 mA
Total wattage: 8 W
Material: Aluminium



○ white

Variant	GBP
All S versions	**100.00**
All S versions DALI	**142.00**

Note:
Decorative ring also available in white, gold and copper




⊕


Product	Prod. no.	GBP
Front ring S		
○ white	**1006167**	**2.00**
● copper	**1008140**	**8.00**
● gold	**1008144**	**8.00**

					Prod. no.	
C	2700 K	950 lm	24°	16	**1004074**	
			36°	16	**1004075**	
			60°	19	**1004076**	
	3000 K	1050 lm	24°	16	**1004082**	
			36°	16	**1004083**	
			60°	19	**1004084**	
	4000 K	1100 lm	24°	16	**1004090**	
			36°	16	**1004091**	
			60°	19	**1004092**	
Dali Touch	2700 K	950 lm	24°	16	**1004362**	
			36°	16	**1004363**	
			60°	19	**1004364**	
	3000 K	1050 lm	24°	16	**1004370**	
			36°	16	**1004371**	
			60°	19	**1004372**	
	4000 K	1100 lm	24°	16	**1004378**	
			36°	16	**1004379**	
			60°	19	**1004380**	
C	2700 K	950 lm	24°	16	**1004078**	
			36°	16	**1004079**	
			60°	19	**1004080**	
	3000 K	1050 lm	24°	16	**1004086**	
			36°	16	**1004087**	
			60°	19	**1004088**	
	4000 K	1100 lm	24°	16	**1004094**	
			36°	16	**1004095**	
			60°	19	**1004096**	
Dali Touch	2700 K	950 lm	24°	16	**1004366**	
			36°	16	**1004367**	
			60°	19	**1004368**	
	3000 K	1050 lm	24°	16	**1004374**	
			36°	16	**1004375**	
			60°	19	**1004376**	
	4000 K	1100 lm	24°	16	**1004382**	
			36°	16	**1004383**	
			60°	19	**1004384**	

NUMINOS® M
3-PHASE








● black

IP20 350° 90° 50000 h L90B10 LED INSIDE

CRI 90

220-240 V ~50/60 Hz | 350 mA
Total wattage: 14 W
Material: Aluminium



○ white

Variant	GBP
All M versions	**126.00**
All M versions DALI	**172.00**

Note:
Decorative ring also available in white, gold and copper





Product	Prod. no.	GBP
Front ring M		
○ white	**1006168**	**3.00**
● copper	**1008141**	**8.00**
● gold	**1008145**	**8.00**

					Prod. no.	
C	2700 K	1750 lm	24°	16	**1004170**	
			36°	16	**1004171**	
			60°	22	**1004172**	
	3000 K	1800 lm	24°	16	**1004178**	
			36°	16	**1004179**	
			60°	22	**1004180**	
	4000 K	1950 lm	24°	16	**1004186**	
			36°	16	**1004187**	
			60°	22	**1004188**	
Dali Touch	2700 K	1750 lm	24°	16	**1004458**	
			36°	16	**1004459**	
			60°	22	**1004460**	
	3000 K	1800 lm	24°	16	**1004466**	
			36°	16	**1004467**	
			60°	22	**1004468**	
	4000 K	1950 lm	24°	16	**1004474**	
			36°	16	**1004475**	
			60°	22	**1004476**	
C	2700 K	1750 lm	24°	16	**1004174**	
			36°	16	**1004175**	
			60°	22	**1004176**	
	3000 K	1800 lm	24°	16	**1004182**	
			36°	16	**1004183**	
			60°	22	**1004184**	
	4000 K	1950 lm	24°	16	**1004190**	
			36°	16	**1004191**	
			60°	22	**1004192**	
Dali Touch	2700 K	1750 lm	24°	16	**1004462**	
			36°	16	**1004463**	
			60°	22	**1004464**	
	3000 K	1800 lm	24°	16	**1004470**	
			36°	16	**1004471**	
			60°	22	**1004472**	
	4000 K	1950 lm	24°	16	**1004478**	
			36°	16	**1004479**	
			60°	22	**1004480**	

NUMINOS® L
3-PHASE








● black

IP20 350° 90° 50000h L90B10 LED INSIDE

CRI 90

220-240 V ~50/60 Hz | 500 mA
Total wattage: 20 W
Material: Aluminium



○ white

Variant	GBP
All L versions	**134.00**
All L versions DALI	**184.00**

Note:
Decorative ring also available in white, gold and copper





Product	Prod. no.	GBP
Front ring L		
○ white	**1006169**	**3.00**
● copper	**1008142**	**10.00**
● gold	**1008146**	**10.00**

					Prod. no.	
C	2700 K	2300 lm	24°	16	**1004266**	
			36°	16	**1004267**	
			60°	19	**1004268**	
	3000 K	2400 lm	24°	16	**1004274**	
			36°	16	**1004275**	
			60°	19	**1004276**	
	4000 K	2600 lm	24°	16	**1004282**	
			36°	16	**1004283**	
			60°	19	**1004284**	
Dali Touch	2700 K	2300 lm	24°	16	**1004554**	
			36°	16	**1004555**	
			60°	19	**1004556**	
	3000 K	2400 lm	24°	16	**1004562**	
			36°	16	**1004563**	
			60°	19	**1004564**	
	4000 K	2600 lm	24°	16	**1004570**	
			36°	16	**1004571**	
			60°	19	**1004572**	
C	2700 K	2300 lm	24°	16	**1004270**	
			36°	16	**1004271**	
			60°	19	**1004272**	
	3000 K	2400 lm	24°	16	**1004278**	
			36°	16	**1004279**	
			60°	19	**1004280**	
	4000 K	2600 lm	24°	16	**1004286**	
			36°	16	**1004287**	
			60°	19	**1004288**	
Dali Touch	2700 K	2300 lm	24°	16	**1004558**	
			36°	16	**1004559**	
			60°	19	**1004560**	
	3000 K	2400 lm	24°	16	**1004566**	
			36°	16	**1004567**	
			60°	19	**1004568**	
	4000 K	2600 lm	24°	16	**1004574**	
			36°	16	**1004575**	
			60°	19	**1004576**	

NUMINOS® XL
3-PHASE








● black

IP20 350° 90° 50000 h L90B10 LED INSIDE

CRI 90

220-240 V ~50/60 Hz | 700 mA
Total wattage: 28 W
Material: Aluminium



○ white

Variant	GBP
All XL versions	**142.00**
All XL versions DALI	**201.00**

Note:
Decorative ring also available in white, gold and copper




Product	Prod. no.	GBP
Front ring XL		
○ white	**1006170**	**4.00**
● copper	**1008143**	**10.00**
● gold	**1008147**	**10.00**

					Prod. no.	
C	2700 K	3550 lm	24°	16	**1005723**	
			36°	16	**1005724**	
		3150 lm	60°	22	**1005725**	
	3000 K	3550 lm	24°	16	**1005729**	
			36°	16	**1005730**	
		3150 lm	60°	22	**1005731**	
	4000 K	3900 lm	24°	16	**1005735**	
			36°	16	**1005736**	
		3500 lm	60°	22	**1005737**	
Dali Touch	2700 K	3550 lm	24°	16	**1005795**	
			36°	16	**1005796**	
		3150 lm	60°	22	**1005797**	
	3000 K	3550 lm	24°	16	**1005801**	
			36°	16	**1005802**	
		3150 lm	60°	22	**1005803**	
	4000 K	3900 lm	24°	16	**1005807**	
			36°	16	**1005808**	
		3500 lm	60°	22	**1005809**	
C	2700 K	3550 lm	24°	16	**1005726**	
			36°	16	**1005727**	
		3150 lm	60°	22	**1005728**	
	3000 K	3550 lm	24°	16	**1005732**	
			36°	16	**1005733**	
		3150 lm	60°	22	**1005734**	
	4000 K	3900 lm	24°	16	**1005738**	
			36°	16	**1005739**	
		3500 lm	60°	22	**1005740**	
Dali Touch	2700 K	3550 lm	24°	16	**1005798**	
			36°	16	**1005799**	
		3150 lm	60°	22	**1005800**	
	3000 K	3550 lm	24°	16	**1005804**	
			36°	16	**1005805**	
		3150 lm	60°	22	**1005806**	
	4000 K	3900 lm	24°	16	**1005810**	
			36°	16	**1005811**	
		3500 lm	60°	22	**1005812**	

NUMINOS® ZOOM M
3-PHASE








220-240 V ~50/60 Hz | 500 mA
Total wattage: 20 W
Material: Aluminium/Polycarbonate (PC)

Variant	GBP
All M versions	**159.00**
All M versions DALI	**201.00**



● black



○ white


					Prod. no.	
C	2700 K	680 lm	15° – 60°	25	**1006108**	
	3000 K	750 lm		25	**1006110**	
	4000 K	780 lm		25	**1006112**	
Dali	2700 K	680 lm	15°– 60°	25	**1006114**	
	3000 K	750 lm		25	**1006116**	
	4000 K	780 lm		25	**1006118**	
C	2700 K	680 lm	15°– 60°	25	**1006109**	
	3000 K	750 lm		25	**1006111**	
	4000 K	780 lm		25	**1006113**	
Dali	2700 K	680 lm	15°– 60°	25	**1006115**	
	3000 K	750 lm		25	**1006117**	
	4000 K	780 lm		25	**1006119**	


1007654 583

UNIVERSAL TRACKSPOT

3-PHASE M,12/16/20/24W 927/930/940 24°...60°





IP20 IK02 24°-60° 350° 90° 50 000 h L80B50

220-240 V ~50/60 Hz | 300 / 400 / 500 / 600 mA
Total wattage: 12 / 16 / 20 / 24 W
Material: Aluminium/Plastic PC

- Variable beam angle 24°-60°

LED INSIDE CCT CRI 90


	2700 K	3000 K	4000 K
1007655	2000 lm	2200 lm	2150 lm
1007654	2000 lm	2200 lm	2150 lm

Variant	Prod. no.	GBP
● black	**1007655**	**137.00**
○ white	**1007654**	**137.00**

UNIVERSAL TRACKSPOT

3-PHASE L,24/28/32/36W 927/930/940 24°...60°





IP20 IK02 24°-60° 350° 90° 50 000 h L80B50

220-240 V ~50/60 Hz | 600 / 700 / 800 / 900 mA
Total wattage: 24 / 28 / 32 / 36 W
Material: Aluminium/Plastic PC

- Variable beam angle 24°-60°

LED INSIDE CCT CRI 90


	2700 K	3000 K	4000 K
1007657	2900 lm	3300 lm	3200 lm
1007656	2900 lm	3300 lm	3200 lm

Variant	Prod. no.	GBP
● black	**1007656**	**154.00**
○ white	**1007657**	**154.00**


1007646 585

NOBLO® SPOT
3-PHASE, PHASE





IP20 | 32° | 355° | 90° | 50 000 h L80B10

220-240 V ~50/60 Hz | 150 mA
Total wattage: 6 W
Material: Aluminium/Polycarbonate (PC)

LED INSIDE | CRI 90

1007648 **1007649**	4000 K 760 lm
1007646 **1007647**	3000 K 750 lm
1007644 **1007645**	2700 K 740 lm


Variant	Prod. no.	GBP
● black 740 lm | 2700 K	**1007644**	**65.00**
● black 750 lm | 3000 K	**1007646**	**65.00**
● black 760 lm | 4000 K	**1007648**	**65.00**
○ white 740 lm | 2700 K	**1007645**	**65.00**
○ white 750 lm | 3000 K	**1007647**	**65.00**
○ white 760 lm | 4000 K	**1007649**	**65.00**

⊕

Product	Prod. no.	GBP
Decorative ring		
● black	**1008482**	**6.00**
○ white	**1008483**	**6.00**
● gold	**1008484**	**6.00**
● grey	**1008485**	**6.00**
● bronze	**1008486**	**6.00**
● copper	**1008487**	**6.00**

NOBLO® SPOT
3-PHASE, PHASE





IP20 | 36° | 355° | 90° | 39 000 h L70B50

220-240 V ~50/60 Hz | 350 mA
Total wattage: 8.4 W
Material: Aluminium/Polycarbonate (PC)

LED INSIDE | DIM TO WARM | CRI 90

2000 K - 3000 K
30 lm - 450 lm


Variant	Prod. no.	GBP
● black	**1007355**	**78.00**
○ white	**1007356**	**78.00**

⊕

Product	Prod. no.	GBP
Decorative ring		
● black	**1008482**	**6.00**
○ white	**1008483**	**6.00**
● gold	**1008484**	**6.00**
● grey	**1008485**	**6.00**
● bronze	**1008486**	**6.00**
● copper	**1008487**	**6.00**

EURO CUBE 2 M
3-PHASE, PHASE





C · IP20 · IK02 · 40° · 335° · 90° · 50 000 h L90B10 · UGR 22

220-240 V ~50/60 Hz | 350 mA
Total wattage: 14 W
Material: Aluminium/Plastic PC

LED INSIDE · CRI 90

1010840 **1010842**	Direct	3000 K 1650 lm	
1010841 **1010843**	Direct	4000 K 1700 lm	


Variant	Prod. no.	GBP
● black 1650 lm | 3000 K	**1010842**	**147.00**
● black 1700 lm | 4000 K	**1010843**	**147.00**
◑ white/black 1650 lm | 3000 K	**1010840**	**147.00**
◑ white/black 1700 lm | 4000 K	**1010841**	**147.00**

⊕

Product	Prod. no.	GBP
Honeycomb		
● black	**1010856**	**13.00**
Oval filter		
○ white	**1010857**	**17.00**

EURO CUBE 2 M
3-PHASE, DALI





Dali · IP20 · IK02 · 40° · 335° · 90° · 50 000 h L90B10 · UGR 22

220-240 V ~50/60 Hz | 350 mA
Total wattage: 14 W
Material: Aluminium/Plastic PC

LED INSIDE · CRI 90

1010845 **1010847**	Direct	4000 K 1700 lm	
1010844 **1010846**	Direct	3000 K 1650 lm	

Variant	Prod. no.	GBP
● black 1650 lm | 3000 K	**1010846**	**172.00**
● black 1700 lm | 4000 K	**1010847**	**172.00**
◑ white/black 1650 lm | 3000 K	**1010844**	**172.00**
◑ white/black 1700 lm | 4000 K	**1010845**	**172.00**

⊕

Product	Prod. no.	GBP
Honeycomb		
● black	**1010856**	**13.00**
Oval filter		
○ white	**1010857**	**17.00**

EURO CUBE 2 M
HONEYCOMB



Ø: 8.9 cm
H: 2.6 cm

Variant	Prod. no.	GBP
● black	**1010856**	**13.00**

EURO CUBE 2 M
OVAL FILTER




Ø: 8.9 cm
H: 2.6 cm

Variant	Prod. no.	GBP
○ white	**1010857**	**17.00**

EURO CUBE 2 L
3-PHASE, PHASE





C · IP20 · IK02 · 40° · 335° · 90° · 50 000 h L90B10 · UGR 19

220-240 V ~50/60 Hz | 550 mA
Total wattage: 21 W
Material: Aluminium/Plastic PC

LED INSIDE · CRI 90

1010849 **1010851**	Down	4000 K 2800 lm	
1010848 **1010850**	Down	3000 K 2750 lm	


Variant	Prod. no.	GBP
● black 2750 lm | 3000 K	**1010850**	**163.00**
● black 2800 lm | 4000 K	**1010851**	**163.00**
◑ white/black 2750 lm | 3000 K	**1010848**	**163.00**
◑ white/black 2800 lm | 4000 K	**1010849**	**163.00**

⊕

Product	Prod. no.	GBP
Honeycomb		
● black	**1010858**	**17.00**
Oval filter		
○ white	**1010859**	**21.00**

EURO CUBE 2 L
3-PHASE, DALI





Dali · IP20 · IK02 · 40° · 335° · 90° · 50 000 h L90B10 · UGR 19

220-240 V ~50/60 Hz | 550 mA
Total wattage: 21 W
Material: Aluminium/Plastic PC

LED INSIDE · CRI 90

1010853 **1010855**	Direct	4000 K 2800 lm	
1010852 **1010854**	Direct	3000 K 2750 lm	

Variant	Prod. no.	GBP
● black 2750 lm | 3000 K	**1010854**	**189.00**
● black 2800 lm | 4000 K	**1010855**	**189.00**
◑ white/black 2750 lm | 3000 K	**1010852**	**189.00**
◑ white/black 2800 lm | 4000 K	**1010853**	**189.00**

⊕

Product	Prod. no.	GBP
Honeycomb		
● black	**1010858**	**17.00**
Oval filter		
○ white	**1010859**	**21.00**

EURO CUBE 2 L
HONEYCOMB



Ø: 10.6 cm
H: 3 cm

Variant	Prod. no.	GBP
● black	**1010858**	**17.00**

EURO CUBE 2 L
OVAL FILTER




Ø: 10.6 cm
H: 3 cm

Variant	Prod. no.	GBP
○ white	**1010859**	**21.00**


1010246 589
MACHU
SPORTS

KALU 2.0
3-PHASE, PHASE





C · IP20 · IK02 · 36° · 330° · 90° · 50000 h L90B10 · UGR 22

220-240 V ~50/60 Hz | 250 mA
Total wattage: 10 W
Material: Aluminium

- Discover more lenses and decorative rings in the accessories section

LED INSIDE · CRI 90

1010246 **1010248**	Down	4000 K 1500 lm	
1010240 **1010242**	Down	3000 K 1450 lm	
1010234 **1010236**	Down	2700 K 1400 lm	


Variant	Prod. no.	GBP
● black 1400 lm | 2700 K	**1010234**	**110.00**
● black 1450 lm | 3000 K	**1010240**	**110.00**
● black 1500 lm | 4000 K	**1010246**	**110.00**
○ white 1400 lm | 2700 K	**1010236**	**110.00**
○ white 1450 lm | 3000 K	**1010242**	**110.00**
○ white 1500 lm | 4000 K	**1010248**	**110.00**

⊕

Product	Prod. no.	GBP
KALU 2.0, decorative ring		
○ white	**1010135**	**8.00**
● black	**1010136**	**8.00**
● gold	**1010138**	**8.00**
● copper	**1010139**	**8.00**
KALU 2.0, lens		
○ transparent | 15°	**1010140**	**17.00**
○ transparent | 24°	**1010141**	**17.00**
○ transparent | 36°	**1010142**	**17.00**
○ transparent | 60°	**1010143**	**17.00**

KALU 2.0
3-PHASE, DALI





Dali · IP20 · IK02 · 36° · 350° · 90° · 50000 h L90B10 · UGR 22

220-240 V ~50/60 Hz | 250 mA
Total wattage: 10 W
Material: Aluminium

- Discover more lenses and decorative rings in the accessories section
- Intrack LED driver adapter

LED INSIDE · CRI 90

1010249 **1010251**	Down	4000 K 1500 lm	
1010243 **1010245**	Down	3000 K 1450 lm	
1010237 **1010239**	Down	2700 K 1400 lm	


Variant	Prod. no.	GBP
● black 1400 lm | 2700 K	**1010237**	**151.00**
● black 1450 lm | 3000 K	**1010243**	**151.00**
● black 1500 lm | 4000 K	**1010249**	**151.00**
○ white 1400 lm | 2700 K	**1010239**	**151.00**
○ white 1450 lm | 3000 K	**1010245**	**151.00**
○ white 1500 lm | 4000 K	**1010251**	**151.00**

⊕

Product	Prod. no.	GBP
KALU 2.0, decorative ring		
○ white	**1010135**	**8.00**
● black	**1010136**	**8.00**
● gold	**1010138**	**8.00**
● copper	**1010139**	**8.00**
KALU 2.0, lens		
○ transparent | 15°	**1010140**	**17.00**
○ transparent | 24°	**1010141**	**17.00**
○ transparent | 36°	**1010142**	**17.00**
○ transparent | 60°	**1010143**	**17.00**

KALU TRACK
3-PHASE, QPAR111





IP20 · 350° · 90°

220-240 V ~50/60 Hz
Material: Aluminium/Plastic

SOCKET INSIDE · 75 W

Base: 1xGU10


Variant	Prod. no.	GBP
● black	**152610**	**78.00**
○ white	**152611**	**78.00**

GU10 | 12 W | 55°
670 lm | 2700 K | EEC = G

C,L

Prod. no.: 1005297 73.00 GBP

SIGHT EVO 600
3-PHASE, SINGLE

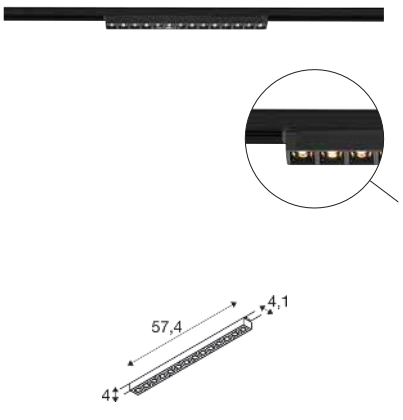

IP20 IK02 60° 50000h L80B20 UGR 19


220-240 V ~50/60 Hz | 500 mA
Total wattage: 18 W
Material: Aluminium/Plastic PC

LED INSIDE CRI 90

1010144	3000 K
1010146	2250 lm
1010145	4000 K
1010147	2250 lm

Variant	Prod. no.	GBP
● black 3000 K	**1010146**	**155.00**
● black 4000 K	**1010147**	**155.00**
◐ white/black 3000 K	**1010144**	**155.00**
◐ white/black 4000 K	**1010145**	**155.00**

SIGHT EVO 1200
3-PHASE, SINGLE

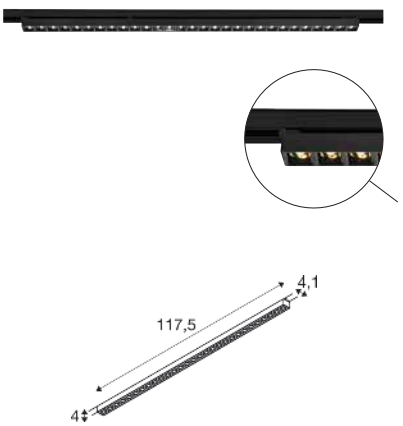

IP20 IK02 60° 50000h L80B20 UGR 16


220-240 V ~50/60 Hz | 700 mA
Total wattage: 25 W
Material: Aluminium/Plastic PC

LED INSIDE CRI 90

1010148	3000 K
1010150	3200 lm
1010149	4000 K
1010151	3200 lm

Variant	Prod. no.	GBP
● black 3000 K	**1010150**	**210.00**
● black 4000 K	**1010151**	**210.00**
◐ white/black 3000 K	**1010148**	**210.00**
◐ white/black 4000 K	**1010149**	**210.00**

SIGHT EVO 600
3-PHASE, DOUBLE

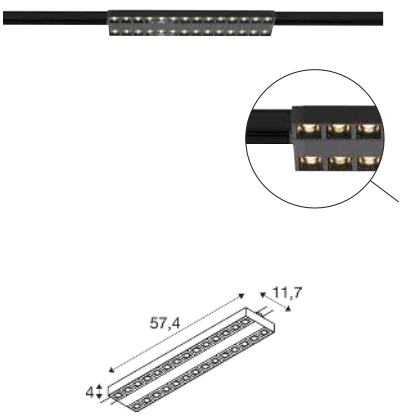

IP20 IK02 60° 50000h L80B20 UGR 16


220-240 V ~50/60 Hz | 700 mA
Total wattage: 25 W
Material: Aluminium/Plastic PC

LED INSIDE CRI 90

1010152	3000 K
1010154	3250 lm
1010153	4000 K
1010155	3350 lm

Variant	Prod. no.	GBP
● black 3250 lm | 3000 K	**1010154**	**218.00**
● black 3350 lm | 4000 K	**1010155**	**218.00**
◐ white/black 3250 lm | 3000 K	**1010152**	**218.00**
◐ white/black 3350 lm | 4000 K	**1010153**	**218.00**

SIGHT EVO 600
3-PHASE, SINGLE DALI

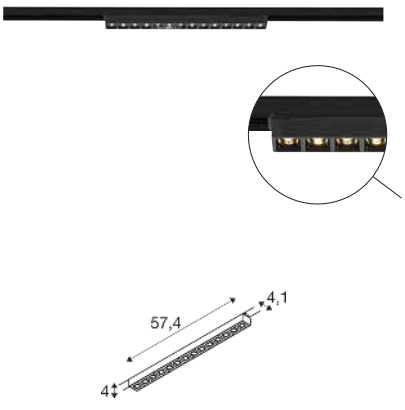

Dali | IP20 | IK02 | 60° | 50000h L80B20 | UGR 19


220-240 V ~50/60 Hz | 500 mA
Total wattage: 18 W
Material: Aluminium/Plastic PC

LED INSIDE | CRI 90

1010156	3000 K
1010158	2250 lm
1010157	4000 K
1010159	2250 lm

Variant	Prod. no.	GBP
● black 3000 K	**1010158**	**172.00**
● black 4000 K	**1010159**	**172.00**
◐ white/black 3000 K	**1010156**	**172.00**
◐ white/black 4000 K	**1010157**	**172.00**

SIGHT EVO 1200
3-PHASE, SINGLE DALI

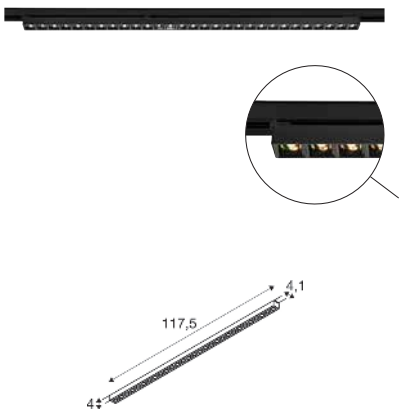

Dali | IP20 | IK02 | 60° | 50000h L80B20 | UGR 16


220-240 V ~50/60 Hz | 700 mA
Total wattage: 25 W
Material: Aluminium/Plastic PC

LED INSIDE | CRI 90

1010381	3000 K
1010383	3200 lm
1010382	4000 K
1010384	3200 lm

Variant	Prod. no.	GBP
● black 3000 K	**1010383**	**235.00**
● black 4000 K	**1010384**	**235.00**
◐ white/black 3000 K	**1010381**	**235.00**
◐ white/black 4000 K	**1010382**	**235.00**

SIGHT EVO 600
3-PHASE, DOUBLE DALI

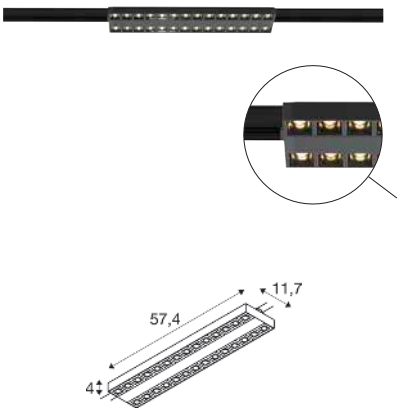

Dali | IP20 | IK02 | 60° | 50000h L80B20 | UGR 16


220-240 V ~50/60 Hz | 700 mA
Total wattage: 25 W
Material: Aluminium/Plastic PC

LED INSIDE | CRI 90

1010385	3000 K
1010387	3250 lm
1010386	4000 K
1010388	3350 lm

Variant	Prod. no.	GBP
● black 3250 lm | 3000 K	**1010387**	**243.00**
● black 3350 lm | 4000 K	**1010388**	**243.00**
◐ white/black 3250 lm | 3000 K	**1010385**	**243.00**
◐ white/black 3350 lm | 4000 K	**1010386**	**243.00**

SIGHT PANEL
3-PHASE

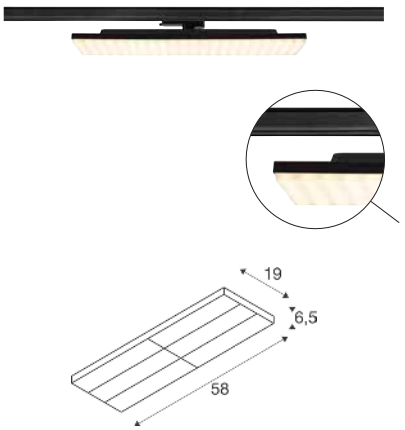

IP20 IK02 70° 50000 h L80B10 UGR 25


220-240 V ~50/60 Hz | 210 / 260 / 310 / 380 mA
Total wattage: 38 / 48 / 58 / 72 W

LED INSIDE CRI 90

1009146 **1009147**	38 W	3000 K 6300 lm
	48 W	3000 K 7700 lm
	58 W	3000 K 9000 lm
	72 W	3000 K 10800 lm
1009148 **1009149**	38 W	4000 K 6500 lm
	48 W	4000 K 7950 lm
	58 W	4000 K 9350 lm
	72 W	4000 K 11350 lm

Variant	Prod. no.	GBP
● black 6300 lm | 3000 K	**1009146**	**212.00**
● black 6500 lm | 4000 K	**1009148**	**212.00**
○ white 6300 lm | 3000 K	**1009147**	**212.00**
○ white 6500 lm | 4000 K	**1009149**	**212.00**

SIGHT PANEL
3-PHASE, DALI

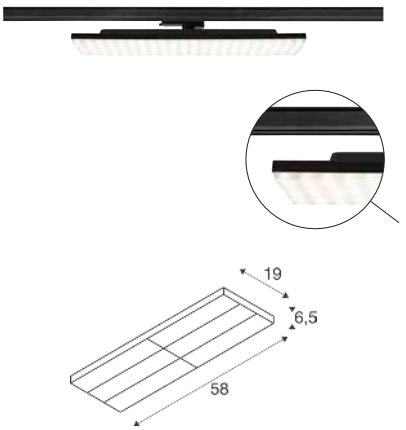

Dali IP20 IK02 70° 50000 h L80B10 UGR 25


220-240 V ~50/60 Hz | 330 mA
Total wattage: 65 W

LED INSIDE CRI 90

1009152 **1009153**	4000 K 11600 lm
1009150 **1009151**	3000 K 10100 lm

Variant	Prod. no.	GBP
● black 10100 lm | 3000 K	**1009150**	**285.00**
● black 11600 lm | 4000 K	**1009152**	**285.00**
○ white 10100 lm | 3000 K	**1009151**	**285.00**
○ white 11600 lm | 4000 K	**1009153**	**285.00**

SIGHT EASY
3-PHASE

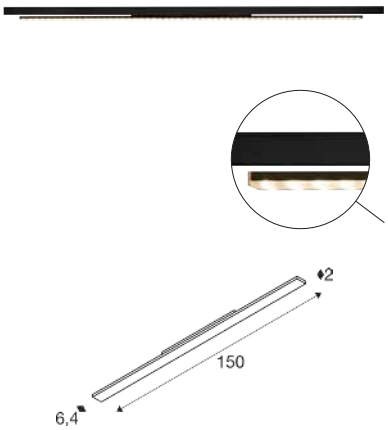

IP20 IK06 2x 25° 50000h L80B10 UGR 25


220-240 V ~50/60 Hz | 250 / 300 / 350 / 400 mA
Total wattage: 41 / 49 / 58 / 66 W
Material: Aluminium

LED INSIDE CRI 90

1008676 1008677	41 W	3000 K 6500 lm
	49 W	3000 K 7700 lm
	58 W	3000 K 9100 lm
	66 W	3000 K 10200 lm
1008678 1008679	41 W	4000 K 7100 lm
	49 W	4000 K 8200 lm
	58 W	4000 K 9600 lm
	66 W	4000 K 10900 lm

Variant	Prod. no.	GBP
● black 650 lm | 3000 K	**1008676**	**163.00**
● black 2100 lm | 4000 K	**1008678**	**163.00**
○ white 650 lm | 3000 K	**1008677**	**163.00**
○ white 2100 lm | 4000 K	**1008679**	**163.00**

SIGHT EASY
3-PHASE, DALI

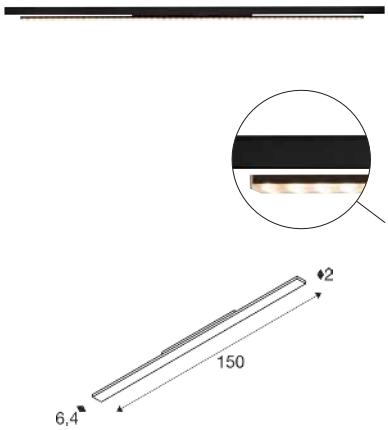

Dali IP20 IK06 2x 25° 50000h L80B10 UGR 25

220-240 V ~50/60 Hz | 250 / 300 / 350 / 400 mA
Total wattage: 41 / 49 / 58 / 66 W
Material: Aluminium


LED INSIDE CRI 90

1008728 1008729	41 W	3000 K 6500 lm
	49 W	3000 K 7700 lm
	58 W	3000 K 9100 lm
	66 W	3000 K 10200 lm
1008730 1008731	41 W	4000 K 7100 lm
	49 W	4000 K 8200 lm
	58 W	4000 K 9600 lm
	66 W	4000 K 10900 lm

Variant	Prod. no.	GBP
● black 650 lm | 3000 K	**1008728**	**201.00**
● black 2100 lm | 4000 K	**1008730**	**201.00**
○ white 650 lm | 3000 K	**1008729**	**201.00**
○ white 2100 lm | 4000 K	**1008731**	**201.00**

SIGHT TRACK
3-PHASE, DALI





Dali IP20 120° 30000h L70B50 UGR 25

220-240 V ~50/60 Hz | 700 mA
Total wattage: 39 W
Material: Aluminium/Acrylic


LED INSIDE CCT CRI 90

3000 K	4000 K
3000 lm	3000 lm

Variant	Prod. no.	GBP
● black	**1005397**	**327.00**
○ white	**1005399**	**327.00**

SIGHT TRACK
3-PHASE





IP20 120° 30000h L70B50 UGR 25

220-240 V ~50/60 Hz | 700 mA
Total wattage: 37 W
Material: Aluminium/Acrylic


LED INSIDE CCT CRI 90

3000 K	4000 K
3000 lm	3000 lm

Variant	Prod. no.	GBP
● black	**1005400**	**268.00**
○ white	**1005401**	**268.00**
● grey	**1005402**	**268.00**

SIGHT MOVE
3-PHASE, DALI





Dali IP20 75° 120° 30000h L70B50 UGR 25

220-240 V ~50/60 Hz | 350 mA
Total wattage: 26 W
Material: Aluminium/Polymethylmethacrylate (PMMA)


LED INSIDE CRI 90

1004692 **1004693**	4000 K 3100 lm
1004690 **1004691**	3000 K 2700 lm

Variant	Prod. no.	GBP
● black 2700 lm | 3000 K	**1004690**	**222.00**
● black 3100 lm | 4000 K	**1004692**	**222.00**
○ white 2700 lm | 3000 K	**1004691**	**222.00**
○ white 3100 lm | 4000 K	**1004693**	**222.00**

SIGHT MOVE
3-PHASE





IP20 75° 120° 30000h L70B50 UGR 25

220-240 V ~50/60 Hz | 350 mA
Total wattage: 26 W
Material: Aluminium/Polymethylmethacrylate (PMMA)

LED INSIDE CRI 90


1004688 **1004689**	4000 K 3100 lm
1004687	3000 K 2700 lm

Variant	Prod. no.	GBP
● black 2700 lm | 3000 K	**1004686**	**159.00**
● black 3100 lm | 4000 K	**1004688**	**159.00**
○ white 2700 lm | 3000 K	**1004687**	**159.00**
○ white 3100 lm | 4000 K	**1004689**	**159.00**



PARA CONE 14
3-PHASE, GU10







220-240 V ~50/60 Hz
Material: Steel

SOCKET INSIDE 25 W

Base: 1xGU10


Variant	Prod. no.	GBP
black/gold	**1008055**	**74.00**
white/gold	**1008056**	**74.00**
copper/white	**1008057**	**77.00**
aluminium	**1009139**	**74.00**

GU10 | 3 W | 360°
270 lm | 2700 K | EEC = G

Prod. no.: **1006321** **42.00 GBP**

PARA CONE 14
3-PHASE, PD, GU10





IP20 | 150 cm

220-240 V ~50/60 Hz
Material: Steel

SOCKET INSIDE 35 W

Base: 1xGU10

Variant	Prod. no.	GBP
black/gold	1008061	100.00
white/gold	1008062	100.00
copper/white	1008063	109.00
aluminium	1009141	100.00

GU10 | 3 W | 360°
270 lm | 2700 K | EEC = G

Prod. no.: 1006321 42.00 GBP


SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: 1012469 23.00 GBP

PARA CONE GL
3-PHASE, GU10





IP20 | 300° | 90°

220-240 V ~50/60 Hz
Material: Aluminium/Glass

SOCKET INSIDE 25 W

Base: 1xGU10


Variant	Prod. no.	GBP
black	1006157	88.00
white	1006158	88.00

GU10 | 3 W | 360°
270 lm | 2700 K | EEC = G

Prod. no.: 1006321 42.00 GBP

PARA CONE GL
PD, GU10





IP20 | 250

220-240 V ~50/60 Hz
Material: Aluminium/Glass

- Open cable end

SOCKET INSIDE 25 W

Base: 1xGU10

Variant	Prod. no.	GBP
black	1006159	73.00
white	1006160	73.00

GU10 | 3 W | 360°
270 lm | 2700 K | EEC = G


Prod. no.: 1006321 42.00 GBP

Product	Prod. no.	GBP
Fitu | Single ceiling rosette		
black	132600	23.00
white	132601	23.00
chrome	132605	26.00
1-phase light adapter		
black	143120	14.00
white	143121	14.00
grey	143124	14.00
3-phase light adapter		
black	145990	18.00
grey	145994	18.00
white	1001542	18.00
Recessed ceiling rosette		
black	1004674	21.00
white	1004675	21.00
Surface-mounted ceiling rosette		
black	1004744	31.00


1008541 599

FORCHINI M 40 TRACK
3-PHASE, PD, E27





IP20 150 cm

220-240 V ~50/60 Hz
Material: Steel/Aluminium

SOCKET INSIDE 40 W

Base: 1xE27 | max. Ø: 6.8 cm | L: 15.2 cm

Variant	Prod. no.	GBP
black/gold	**1008541**	**201.00**

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F

Prod. no.: **1005303** **9.00 GBP**

SMART


E27 | 9 W | 180°
806 lm | 2700 K | EEC = F

Prod. no.: **1012471** **14.00 GBP**



LIGHT EYE® 90
3-PHASE, PD, QPAR51





IP20 150 cm

220-240 V ~50/60 Hz
Material: Steel

SOCKET INSIDE 6 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 5.35 cm

Variant	Prod. no.	GBP
● black	**1008170**	**73.00**
○ white	**1008171**	**73.00**

GU10 | 6 W | 38°
470 lm | 3000 K | EEC = F


C,L

Prod. no.: **1005080** **7.00 GBP**

Product	Prod. no.	GBP
Decorative ring Ø 5.7 cm		
● black	**1008186**	**8.00**
○ white	**1008187**	**8.00**
● gold	**1008188**	**13.00**
◑ chrome	**151049**	**13.00**

LIGHT EYE® 150
3-PHASE, PD, QPAR111





IP20 | 150 cm

220-240 V ~50/60 Hz
Material: Steel

SOCKET INSIDE | 13 W

Base: 1xGU10 | max. Ø: 11.1 cm | L: 7 cm

Variant	Prod. no.	GBP
● black	1008176	113.00
○ white	1008177	113.00

GU10 | 12 W | 55°
680 lm | 3000 K | EEC = G


C,L

Prod. no.: 1005298 73.00 GBP

Product	Prod. no.	GBP
Decorative ring Ø 13.6 cm		
● black	1008189	31.00
○ white	1008190	31.00
◑ chrome	1008191	39.00
● gold	1008192	39.00

LIGHT EYE® 150
3-PHASE, QPAR111





IP20 | 330° | 90°

220-240 V ~50/60 Hz
Material: Steel

SOCKET INSIDE | 13 W

Base: 1xGU10 | max. Ø: 11.1 cm | L: 7 cm

Variant	Prod. no.	GBP
● black	1008184	113.00
○ white	1008185	113.00

GU10 | 12 W | 55°
680 lm | 3000 K | EEC = G

C,L

Prod. no.: 1005298 73.00 GBP

Product	Prod. no.	GBP
Decorative ring Ø 13.6 cm		
● black	1008189	31.00
○ white	1008190	31.00
◑ chrome	1008191	39.00
● gold	1008192	39.00

LIGHT EYE® 90
DECORATIVE RING Ø 5.7 CM



Ø: 5.9 cm
H: 1.4 cm
Material: Steel

Variant	Prod. no.	GBP
● black	1008186	8.00
○ white	1008187	8.00
● gold	1008188	13.00
◑ chrome	151049	13.00

LIGHT EYE® 150
DECORATIVE RING Ø 13.6 CM




Ø: 13.6 cm
H: 2.3 cm
Material: Steel

Variant	Prod. no.	GBP
● black	1008189	31.00
○ white	1008190	31.00
● gold	1008192	39.00
◑ chrome	1008191	39.00


KEEP OFF

EURO SPOT TRACK
3-PHASE, QPAR111





IP20 350° 100°

220-240 V ~50/60 Hz
Material: Aluminium

SOCKET INSIDE 17.5 W

Base: 1xGU10


Variant	Prod. no.	GBP
● black	**153420**	**91.00**
○ white	**153421**	**91.00**

GU10 | 13 W | 10°
900 lm | 2700 K | EEC = G

Prod. no.: 1005275 48.00 GBP

EURO SPOT TRACK
3-PHASE, QPAR51





IP20 350° 100°

220-240 V ~50/60 Hz
Material: Aluminium

SOCKET INSIDE 25 W

Base: 1xGU10

Variant	Prod. no.	GBP
● black	**153850**	**73.00**
○ white	**153851**	**73.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no.: 1005077 7.00 GBP

SMART


GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: 1012469 23.00 GBP


152961 605

HELIA 50 TRACK
3-PHASE







220-240 V ~50/60 Hz | 500 mA
Total wattage: 11 W
Material: Aluminium



	3000 K
152960	920 lm
152961	970 lm

Variant	Prod. no.	GBP
● black 920 lm	**152960**	**79.00**
○ white 970 lm	**152961**	**79.00**

SYMBOLS KEY

Recommendations
Displays accessories and recommended light bulbs for the chosen products

Mix & Match
Indicates products that can be combined

Energy efficiency class
"This light is suitable for bulbs with an energy efficiency rating of ..."

Protection classes
- Protection class I / Protective conductor
- Protection class II/ Protection by double or reinforced insulation
- Protection class III/ Protection by extra-low voltage

Dimmable with:
- **C** = Trailing-edge phase dimmer
- **L** = Leading-edge phase dimmer
- **Uni** = Universal dimmer
- **1–10 V**
- **Dali** = DALI bus system
- **Switch** = Switch/button or touch control on the light
- **Touch** = Simple, stepless operation; responds to touch

IP protection rating:
Indicates the suitability of electrical equipment for different environmental conditions.

IK impact resistance rating:
The IK impact resistance rating is a measure of the resistance of housings for electrical equipment to mechanical stress, especially impact stress.

Half-diffusion angle:
Describes the beam angle in degrees. The smaller the angle, the more concentrated the light will be.

Rotation and pivoting capacity in degrees:
- Rotation range
- Pivot range
- Gimballed

Preservation of luminous flux:
Describes the amount by which the luminous flux of an LED decreases during a specified period.

Unified Glare Rating:
The lower the UGR value, the lower the psychological glare.

Pendant cable length
in cm

Cable length:
Mains plugs, connectors and supply cables (with open cable end) in cm

Through-wiring possible

Shape of the installation opening

Specification of the installation depth

Drive-over capability of the product ensured

Weight-bearing capacity of the product up to the specified value in tonnes. Measurements based on installation in concrete.

Sea-air resistant coating

Independent converter:
Control equipment also for use outside of lights

Short-circuit protected safety control equipment

Light colour temperature in Kelvin (K)

Luminous flux in lumens (lm)

Dark Sky
Indicates that the light emits almost no light into the upper half-space (ULOR < 2 %). Reduces light pollution and ensures targeted, needs-based illumination of the usable area.

Primary/Replica
Indicates lights with integrated primary/replica function. A sensor light (primary) controls downstream lights (replica) via a switched phase, enabling simple, networked lighting control without additional bus or control systems.

Connected lighting:
Indicates smart products that use the following protocols:
- Zigbee®
- DALI
- Bluetooth

Allows the installation of electrical control equipment on materials whose flammability is not known.

CCT switch:
By means of an integrated CCT switch, the light colour can be changed from 2700 K, 3000 K, 4000 K to 6500 K during installation.

Dim-to-warm:
With dimmers, the light colour can be altered from cold white to warm white.

Indicates lights with RGB+W and RGB
(Red-Green-Blue + White and Red-Green-Blue)

Indicates lights with motion sensors
(Microwaves (MR) - Technology / Infrared / Radio)

Products with integrated LEDs

Products with light socket

KS Licht – Your lighting wholesaler in Essen

Contact, customer service and information for customers
BIG WHITE 2027

Directly linked to our product range, advice and project services:

In the KS Multi Brand Business online shop, you will find the latest products, new releases and special offers, as well as information to support you with advice, quotations and project management:

- Online stock availability check
- Catalogues, browsable catalogues and product links
- Technical data, tender specifications, light distribution curves and LDT files
- Easily find and order spare parts
- View your individual terms and conditions, delivery and payment terms
- Relevant product recommendations, variants and alternative products
- Direct contact with our sales team

Customer Information

All prices are net, plus statutory VAT. The retail prices quoted are recommended retail prices. Upon publication of this catalogue, previous price lists cease to be valid.
Illustrations, colours, shapes, designs and technical specifications are for illustrative purposes only and are not binding. Subject to changes and errors.
Goods are generally dispatched ex works, carriage forward.
For orders with a net value of less than €70.00, a minimum order surcharge of €8.00 will be applied.

Ordering & Delivery

When placing orders, please always specify the item number, colour and quantity. This reduces the need for follow-up enquiries and speeds up processing.
Express and direct deliveries are available on request.
Custom-made items, components assembled to the customer's specifications and lamps are excluded from exchange.
Our General Terms and Conditions apply and are available at www.ks-germany.com/de/agb.

Kontakt

KS Licht- und Elektrotechnik GmbH
Manderscheidtstraße 8 c
45141 Essen
Germany

Verkauf & Service
Tel.: +49 (0)201-89924-0
verkauf@ks-germany.com

Online
ks-light.co.uk
www.ks-germany.com

Pflichtangaben

KS Licht- und Elektrotechnik GmbH · Sitz der Gesellschaft: Essen · Geschäftsführer: Kai Becker
Registergericht: Amtsgericht Essen · Handelsregister: HRB 12736 · Steuer-Nr.: 111/5708/2689 ·
USt-IdNr.: DE190673411

KS Licht- und Elektrotechnik GmbH
Manderscheidtstraße 8 c
45141 Essen
Germany

Tel.: +49 (0)201-89924-0

B2B-Shop: **ks-light.co.uk**
Website: www.ks-germany.com
E-Mail: verkauf@ks-germany.com

Opening hours
Monday – Thursday 08:00 – 16:30
Friday 08:00 – 15:00