BIG WHITE®
2027

SLV LIGHTING CATALOGUE



48 V SYSTEMS

INDOOR | 48 V SYSTEMS



KALU 2.0 | 439



LIGHT EYE® 2.0 | 439



DYSKO | 441



NUMINOS® | 442–449



IN-LINE | 450–453



FIX-IT! | 454–457



GRIP! FLAT | 459





GRIP! S | 460–461



GRIP! S | 463



GRIP! S MINI | 463



GRIP! M | 465




LALU® SET | 466–467

48V
TRACK SYSTEM

The 48V track system combines premium design with maximum flexibility. Different track geometries (straight, curved, L-, T- or X-shaped), together with surface-mounted, recessed and suspended installation options, offer extensive possibilities for a wide range of interior concepts..

The three-dimensional track layout enables seamless transitions from ceiling to wall. The integrated DALI control system enables individual control of each light and delivers flicker-free, precisely dimmable lighting.


The result is a future-proof track system for residential and commercial applications.

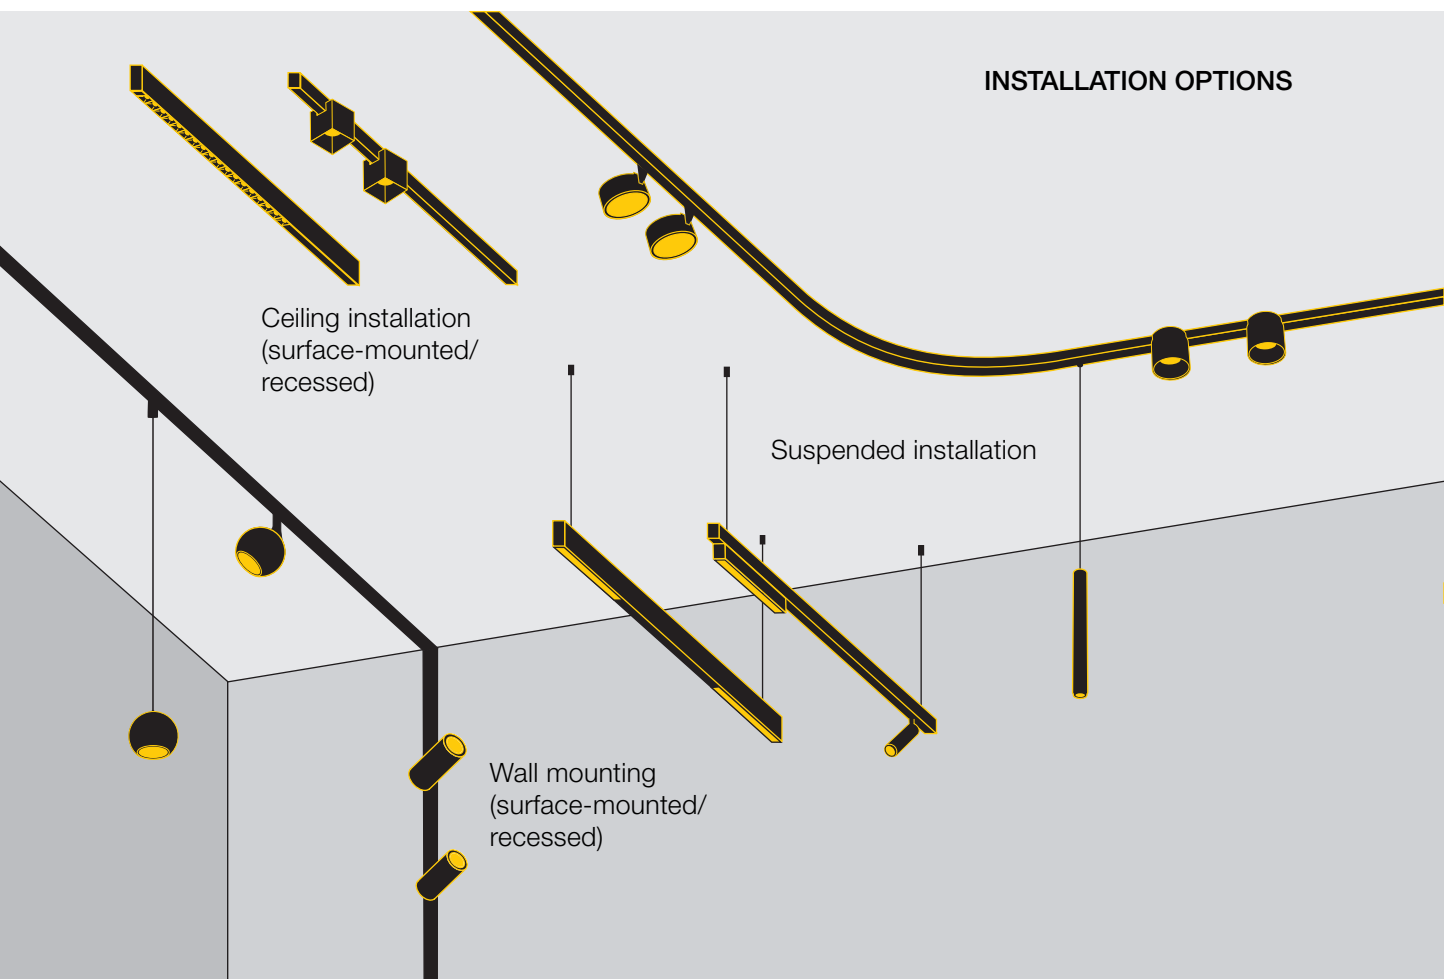


SYSTEM STRUCTURE

SELECT TRACK


Standard
surface-mounted track



Deep
surface-mounted track



Recessed track
for plasterboard ceilings

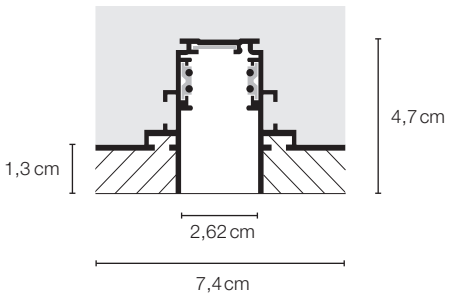

DEFINE THE GEOMETRY

and select the appropriate accessories and LED drivers

SELECT LIGHTS

Choose from a wide range of decorative and functional lights to tailor the lighting concept to your space.



Spots for directional accent lighting and highlighting objects




Linear lights for uniform general and area lighting

Pendant lights for decorative accents and zoned lighting

48V SYSTEM TRACK
STANDARD SURFACE-MOUNTED TRACK, DALI







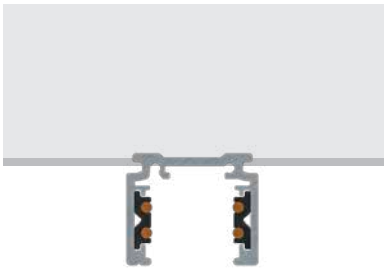

	100 cm	100 cm	200 cm	200 cm
Nominal voltage (V)	48 V	48 V	48 V	48 V
Max. current (A)	16 A max.	16 A max.	16 A max.	16 A max.
Colour	● black	○ white	● black	○ white
Material	Aluminium	Aluminium	Aluminium	Aluminium
L x W x H (cm)	100 cm × 2.6 cm × 2.3 cm	100 cm × 2.6 cm × 2.3 cm	200 cm × 2.6 cm × 2.3 cm	200 cm × 2.6 cm × 2.3 cm
Prod. no.	**1006541**	**1006542**	**1006543**	**1006544**
GBP	**44.00**	**44.00**	**75.00**	**75.00**

	300 cm	300 cm	400 cm	400 cm
Nominal voltage (V)	48 V	48 V	48 V	48 V
Max. current (A)	16 A max.	16 A max.	16 A max.	16 A max.
Colour	● black	○ white	● black	○ white
Material	Aluminium	Aluminium	Aluminium	Aluminium
L x W x H (cm)	300 cm × 2.6 cm × 2.3 cm	300 cm × 2.6 cm × 2.3 cm	400 cm × 2.6 cm × 2.3 cm	400 cm × 2.6 cm × 2.3 cm
Prod. no.	**1006545**	**1006546**	**1006547**	**1006548**
GBP	**117.00**	**117.00**	**159.00**	**159.00**

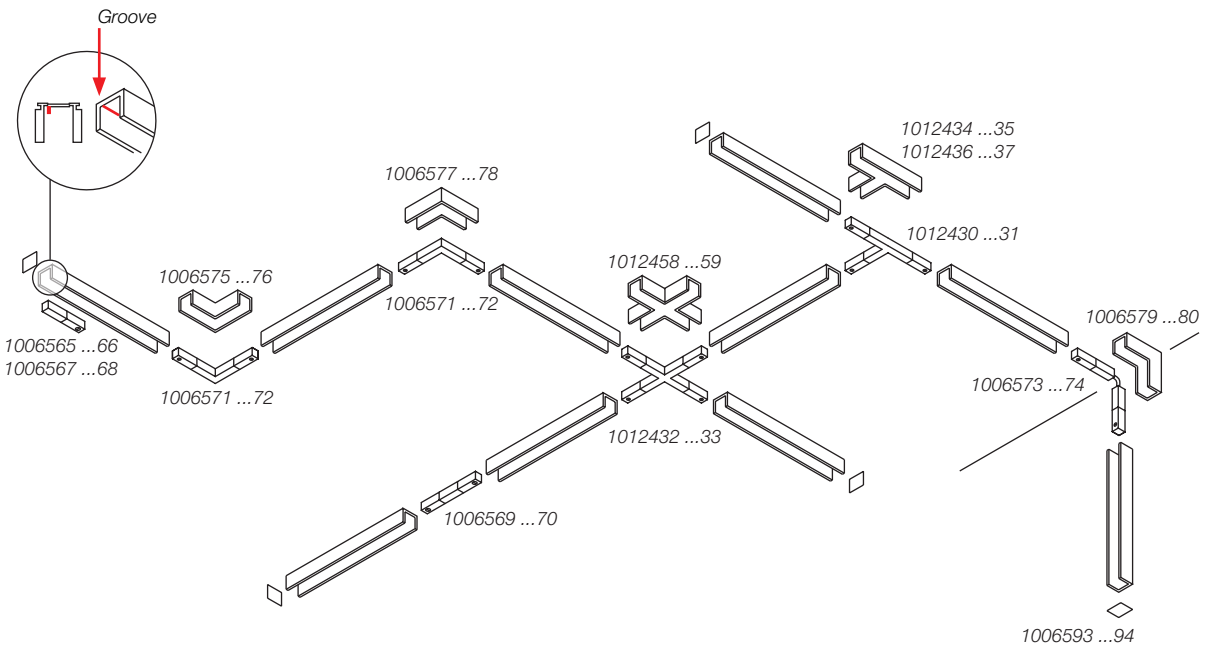
Groove
1012434 ...35
1012436 ...37
1006577 ...78
1012430 ...31
1012458 ...59
1006575 ...76
1006571 ...72
1006579 ...80
1006565 ...66
1006567 ...68
1006573 ...74
1006571 ...72
1012432 ...33
1006569 ...70
1006593 ...94

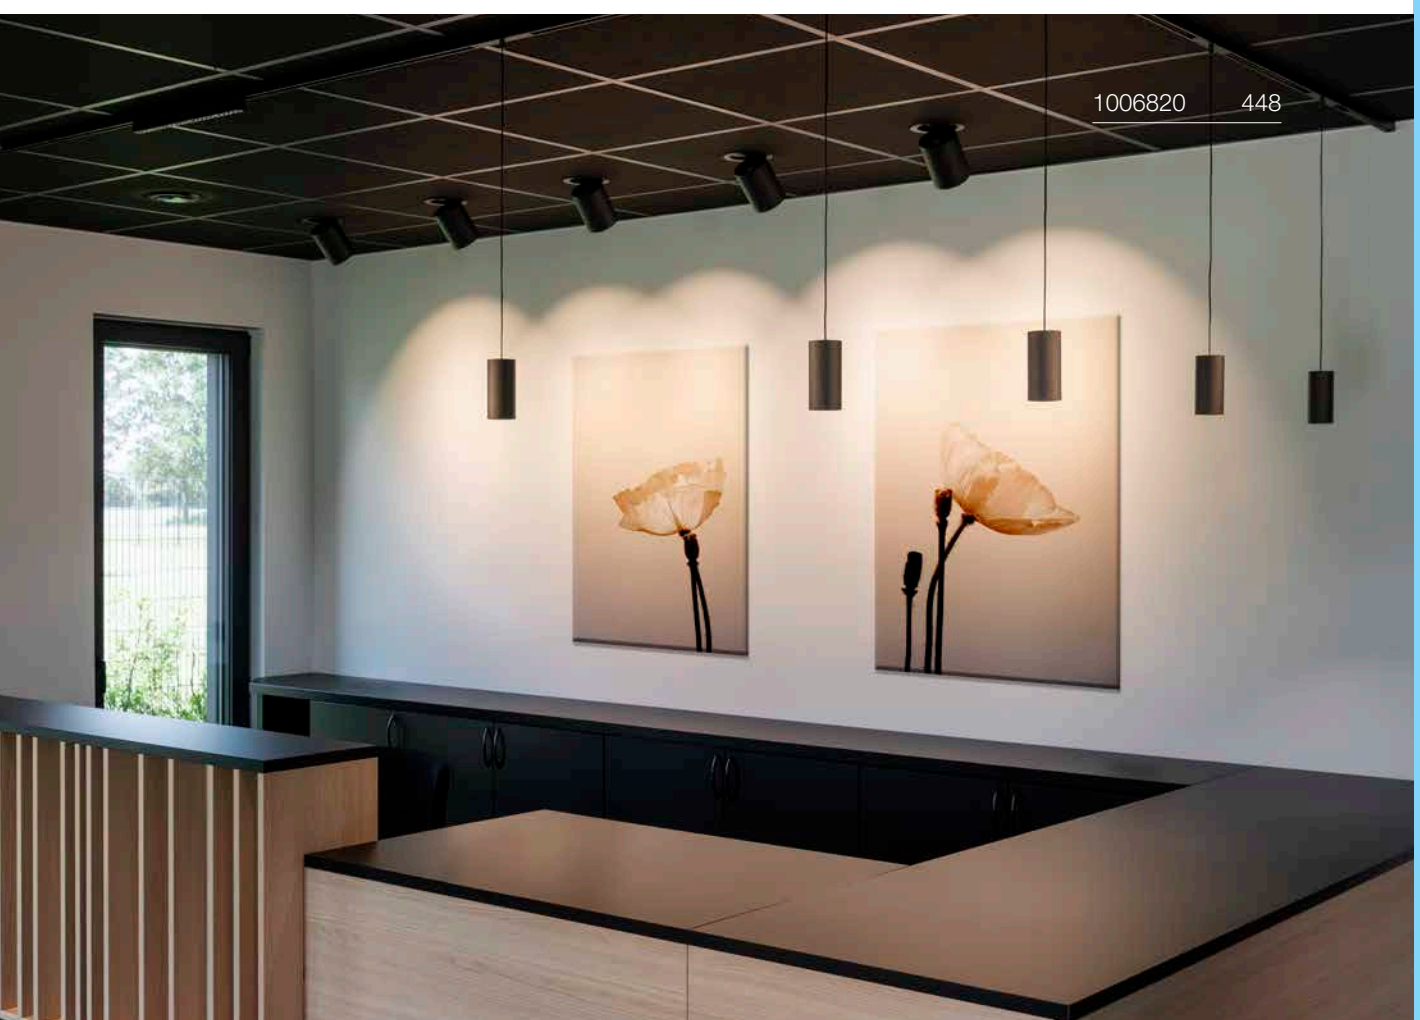

1006820 448

48V SYSTEM TRACK
STANDARD SURFACE-MOUNTED TRACK, CURVED, DALI

NEW






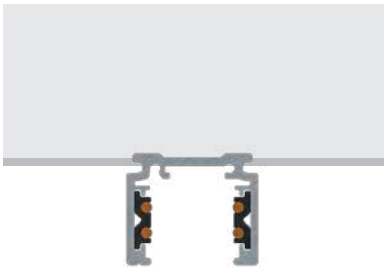


	79 cm	79 cm	79 cm	79 cm
Radius	50 cm	50 cm	50 cm	50 cm
Orientation	left	left	right	right
Nominal voltage (V)	48 V	48 V	48 V	48 V
Max. current (A)	16 A max.	16 A max.	16 A max.	16 A max.
Colour	● black	○ white	● black	○ white
Material	Aluminium	Aluminium	Aluminium	Aluminium
L x W x H (cm)	79 cm × 2.6 cm × 2.3 cm	79 cm × 2.6 cm × 2.3 cm	79 cm × 2.6 cm × 2.3 cm	79 cm × 2.6 cm × 2.3 cm
Prod. no.	**1012415**	**1012416**	**1012417**	**1012418**
GBP	**82.00**	**82.00**	**82.00**	**82.00**

	126 cm	126 cm	126 cm	126 cm
Radius	80 cm	80 cm	80 cm	80 cm
Orientation	left	left	right	right
Nominal voltage (V)	48 V	48 V	48 V	48 V
Max. current (A)	16 A max.	16 A max.	16 A max.	16 A max.
Colour	● black	○ white	● black	○ white
Material	Aluminium	Aluminium	Aluminium	Aluminium
L x W x H (cm)	126 cm × 2.6 cm × 2.3 cm	126 cm × 2.6 cm × 2.3 cm	126 cm × 2.6 cm × 2.3 cm	126 cm × 2.6 cm × 2.3 cm
Prod. no.	**1012586**	**1012419**	**1012420**	**1012421**
GBP	**109.00**	**109.00**	**109.00**	**109.00**

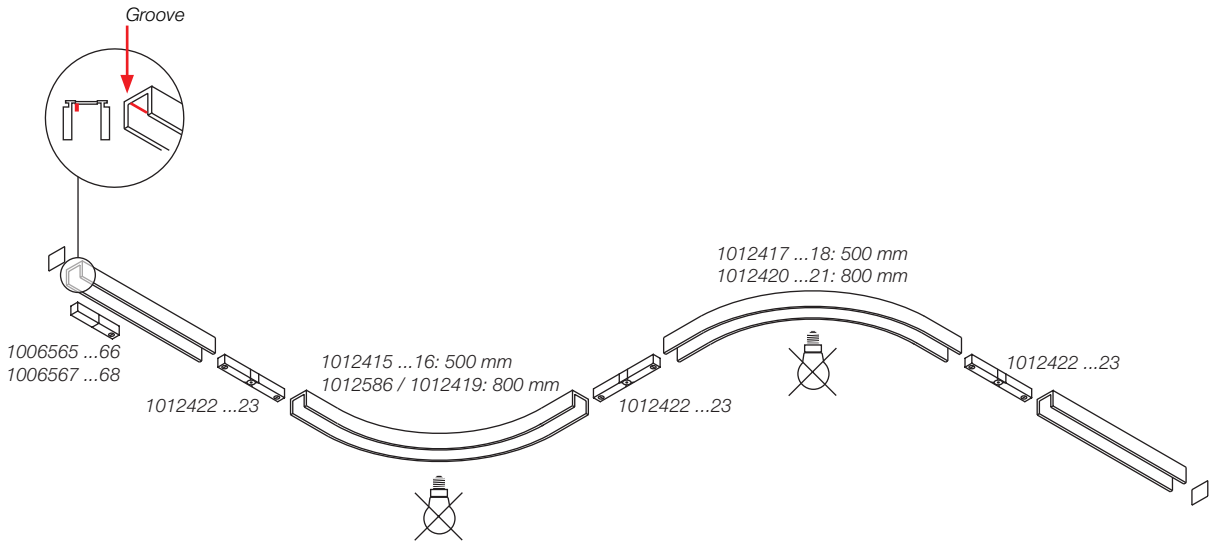

Curved tracks are currently not suitable for use with lights or power feed units.

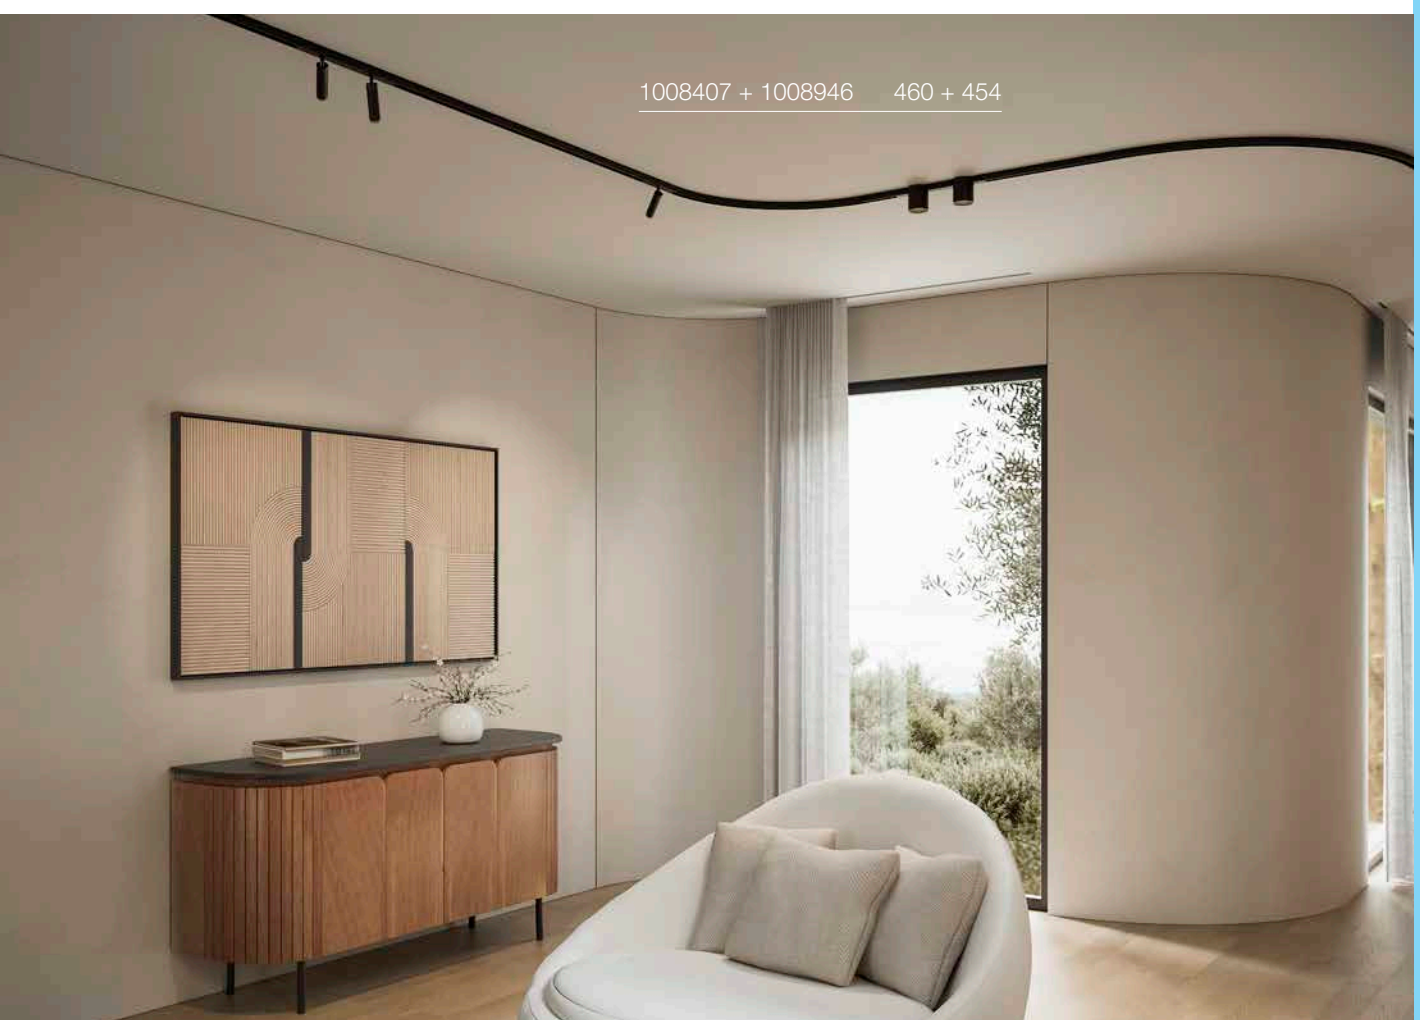



END FEED, LEFT

9.7 cm | Polycarbonate (PC)
L: 9.7 cm | W: 1.6 cm | H: 1.9 cm

● black	Prod. no.	**1006565**	**13.00 GBP**
○ white	Prod. no.	**1006566**	**13.00 GBP**



END FEED, RIGHT

9.7 cm | Polycarbonate (PC)
L: 9.7 cm | W: 1.6 cm | H: 1.9 cm

● black	Prod. no.	**1006567**	**13.00 GBP**
○ white	Prod. no.	**1006568**	**13.00 GBP**



MECHANICAL L-CONNECTOR FOR STANDARD SURFACE-MOUNTED TRACK, LEFT (FOR CEILING INSTALLATION)

7.1 cm | Aluminium
L: 7.1 cm, W: 7.1 cm, H: 2.2 cm

● black	Prod. no.	**1006575**	**20.00 GBP**
○ white	Prod. no.	**1006576**	**20.00 GBP**



MECHANICAL L-CONNECTOR FOR STANDARD SURFACE-MOUNTED TRACK, RIGHT (FOR CEILING INSTALLATION)

7.1 cm | Aluminium
L: 7.1 cm, W: 7.1 cm, H: 2.2 cm

● black	Prod. no.	**1006577**	**20.00 GBP**
○ white	Prod. no.	**1006578**	**20.00 GBP**



MECHANICAL L-CONNECTOR FOR STANDARD SURFACE-MOUNTED TRACK, STEREO, (WALL/CEILING)

8.4 cm | Aluminium
L: 8.4 cm, W: 2.6 cm, H: 8.4 cm


● black	Prod. no.	**1006579**	**20.00 GBP**
○ white	Prod. no.	**1006580**	**20.00 GBP**



ELECTRICAL L-CONNECTOR, DALI

11.4 cm | Polycarbonate (PC)
L: 11.4 cm, W: 11.4 cm, H: 1.9 cm


● black	Prod. no.	**1006571**	**25.00 GBP**
○ white	Prod. no.	**1006572**	**25.00 GBP**



T-CONNECTOR, MECHANICAL, FOR SURFACE-MOUNTED STANDARD TRACK, LEFT 1

Aluminium
W: 7.4 cm | H: 2.3 cm


● black	Prod. no.	**1012434**	**37.00 GBP**
○ white	Prod. no.	**1012435**	**37.00 GBP**



T-CONNECTOR, MECHANICAL, FOR SURFACE-MOUNTED STANDARD TRACK, LEFT 2

Aluminium
W: 7.4 cm | H: 2.3 cm


● black	Prod. no.	**1012436**	**37.00 GBP**
○ white	Prod. no.	**1012437**	**37.00 GBP**



T-CONNECTOR, MECHANICAL, FOR SURFACE-MOUNTED STANDARD TRACK, RIGHT 1

Aluminium
W: 7.4 cm | H: 2.3 cm

● black	Prod. no.	**1012438**	**37.00 GBP**
○ white	Prod. no.	**1012439**	**37.00 GBP**



T-CONNECTOR, MECHANICAL, FOR SURFACE-MOUNTED STANDARD TRACK, RIGHT 2

Aluminium
W: 7.4 cm | H: 2.3 cm

● black	Prod. no.	**1012440**	**37.00 GBP**
○ white	Prod. no.	**1012441**	**37.00 GBP**



ELECTRICAL T-CONNECTOR, DALI

13.3 cm
L: 13.3 cm | W: 7.5 cm | H: 1.8 cm

● black	Prod. no.	**1012430**	**39.00 GBP**
○ white	Prod. no.	**1012431**	**39.00 GBP**



X-CONNECTOR, MECHANICAL, FOR SURFACE-MOUNTED STANDARD TRACK

7.4 cm
L: 7.4 cm | W: 7.4 cm | H: 2.3 cm

● black	Prod. no.	**1012458**	**46.00 GBP**
○ white	Prod. no.	**1012459**	**46.00 GBP**



ELECTRICAL X-CONNECTOR, DALI

133 cm | Plastic PC
L: 133 cm | W: 13.3 cm | H: 1.8 cm

● black	Prod. no.	**1012432**	**48.00 GBP**
○ white	Prod. no.	**1012433**	**48.00 GBP**



Electrical longitudinal connector, DALI

14.4 cm | Polycarbonate (PC)
L: 14.4 cm | W: 1.6 cm | H: 1.9 cm

● black	Prod. no.	**1006569**	**20.00 GBP**
○ white	Prod. no.	**1006570**	**20.00 GBP**



SHORT & FLEXIBLE LONGITUDINAL ELECTRICAL CONNECTOR, INCLUDING REINFORCEMENT PLATE FOR CURVED TRACKS, DALI

10.7 cm | Plastic PC
L: 10.7 cm | W: 1.6 cm | H: 1.7 cm

●	black	Prod. no.	**1012422**	**33.00 GBP**
○	white	Prod. no.	**1012423**	**33.00 GBP**



FLEXIBLE CONNECTOR, ELECTRICAL, DALI

23 cm | Polycarbonate (PC)
L: 23 cm | W: 1.6 cm | H: 1.9 cm

●	black	Prod. no.	**1006573**	**26.00 GBP**
○	white	Prod. no.	**1006574**	**26.00 GBP**



EXTERNAL POWER ADAPTER 48 V | 60 W

18 cm | Polycarbonate (PC)
L: 18 cm | W: 4.5 cm | H: 2.7 cm

○	white	Prod. no.	**1006613**	**52.00 GBP**



EXTERNAL POWER ADAPTER 48 V | 150 W

19.1 cm | Metal/Polycarbonate (PC)
L: 19.1 cm | W: 8.8 cm | H: 3.6 cm

●	black	Prod. no.	**1006614**	**113.00 GBP**



COVER, 20 MM FOR STANDARD TRACK ASSEMBLY, 2 M

200 mm, Aluminium/Polycarbonate (PC)
L: 200 cm | W: 2 cm | H: 0.6 cm

●	black	Prod. no.	**1006611**	**10.00 GBP**
○	white	Prod. no.	**1006612**	**10.00 GBP**



END CAP FOR STANDARD SURFACE-MOUNTED TRACK

2.6 cm | Polycarbonate (PC)
L: 2.6 cm | W: 0.2 cm | H: 2.2 cm

●	black	Prod. no.	**1006593**	**4.00 GBP**
○	white	Prod. no.	**1006594**	**4.00 GBP**



TRACK REINFORCEMENT PLATE FOR SURFACE-MOUNTED TRACK

5 cm | Steel
L: 5 cm | W: 1.3 cm | H: 0.3 cm

●	grey	Prod. no.	**1006609**	**8.00 GBP**



TRACK REINFORCEMENT PLATE WITH MOUNTING SET, 3M WIRE ROPE

12 cm | Steel
L: 12 cm | W: 2.7 cm

●	black	Prod. no.	**1006603**	**20.00 GBP**
○	white	Prod. no.	**1006604**	**20.00 GBP**



TRACK REINFORCEMENT PLATE WITH MOUNTING SET, 1M ROD

12 cm | Steel
L: 12 cm | W: 2.7 cm

●	black	Prod. no.	**1006601**	**20.00 GBP**
○	white	Prod. no.	**1006602**	**20.00 GBP**



PENDANT SUSPENSION, 1M ROD

steel
W: 2.9 cm

●	black	Prod. no.	**1006605**	**16.00 GBP**
○	white	Prod. no.	**1006606**	**16.00 GBP**



PENDANT SUSPENSION, 3M WIRE ROPE

steel
W: 2.9 cm

●	black	Prod. no.	**1006607**	**16.00 GBP**
○	white	Prod. no.	**1006608**	**16.00 GBP**



MOUNTING BRACKET

3 cm | Aluminium
L: 3 cm | W: 2.7 cm | H: 1.1 cm

●	black	Prod. no.	**1006599**	**7.00 GBP**
○	white	Prod. no.	**1006600**	**7.00 GBP**



INCLUDES CASAMBI TO DALI CONVERTER

28 cm | Plastic PC
L: 28 cm | W: 2.3 cm | H: 4.4 cm
The integrated Casambi-to-DALI module enables wireless control via the Casambi app and Casambi smart controllers.

●	black	Prod. no.	**1008382**	**343.00 GBP**
○	white	Prod. no.	**1008383**	**343.00 GBP**



ON/OFF

28 cm | Plastic PC
L: 28 cm | W: 2.3 cm | H: 4.4 cm

●	black	Prod. no.	**1007874**	**163.00 GBP**
○	white	Prod. no.	**1007875**	**163.00 GBP**



INCLUDES DALI THROUGH-WIRING

29.8 cm | Plastic PC
L: 29.8 cm | W: 1.6 cm | H: 1.9 cm

●	black	Prod. no.	**1010446**	**93.00 GBP**
○	white	Prod. no.	**1010447**	**93.00 GBP**



INCLUDES DALI THROUGH-WIRING


26.8 cm | Polycarbonate (PC)
L: 26.8 cm | W: 2.2 cm | H: 4.4 cm

●	black	Prod. no.	**1009012**	**119.00 GBP**
○	white	Prod. no.	**1009001**	**119.00 GBP**

48V SYSTEM TRACK
DALI DEEP SURFACE-MOUNTED TRACK







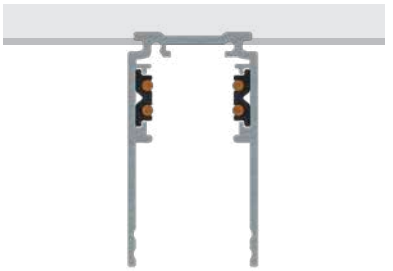

	100 cm	100 cm	200 cm	200 cm
Nominal voltage (V)	48 V	48 V	48 V	48 V
Max. current (A)	16 A max.	16 A max.	16 A max.	16 A max.
Colour	● black	○ white	● black	○ white
Material	Aluminium	Aluminium	Aluminium	Aluminium
L x W x H (cm)	100 cm × 2.6 cm × 4.7 cm	100 cm × 2.6 cm × 4.7 cm	200 cm × 2.6 cm × 4.7 cm	200 cm × 2.6 cm × 4.7 cm
Prod. no.	**1006549**	**1006550**	**1006551**	**1006552**
GBP	**52.00**	**52.00**	**105.00**	**105.00**

	300 cm	300 cm	400 cm	400 cm
Nominal voltage (V)	48 V	48 V	48 V	48 V
Max. current (A)	16 A max.	16 A max.	16 A max.	16 A max.
Colour	● black	○ white	● black	○ white
Material	Aluminium	Aluminium	Aluminium	Aluminium
L x W x H (cm)	300 cm × 2.6 cm × 4.7 cm	300 cm × 2.6 cm × 4.7 cm	400 cm × 2.6 cm × 4.7 cm	400 cm × 2.6 cm × 4.7 cm
Prod. no.	**1006553**	**1006554**	**1006555**	**1006556**
GBP	**151.00**	**151.00**	**201.00**	**201.00**

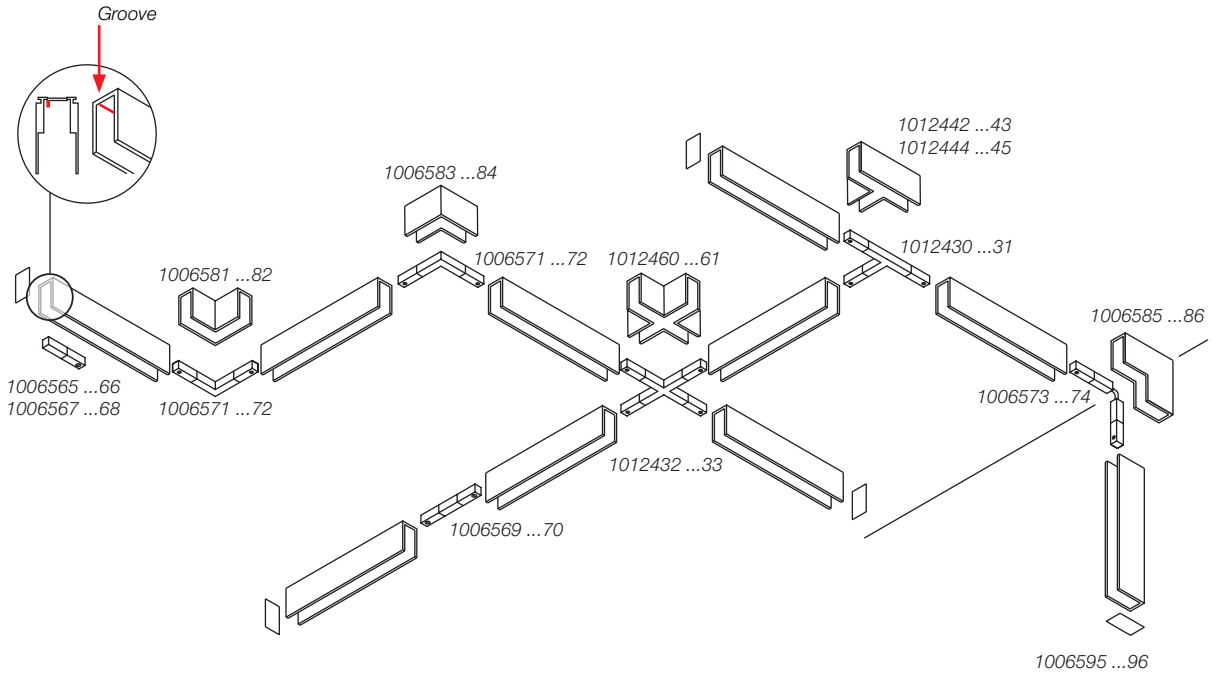
Groove
1012442 ...43
1012444 ...45
1006583 ...84
1012430 ...31
1006581 ...82
1006571 ...72
1012460 ...61
1006585 ...86
1006565 ...66
1006567 ...68
1006571 ...72
1006573 ...74
1012432 ...33
1006569 ...70
1006595 ...96

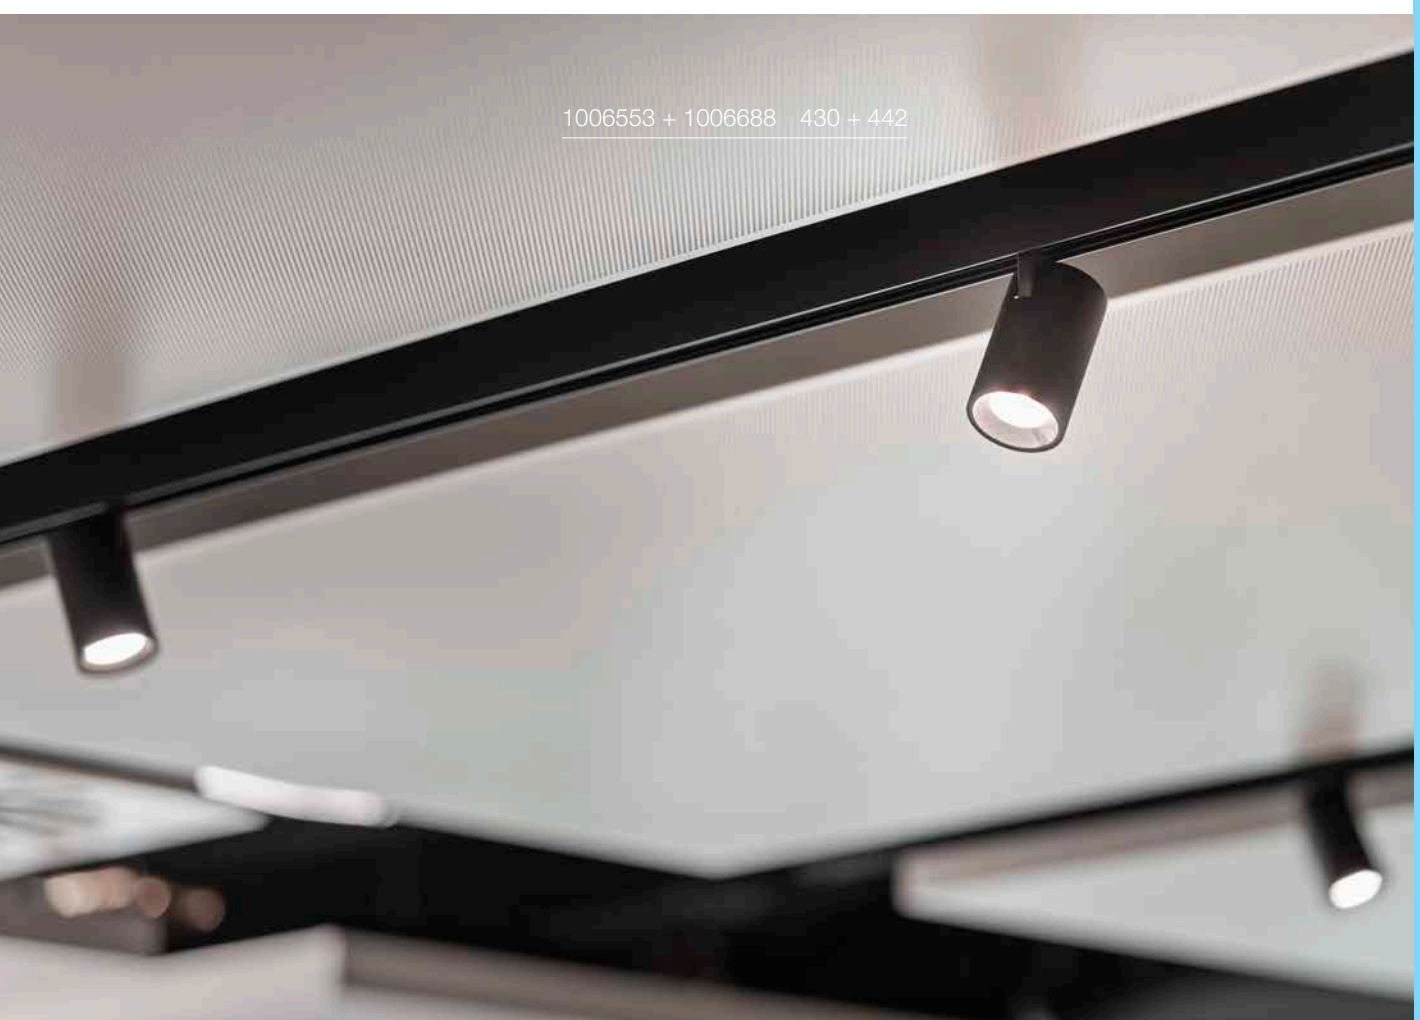
1006553 + 1006688 430 + 442



END FEED, LEFT

9.7 cm | Polycarbonate (PC)
L: 9.7 cm | W: 1.6 cm | H: 1.9 cm

● black	Prod. no.	**1006565**	**13.00 GBP**
○ white	Prod. no.	**1006566**	**13.00 GBP**



END FEED, RIGHT

9.7 cm | Polycarbonate (PC)
L: 9.7 cm | W: 1.6 cm | H: 1.9 cm

● black	Prod. no.	**1006567**	**13.00 GBP**
○ white	Prod. no.	**1006568**	**13.00 GBP**



MECHANICAL L-CONNECTOR FOR DEEP SURFACE-MOUNTED TRACK, LEFT (FOR CEILING INSTALLATION)

7.1 cm | Aluminium
L: 7.1 cm | W: 7.1 cm | H: 4.7 cm

● black	Prod. no.	**1006581**	**26.00 GBP**
○ white	Prod. no.	**1006582**	**26.00 GBP**



MECHANICAL L-CONNECTOR FOR DEEP SURFACE-MOUNTED TRACK, RIGHT (FOR CEILING INSTALLATION)

7.1 cm | Aluminium
L: 7.1 cm | W: 7.1 cm | H: 4.7 cm

● black	Prod. no.	**1006583**	**26.00 GBP**
○ white	Prod. no.	**1006584**	**26.00 GBP**



MECHANICAL L-CONNECTOR FOR SURFACE-MOUNTED TRACK, DEEP, STEREO (WALL/CEILING)

8.4 cm | Aluminium
L: 8.4 cm | W: 8.4 cm | H: 4.7 cm

● black	Prod. no.	**1006585**	**26.00 GBP**
○ white	Prod. no.	**1006586**	**26.00 GBP**



ELECTRICAL L-CONNECTOR, DALI

11.4 cm | Polycarbonate (PC)
L: 11.4 cm, W: 11.4 cm, H: 1.9 cm

● black	Prod. no.	**1006571**	**25.00 GBP**
○ white	Prod. no.	**1006572**	**25.00 GBP**



T-CONNECTOR, MECHANICAL, FOR SURFACE-MOUNTED DEEP TRACK, LEFT 1

7.4 cm | Aluminium
W: 7.4 cm | H: 4.7 cm

● black	Prod. no.	**1012442**	**42.00 GBP**
○ white	Prod. no.	**1012443**	**42.00 GBP**



T-CONNECTOR, MECHANICAL, FOR SURFACE-MOUNTED DEEP TRACK, LEFT 2

7.4 cm | Aluminium
W: 7.4 cm | H: 4.7 cm

● black	Prod. no.	**1012444**	**42.00 GBP**
○ white	Prod. no.	**1012445**	**42.00 GBP**



T-CONNECTOR, MECHANICAL, FOR SURFACE-MOUNTED DEEP TRACK, RIGHT 1

7.4 cm | Aluminium
W: 7.4 cm | H: 4.7 cm

● black	Prod. no.	**1012446**	**42.00 GBP**
○ white	Prod. no.	**1012447**	**42.00 GBP**



T-CONNECTOR, MECHANICAL, FOR SURFACE-MOUNTED DEEP TRACK, RIGHT 2

7.4 cm | Aluminium
W: 7.4 cm | H: 4.7 cm

● black	Prod. no.	**1012448**	**42.00 GBP**
○ white	Prod. no.	**1012449**	**42.00 GBP**



ELECTRICAL T-CONNECTOR, DALI

13.3 cm
L: 13.3 cm | W: 7.5 cm | H: 1.8 cm

● black	Prod. no.	**1012430**	**39.00 GBP**
○ white	Prod. no.	**1012431**	**39.00 GBP**



X-CONNECTOR, MECHANICAL, FOR SURFACE-MOUNTED DEEP TRACK

7.4 cm
L: 7.4 cm | W: 7.4 cm | H: 4.7 cm

● black	Prod. no.	**1012460**	**51.00 GBP**
○ white	Prod. no.	**1012461**	**51.00 GBP**



ELECTRICAL X-CONNECTOR, DALI

133 cm | Plastic PC
L: 133 cm | W: 13.3 cm | H: 1.8 cm

● black	Prod. no.	**1012432**	**48.00 GBP**
○ white	Prod. no.	**1012433**	**48.00 GBP**



Electrical longitudinal connector, DALI

14.4 cm | Polycarbonate (PC)
L: 14.4 cm | W: 1.6 cm | H: 1.9 cm

● black	Prod. no.	**1006569**	**20.00 GBP**
○ white	Prod. no.	**1006570**	**20.00 GBP**



FLEXIBLE CONNECTOR, ELECTRICAL, DALI

23 cm | Polycarbonate (PC)
L: 23 cm | W: 1.6 cm | H: 1.9 cm

● black	Prod. no.	**1006573**	**26.00 GBP**
○ white	Prod. no.	**1006574**	**26.00 GBP**



EXTERNAL POWER ADAPTER 48 V | 60 W

18 cm | Polycarbonate (PC)
L: 18 cm | W: 4.5 cm | H: 2.7 cm

○ white	Prod. no.	**1006613**	**52.00 GBP**



EXTERNAL POWER ADAPTER 48 V | 150 W

19.1 cm | Metal/Polycarbonate (PC)
L: 19.1 cm | W: 8.8 cm | H: 3.6 cm

● black	Prod. no.	**1006614**	**113.00 GBP**



TRACK COVER, 26 MM, FOR DEEP AND RECESSED SURFACE-MOUNTED TRACK, 2 M

200 cm | Polycarbonate (PC)
L: 200 cm | W: 26 cm | H: 6 cm

● black	Prod. no.	**1007188**	**11.00 GBP**
○ white	Prod. no.	**1007189**	**11.00 GBP**



END CAP FOR DEEP SURFACE-MOUNTED TRACK

2.6 cm | Polycarbonate (PC)
L: 2.6 cm | W: 0.2 cm | H: 4.7 cm

● black	Prod. no.	**1006595**	**6.00 GBP**
○ white	Prod. no.	**1006596**	**6.00 GBP**



TRACK REINFORCEMENT PLATE FOR SURFACE-MOUNTED TRACK

5 cm | Steel
L: 5 cm | W: 1.3 cm | H: 0.3 cm

● grey	Prod. no.	**1006609**	**8.00 GBP**



TRACK REINFORCEMENT PLATE WITH MOUNTING SET, 3M WIRE ROPE

12 cm | Steel
L: 12 cm | W: 2.7 cm

● black	Prod. no.	**1006603**	**20.00 GBP**
○ white	Prod. no.	**1006604**	**20.00 GBP**



TRACK REINFORCEMENT PLATE WITH MOUNTING SET, 1M ROD

12 cm | Steel
L: 12 cm | W: 2.7 cm

● black	Prod. no.	**1006601**	**20.00 GBP**
○ white	Prod. no.	**1006602**	**20.00 GBP**



PENDANT SUSPENSION, 1M ROD

steel
W: 2.9 cm

● black	Prod. no.	**1006605**	**16.00 GBP**
○ white	Prod. no.	**1006606**	**16.00 GBP**



PENDANT SUSPENSION, 3M WIRE ROPE

steel
W: 2.9 cm

● black	Prod. no.	**1006607**	**16.00 GBP**
○ white	Prod. no.	**1006608**	**16.00 GBP**



MOUNTING BRACKET

3 cm | Aluminium
L: 3 cm | W: 2.7 cm | H: 1.1 cm

● black	Prod. no.	**1006599**	**7.00 GBP**
○ white	Prod. no.	**1006600**	**7.00 GBP**



INCLUDES CASAMBI TO DALI CONVERTER

28 cm | Plastic PC
L: 28 cm | W: 2.3 cm | H: 4.4 cm
The integrated Casambi-to-DALI module enables wireless control via the Casambi app and Casambi smart controllers.

● black	Prod. no.	**1008382**	**343.00 GBP**
○ white	Prod. no.	**1008383**	**343.00 GBP**



ON/OFF

28 cm | Plastic PC
L: 28 cm | W: 2.3 cm | H: 4.4 cm

● black	Prod. no.	**1007874**	**163.00 GBP**
○ white	Prod. no.	**1007875**	**163.00 GBP**



INCLUDES DALI THROUGH-WIRING

29.8 cm | Plastic PC
L: 29.8 cm | W: 1.6 cm | H: 1.9 cm

● black	Prod. no.	**1010446**	**93.00 GBP**
○ white	Prod. no.	**1010447**	**93.00 GBP**



INCLUDES DALI THROUGH-WIRING


26.8 cm | Polycarbonate (PC)
L: 26.8 cm | W: 2.2 cm | H: 4.4 cm

● black	Prod. no.	**1009012**	**119.00 GBP**
○ white	Prod. no.	**1009001**	**119.00 GBP**

48V SYSTEM TRACK
RECESSED TRACK, DALI







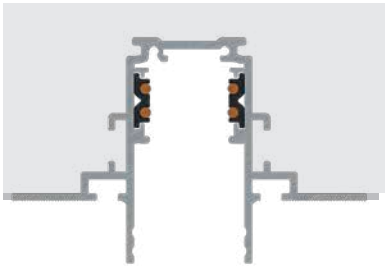

	100 cm	100 cm	200 cm	200 cm
Nominal voltage (V)	48 V	48 V	48 V	48 V
Max. current (A)	16 A max.	16 A max.	16 A max.	16 A max.
Colour	● black	○ white	● black	○ white
Material	Aluminium	Aluminium	Aluminium	Aluminium
L x W x H (cm)	100 cm x 7.4 cm x 4.7 cm	100 cm x 7.4 cm x 4.7 cm	200 cm x 7.4 cm x 4.7 cm	200 cm x 7.4 cm x 4.7 cm
Prod. no.	**1006557**	**1006558**	**1006559**	**1006560**
GBP	**70.00**	**70.00**	**121.00**	**121.00**

	300 cm	300 cm	400 cm	400 cm
Nominal voltage (V)	48 V	48 V	48 V	48 V
Max. current (A)	16 A max.	16 A max.	16 A max.	16 A max.
Colour	● black	○ white	● black	○ white
Material	Aluminium	Aluminium	Aluminium	Aluminium
L x W x H (cm)	300 cm x 7.4 cm x 4.7 cm	300 cm x 7.4 cm x 4.7 cm	400 cm x 7.4 cm x 4.7 cm	400 cm x 7.4 cm x 4.7 cm
Prod. no.	**1006561**	**1006562**	**1006563**	**1006564**
GBP	**159.00**	**159.00**	**226.00**	**226.00**

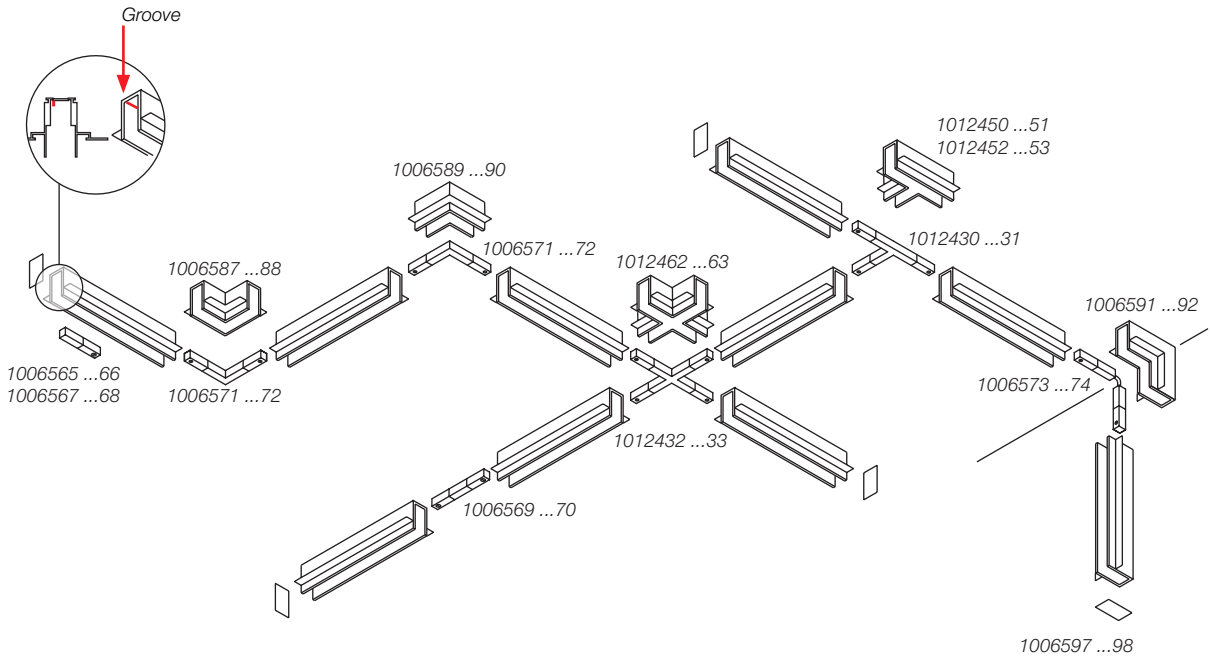
Groove
1012450 ...51
1012452 ...53
1006589 ...90
1012430 ...31
1006587 ...88
1006571 ...72
1012462 ...63
1006591 ...92
1006565 ...66
1006567 ...68
1006571 ...72
1006573 ...74
1012432 ...33
1006569 ...70
1006597 ...98

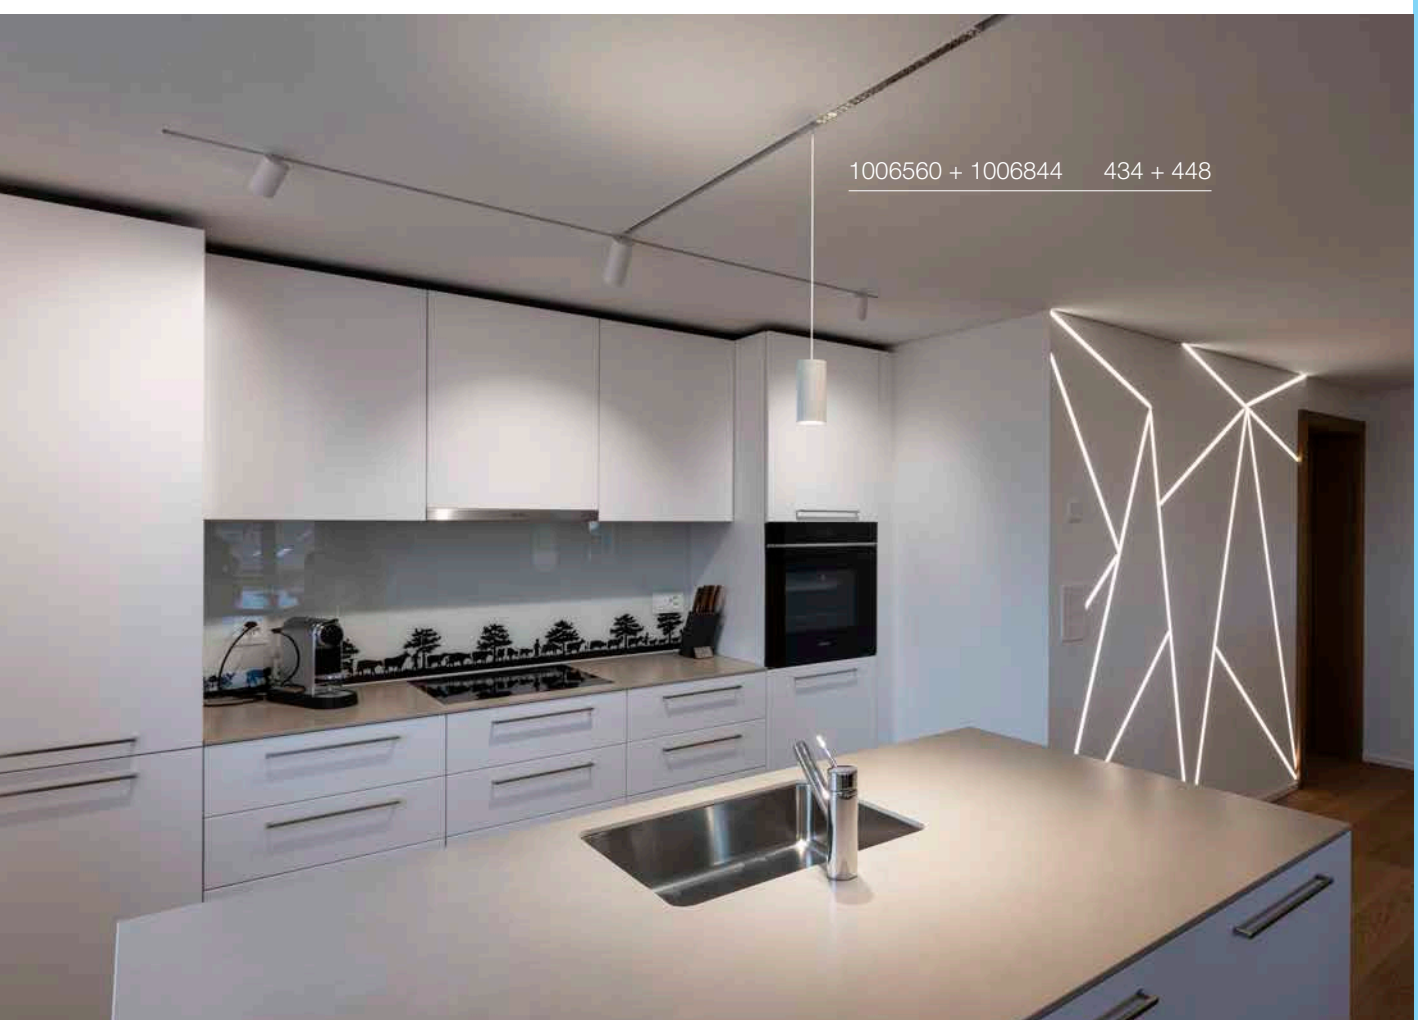
1006560 + 1006844 434 + 448



END FEED, LEFT

9.7 cm | Polycarbonate (PC)
L: 9.7 cm | W: 1.6 cm | H: 1.9 cm

● black	Prod. no.	**1006565**	**13.00 GBP**
○ white	Prod. no.	**1006566**	**13.00 GBP**



END FEED, RIGHT

9.7 cm | Polycarbonate (PC)
L: 9.7 cm | W: 1.6 cm | H: 1.9 cm

● black	Prod. no.	**1006567**	**13.00 GBP**
○ white	Prod. no.	**1006568**	**13.00 GBP**



MECHANICAL L-CONNECTOR FOR DEEP SURFACE-MOUNTED TRACK, LEFT (FOR CEILING INSTALLATION)

9.5 cm | Aluminium
L: 9.5 cm | W: 9.5 cm | H: 4.7 cm

● black	Prod. no.	**1006587**	**29.00 GBP**
○ white	Prod. no.	**1006588**	**29.00 GBP**



MECHANICAL L-CONNECTOR FOR DEEP SURFACE-MOUNTED TRACK, RIGHT (FOR CEILING INSTALLATION)

9.5 cm | Aluminium
L: 9.5 cm | W: 9.5 cm | H: 4.7 cm

● black	Prod. no.	**1006589**	**29.00 GBP**
○ white	Prod. no.	**1006590**	**29.00 GBP**



L-CONNECTOR MECHANICAL, FOR RECESSED TRACK, DEEP, STEREO, (WALL/CEILING)

8.1 cm | Aluminium
L: 8.1 cm | W: 7.4 cm | H: 8.1 cm


● black	Prod. no.	**1006591**	**29.00 GBP**
○ white	Prod. no.	**1006592**	**29.00 GBP**



ELECTRICAL L-CONNECTOR, DALI

11.4 cm | Polycarbonate (PC)
L: 11.4 cm, W: 11.4 cm, H: 1.9 cm


● black	Prod. no.	**1006571**	**25.00 GBP**
○ white	Prod. no.	**1006572**	**25.00 GBP**



T-CONNECTOR, MECHANICAL, FOR RECESSED DEEP TRACK, LEFT 1

7.4 cm | Aluminium
L: 7.4 cm | W: 7.4 cm | H: 4.6 cm


● black	Prod. no.	**1012450**	**51.00 GBP**
○ white	Prod. no.	**1012451**	**51.00 GBP**



T-CONNECTOR, MECHANICAL, FOR RECESSED DEEP TRACK, LEFT 2

7.4 cm | Aluminium
L: 7.4 cm | W: 7.4 cm | H: 4.7 cm


● black	Prod. no.	**1012452**	**51.00 GBP**
○ white	Prod. no.	**1012453**	**51.00 GBP**



T-CONNECTOR, MECHANICAL, FOR RECESSED DEEP TRACK, RIGHT 1

7.4 cm | Aluminium
L: 7.4 cm | W: 74 cm | H: 472 cm

● black	Prod. no.	**1012454**	**51.00 GBP**
○ white	Prod. no.	**1012455**	**51.00 GBP**



T-CONNECTOR, MECHANICAL, FOR RECESSED DEEP TRACK, RIGHT 2

7.4 cm | Aluminium
L: 7.4 cm | W: 74 cm | H: 472 cm

● black	Prod. no.	**1012456**	**51.00 GBP**
○ white	Prod. no.	**1012457**	**51.00 GBP**



ELECTRICAL T-CONNECTOR, DALI

13.3 cm
L: 13.3 cm | W: 7.5 cm | H: 1.8 cm

● black	Prod. no.	**1012430**	**39.00 GBP**
○ white	Prod. no.	**1012431**	**39.00 GBP**



X-CONNECTOR, MECHANICAL, FOR RECESSED DEEP TRACK

7.4 cm | Aluminium
L: 7.4 cm | W: 7.4 cm | H: 4.7 cm

● black	Prod. no.	**1012462**	**59.00 GBP**
○ white	Prod. no.	**1012463**	**59.00 GBP**



ELECTRICAL X-CONNECTOR, DALI

133 cm | Plastic PC
L: 133 cm | W: 13.3 cm | H: 1.8 cm

●	black	Prod. no.	**1012432**	**48.00 GBP**
○	white	Prod. no.	**1012433**	**48.00 GBP**



ELECTRICAL LONGITUDINAL CONNECTOR, DALI

14.4 cm | Polycarbonate (PC)
L: 14.4 cm | W: 1.6 cm | H: 1.9 cm

●	black	Prod. no.	**1006569**	**20.00 GBP**
○	white	Prod. no.	**1006570**	**20.00 GBP**



FLEXIBLE CONNECTOR, ELECTRICAL, DALI

23 cm | Polycarbonate (PC)
L: 23 cm | W: 1.6 cm | H: 1.9 cm

●	black	Prod. no.	**1006573**	**26.00 GBP**
○	white	Prod. no.	**1006574**	**26.00 GBP**



EXTERNAL POWER ADAPTER 48 V | 60 W

18 cm | Polycarbonate (PC)
L: 18 cm | W: 4.5 cm | H: 2.7 cm

○	white	Prod. no.	**1006613**	**52.00 GBP**



EXTERNAL POWER ADAPTER 48 V | 150 W

19.1 cm | Metal/Polycarbonate (PC)
L: 19.1 cm | W: 8.8 cm | H: 3.6 cm

●	black	Prod. no.	**1006614**	**113.00 GBP**



TRACK COVER, 26 MM, FOR DEEP AND RECESSED SURFACE-MOUNTED TRACK, 2 M

200 cm | Polycarbonate (PC)
L: 200 cm | W: 26 cm | H: 6 cm

●	black	Prod. no.	**1007188**	**11.00 GBP**
○	white	Prod. no.	**1007189**	**11.00 GBP**



END CAP FOR RECESSED TRACK

3.4 cm | Polycarbonate (PC)
L: 3.4 cm | W: 0.2 cm | H: 4.7 cm

●	black	Prod. no.	**1006597**	**4.00 GBP**
○	white	Prod. no.	**1006598**	**4.00 GBP**



TRACK REINFORCEMENT PLATES SET FOR RECESSED TRACK

6.3 cm | Steel
L: 6.3 cm | W: 0.8 cm | H: 0.3 cm


●	grey	Prod. no.	**1006610**	**8.00 GBP**



INCLUDES CASAMBI TO DALI CONVERTER

28 cm | Plastic PC
L: 28 cm | W: 2.3 cm | H: 4.4 cm
The integrated Casambi-to-DALI module enables wireless control via the Casambi app and Casambi smart controllers.

●	black	Prod. no.	**1008382**	**343.00 GBP**
○	white	Prod. no.	**1008383**	**343.00 GBP**



ON/OFF

28 cm | Plastic PC
L: 28 cm | W: 2.3 cm | H: 4.4 cm

●	black	Prod. no.	**1007874**	**163.00 GBP**
○	white	Prod. no.	**1007875**	**163.00 GBP**



INCLUDES DALI THROUGH-WIRING

29.8 cm | Plastic PC
L: 29.8 cm | W: 1.6 cm | H: 1.9 cm

●	black	Prod. no.	**1010446**	**93.00 GBP**
○	white	Prod. no.	**1010447**	**93.00 GBP**



INCLUDES DALI THROUGH-WIRING


26.8 cm | Polycarbonate (PC)
L: 26.8 cm | W: 2.2 cm | H: 4.4 cm

●	black	Prod. no.	**1009012**	**119.00 GBP**
○	white	Prod. no.	**1009001**	**119.00 GBP**


MUSSO

KALU 2.0
48V, DALI, STANDARD SURFACE MOUNTED TRACK







48 V | 250 mA
Total wattage: 9 W
Material: aluminium

- Compatible only with the standard 48 V surface-mounted track
- BEG-eligible
- Discover more lenses and decorative rings in the accessories section


LED INSIDE CRI 90

1010255 **1010257**	Down	3000 K / 1450 lm
1010252 **1010254**	Down	2700 K / 1400 lm

Variant	Prod. no.	GBP
● black 1400 lm|2700 K	**1010252**	**151.00**
● black 1450 lm|3000 K	**1010255**	**151.00**
○ white 1400 lm|2700 K	**1010254**	**151.00**
○ white 1450 lm|3000 K	**1010257**	**151.00**

LIGHT EYE® 2.0
48V, DALI, Ø 7,5 CM







48 V | 250 mA
Total wattage: 10 W
Material: aluminium


LED INSIDE CRI 90

1010458 **1010459**	Down	3000 K / 1200 lm
1010456 **1010457**	Down	2700 K / 1150 lm

Variant	Prod. no.	GBP
● black 1150 lm|2700 K	**1010456**	**134.00**
● black 1200 lm|3000 K	**1010458**	**134.00**
◐ white/black 1150 lm|2700 K	**1010457**	**134.00**
◐ white/black 1200 lm|3000 K	**1010459**	**134.00**

LIGHT EYE® 2.0
48V, PD, DALI, Ø 7,5 CM







48 V | 250 mA
Total wattage: 10 W
Material: aluminium

- With easily adjustable cable length thanks to the quick-connect coupling

LED INSIDE CRI 90


1010462 **1010463**	Down	3000 K / 1200 lm
1010460 **1010461**	Down	2700 K / 1150 lm

Variant	Prod. no.	GBP
● black 1150 lm|2700 K	**1010460**	**147.00**
● black 1200 lm|3000 K	**1010462**	**147.00**
◐ white/black 1150 lm|2700 K	**1010461**	**147.00**
◐ white/black 1200 lm|3000 K	**1010463**	**147.00**


1010336 441

DYSKO
48V, DALI, STANDARD SURFACE MOUNTED TRACK





Dali IP20 IK02 36° 360° 90° 50000h L80B10

48 V | 150 mA
Total wattage: 5.6 W
Material: Plastic PC/Aluminium

- Compatible only with the standard 48 V surface-mounted track


LED INSIDE CRI 90

2700 K
750 lm

Variant	Prod. no.	GBP
black	1010332	163.00
black/gold	1010330	163.00
white/black	1010331	163.00

DYSKO
48V, DALI, DEEP & RECESSED TRACK





Dali IP20 IK02 36° 360° 90° 50000h L80B10


48 V | 150 mA
Total wattage: 5.6 W
Material: Plastic PC/Aluminium


LED INSIDE CRI 90

2700 K
750 lm

Variant	Prod. no.	GBP
black	1010377	163.00
black/gold	1010375	163.00
white/black	1010376	163.00

DYSKO
48V, PD, DALI

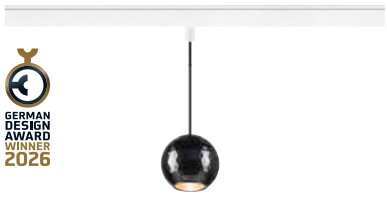



Dali IP20 IK02 36° 50000h L80B10 200 cm

48 V | 150 mA
Total wattage: 5.6 W
Material: Plastic PC/Aluminium


LED INSIDE CRI 90

2700 K
750 lm

Variant	Prod. no.	GBP
black	1010338	172.00
black/gold	1010336	169.00
white/black	1010337	169.00

NUMINOS® XS
48V, DALI






IP20 IK02 350° 90° 50000h L80B50 LED INSIDE

CRI 90

48 V | 200 mA
Total wattage: 8.7 W
Material: aluminium/polycarbonate (PC)



● black



● black



○ white




◑ chrome

Variant	GBP
All XS versions	**151.00**

⊕

Product	Prod. no.	GBP
Elliptical diffuser		
○ transparent	**1005612**	**5.00**
Prismatic diffuser		
○ transparent	**1005613**	**5.00**
Frosted diffuser		
○ frosted	**1005614**	**5.00**
Honeycomb diffuser		
● black	**1005615**	**8.00**



○ white



● black



○ white




◑ chrome

		640 lm	20°	16	**1006651**	
	2700 K	620 lm	40°	22	**1006654**	
		640 lm	55°	25	**1006657**	
		700 lm	20°	16	**1006669**	
Dali	3000 K	670 lm	40°	22	**1006672**	
		690 lm	55°	25	**1006675**	
		720 lm	20°	16	**1006687**	
	4000 K	700 lm	40°	22	**1006690**	
		710 lm	55°	25	**1006693**	
		670 lm	20°	16	**1006652**	
	2700 K	650 lm	40°	22	**1006655**	
		670 lm	55°	25	**1006658**	
		730 lm	20°	16	**1006670**	
Dali	3000 K	700 lm	40°	22	**1006673**	
		720 lm	55°	25	**1006676**	
		750 lm	20°	16	**1006688**	
	4000 K	730 lm	40°	22	**1006691**	
		740 lm	55°	25	**1006694**	
		670 lm	20°	16	**1006653**	
	2700 K	650 lm	40°	22	**1006656**	
		670 lm	55°	25	**1006659**	
		730 lm	20°	16	**1006671**	
Dali	3000 K	700 lm	40°	22	**1006674**	
		720 lm	55°	25	**1006677**	
		750 lm	20°	16	**1006689**	
	4000 K	730 lm	40°	22	**1006692**	
		740 lm	55°	25	**1006695**	
		640 lm	20°	16	**1006660**	
	2700 K	620 lm	40°	22	**1006663**	
		640 lm	55°	25	**1006666**	
		700 lm	20°	16	**1006678**	
Dali	3000 K	670 lm	40°	22	**1006681**	
		690 lm	55°	25	**1006684**	
		720 lm	20°	16	**1006696**	
	4000 K	700 lm	40°	22	**1006699**	
		710 lm	55°	25	**1006702**	
		670 lm	20°	16	**1006661**	
	2700 K	650 lm	40°	22	**1006664**	
		670 lm	55°	25	**1006667**	
		730 lm	20°	16	**1006679**	
Dali	3000 K	700 lm	40°	22	**1006682**	
		720 lm	55°	25	**1006685**	
		750 lm	20°	16	**1006697**	
	4000 K	730 lm	40°	22	**1006700**	
		740 lm	55°	25	**1006703**	
		670 lm	20°	16	**1006662**	
	2700 K	650 lm	40°	22	**1006665**	
		670 lm	55°	25	**1006668**	
		730 lm	20°	16	**1006680**	
Dali	3000 K	700 lm	40°	22	**1006683**	
		720 lm	55°	25	**1006686**	
		750 lm	20°	16	**1006698**	
	4000 K	730 lm	40°	22	**1006701**	
		740 lm	55°	25	**1006704**	

NUMINOS® S
48V, DALI






IP20 IK02 350° 90° 50000h L80B50 LED INSIDE

CRI 90

48 V | 350 mA
Total wattage: 16 W
Material: aluminium/polycarbonate (PC)



● black



● black



○ white




◑ chrome

Variant	GBP
All S versions	**159.00**

⊕

Product	Prod. no.	GBP
Elliptical diffuser		
○ transparent	**1004786**	**4.00**
Prismatic diffuser		
○ transparent	**1004787**	**5.00**
Frosted diffuser		
○ frosted	**1004788**	**5.00**
Honeycomb diffuser		
● black	**1004789**	**8.00**



○ white



● black



○ white




◑ chrome

					Prod. no.	
Dali	2700 K	1000 lm	20°	19	**1006705**	
		970 lm	40°	16	**1006708**	
		960 lm	55°	19	**1006711**	
	3000 K	1060 lm	20°	19	**1006723**	
		1030 lm	40°	19	**1006726**	
			55°	22	**1006729**	
	4000 K	1280 lm	20°	22	**1006741**	
		1150 lm	40°	19	**1006744**	
		1130 lm	55°	19	**1006747**	
Dali	2700 K	1020 lm	20°	19	**1006706**	
		1050 lm	40°	19	**1006709**	
		1030 lm	55°	22	**1006712**	
	3000 K	1120 lm	20°	19	**1006724**	
			40°	19	**1006727**	
			55°	22	**1006730**	
	4000 K	1350 lm	20°	22	**1006742**	
		1230 lm	40°	19	**1006745**	
		1220 lm	55°	22	**1006748**	
Dali	2700 K	960 lm	20°	19	**1006707**	
		1000 lm	40°	16	**1006710**	
		980 lm	55°	19	**1006713**	
	3000 K	1050 lm	20°	19	**1006725**	
			40°	19	**1006728**	
			55°	22	**1006731**	
	4000 K	1350 lm	20°	22	**1006743**	
		1200 lm	40°	19	**1006746**	
		1170 lm	55°	22	**1006749**	
Dali	2700 K	1000 lm	20°	19	**1006714**	
		970 lm	40°	16	**1006717**	
		960 lm	55°	19	**1006720**	
	3000 K	1060 lm	20°	19	**1006732**	
		1030 lm	40°	19	**1006735**	
			55°	22	**1006738**	
	4000 K	1280 lm	20°	22	**1006750**	
		1150 lm	40°	19	**1006753**	
		1130 lm	55°	19	**1006756**	
Dali	2700 K	1020 lm	20°	19	**1006715**	
		1050 lm	40°	19	**1006718**	
		1030 lm	55°	22	**1006721**	
	3000 K	1120 lm	20°	19	**1006733**	
			40°	19	**1006736**	
			55°	22	**1006739**	
	4000 K	1350 lm	20°	22	**1006751**	
		1230 lm	40°	19	**1006754**	
		1220 lm	55°	22	**1006757**	
Dali	2700 K	960 lm	20°	19	**1006716**	
		1000 lm	40°	16	**1006719**	
		980 lm	55°	19	**1006722**	
	3000 K	1050 lm	20°	19	**1006734**	
			40°	19	**1006737**	
			55°	22	**1006740**	
	4000 K	1350 lm	20°	22	**1006752**	
		1200 lm	40°	19	**1006755**	
		1170 lm	55°	22	**1006758**	

NUMINOS® XS
48V, DALI





IP20 IK02 50 000 h L80B50 150 cm LED INSIDE CRI 90

48 V | 200 mA
Total wattage: 8.7 W
Material: aluminium/polycarbonate (PC)



● black



● black



○ white




◑ chrome

Variant	GBP
All XS versions	**168.00**

⊕

Product	Prod. no.	GBP
Elliptical diffuser		
○ transparent	**1005612**	**5.00**
Prismatic diffuser		
○ transparent	**1005613**	**5.00**
Frosted diffuser		
○ frosted	**1005614**	**5.00**
Honeycomb diffuser		
● black	**1005615**	**8.00**



○ white



● black



○ white




◑ chrome

					Prod. no.	
Dali	2700 K	640 lm	20°	16	**1006759**	
		620 lm	40°	22	**1006762**	
		640 lm	55°	25	**1006765**	
	3000 K	700 lm	20°	16	**1006777**	
		670 lm	40°	22	**1006780**	
		690 lm	55°	25	**1006783**	
	4000 K	720 lm	20°	16	**1006795**	
		700 lm	40°	22	**1006798**	
		710 lm	55°	25	**1006801**	
Dali	2700 K	670 lm	20°	16	**1006760**	
		650 lm	40°	22	**1006763**	
		670 lm	55°	25	**1006766**	
	3000 K	730 lm	20°	16	**1006778**	
		700 lm	40°	22	**1006781**	
		720 lm	55°	25	**1006784**	
	4000 K	750 lm	20°	16	**1006796**	
		730 lm	40°	22	**1006799**	
		740 lm	55°	25	**1006802**	
Dali	2700 K	670 lm	20°	16	**1006761**	
		650 lm	40°	22	**1006764**	
		670 lm	55°	25	**1006767**	
	3000 K	730 lm	20°	16	**1006779**	
		700 lm	40°	22	**1006782**	
		720 lm	55°	25	**1006785**	
	4000 K	750 lm	20°	16	**1006797**	
		730 lm	40°	22	**1006800**	
		740 lm	55°	25	**1006803**	
Dali	2700 K	640 lm	20°	16	**1006768**	
		620 lm	40°	22	**1006771**	
		640 lm	55°	25	**1006774**	
	3000 K	700 lm	20°	16	**1006786**	
		670 lm	40°	22	**1006789**	
		690 lm	55°	25	**1006792**	
	4000 K	720 lm	20°	16	**1006804**	
		700 lm	40°	22	**1006807**	
		710 lm	55°	25	**1006810**	
Dali	2700 K	670 lm	20°	16	**1006769**	
		650 lm	40°	22	**1006772**	
		670 lm	55°	25	**1006775**	
	3000 K	730 lm	20°	16	**1006787**	
		700 lm	40°	22	**1006790**	
		720 lm	55°	25	**1006793**	
	4000 K	750 lm	20°	16	**1006805**	
		730 lm	40°	22	**1006808**	
		740 lm	55°	25	**1006811**	
Dali	2700 K	670 lm	20°	16	**1006770**	
		650 lm	40°	22	**1006773**	
		670 lm	55°	25	**1006776**	
	3000 K	730 lm	20°	16	**1006788**	
		700 lm	40°	22	**1006791**	
		720 lm	55°	25	**1006794**	
	4000 K	750 lm	20°	16	**1006806**	
		730 lm	40°	22	**1006809**	
		740 lm	55°	25	**1006812**	

NUMINOS® S
48V, DALI





Dali IP20 IK02 20° 50000 h L80B50 150 cm

UGR 19 LED INSIDE CRI 90

48 V | 350 mA
Total wattage: 16 W
Material: aluminium/polycarbonate (PC)

Variant	GBP
All S versions	**176.00**



● black

● black

○ white

● chrome














⊕


Product	Prod. no.	GBP
Elliptical diffuser		
○ transparent	**1004786**	**4.00**
Prismatic diffuser		
○ transparent	**1004787**	**5.00**
Frosted diffuser		
○ frosted	**1004788**	**5.00**
Honeycomb diffuser		
● black	**1004789**	**8.00**



○ white

	2700 K	1000 lm	20°	19	**1006813**	
		970 lm	40°	16	**1006816**	
		960 lm	55°	19	**1006819**	
Dali	3000 K	1060 lm	20°	19	**1006831**	
		1030 lm	40°	19	**1006834**	
			55°	22	**1006837**	
	4000 K	1280 lm	20°	22	**1006849**	
		1150 lm	40°	19	**1006852**	
		1130 lm	55°	19	**1006855**	
	2700 K	1020 lm	20°	19	**1006814**	
		1050 lm	40°	19	**1006817**	
		1030 lm	55°	22	**1006820**	
Dali	3000 K	1120 lm	20°	19	**1006832**	
			40°	19	**1006835**	
			55°	22	**1006838**	
	4000 K	1350 lm	20°	22	**1006850**	
		1230 lm	40°	19	**1006853**	
		1220 lm	55°	22	**1006856**	
	2700 K	960 lm	20°	19	**1006815**	
		1000 lm	40°	16	**1006818**	
		980 lm	55°	19	**1006821**	
Dali	3000 K	1050 lm	20°	19	**1006833**	
			40°	19	**1006836**	
			55°	22	**1006839**	
	4000 K	1350 lm	20°	22	**1006851**	
		1200 lm	40°	19	**1006854**	
		1170 lm	55°	22	**1006857**	
	2700 K	1000 lm	20°	19	**1006822**	
		970 lm	40°	16	**1006825**	
		960 lm	55°	19	**1006828**	
Dali	3000 K	1060 lm	20°	19	**1006840**	
		1030 lm	40°	19	**1006843**	
			55°	22	**1006846**	
	4000 K	1280 lm	20°	22	**1006858**	
		1150 lm	40°	19	**1006861**	
		1130 lm	55°	19	**1006864**	
	2700 K	1020 lm	20°	19	**1006823**	
		1050 lm	40°	19	**1006826**	
		1030 lm	55°	22	**1006829**	
Dali	3000 K	1120 lm	20°	19	**1006841**	
			40°	19	**1006844**	
			55°	22	**1006847**	
	4000 K	1350 lm	20°	22	**1006859**	
		1230 lm	40°	19	**1006862**	
		1220 lm	55°	22	**1006865**	
	2700 K	960 lm	20°	19	**1006824**	
		1000 lm	40°	16	**1006827**	
		980 lm	55°	19	**1006830**	
Dali	3000 K	1050 lm	20°	19	**1006842**	
			40°	19	**1006845**	
			55°	22	**1006848**	
	4000 K	1350 lm	20°	22	**1006860**	
		1200 lm	40°	19	**1006863**	
		1170 lm	55°	22	**1006866**	

IN-LINE 22
48V, OPAL, DALI

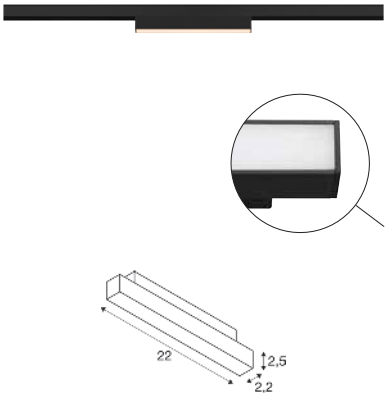


48 V | 350 mA
Total wattage: 7.3 W
Material: aluminium

INSIDE

1006619 **1006620**	Direct	4000 K 680 lm
1006617 **1006618**	Direct	3000 K 570 lm
1006615 **1006616**	Direct	2700 K 540 lm

Variant	Prod. no.	GBP
● black 540 lm | 2700 K	**1006615**	**109.00**
● black 570 lm | 3000 K	**1006617**	**109.00**
● black 680 lm | 4000 K	**1006619**	**109.00**
○ white 540 lm | 2700 K	**1006616**	**109.00**
○ white 570 lm | 3000 K	**1006618**	**109.00**
○ white 680 lm | 4000 K	**1006620**	**109.00**

IN-LINE 22
48V, DARKLIGHT REFLECTOR, DALI

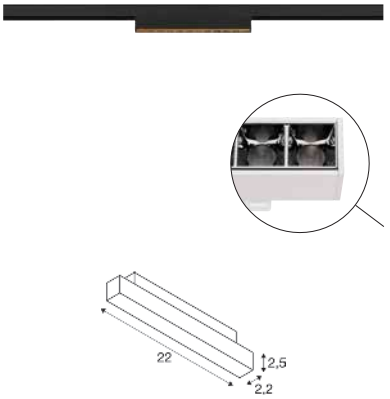


48 V | 350 mA
Total wattage: 7.3 W
Material: aluminium/polycarbonate (PC)

INSIDE

1006631 **1006632**	Direct	4000 K 650 lm
1006629 **1006630**	Direct	3000 K 610 lm
1006627 **1006628**	Direct	2700 K 580 lm

Variant	Prod. no.	GBP
● black 580 lm | 2700 K	**1006627**	**121.00**
● black 610 lm | 3000 K	**1006629**	**121.00**
● black 650 lm | 4000 K	**1006631**	**121.00**
○ white 580 lm | 2700 K	**1006628**	**121.00**
○ white 610 lm | 3000 K	**1006630**	**121.00**
○ white 650 lm | 4000 K	**1006632**	**121.00**

IN-LINE 44
48V, OPAL, DALI

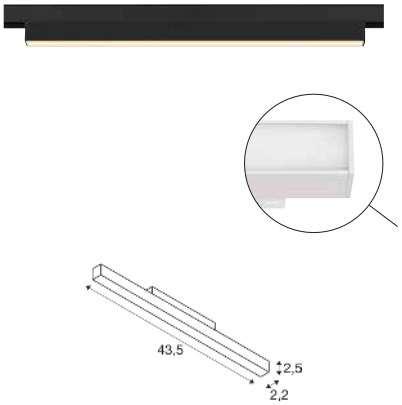

Dali IP20 IK02 95° 50000h L80B50 UGR 28


48 V | 350 mA
Total wattage: 14 W
Material: aluminium/polycarbonate (PC)

LED INSIDE CRI 90

1006625 **1006626**	Direct	4000 K 1450 lm
1006623 **1006624**	Direct	3000 K 1180 lm
1006621 **1006622**	Direct	2700 K 1140 lm

Variant	Prod. no.	GBP
● black 1140 lm | 2700 K	**1006621**	**159.00**
● black 1180 lm | 3000 K	**1006623**	**159.00**
● black 1450 lm | 4000 K	**1006625**	**159.00**
○ white 1140 lm | 2700 K	**1006622**	**159.00**
○ white 1180 lm | 3000 K	**1006624**	**159.00**
○ white 1450 lm | 4000 K	**1006626**	**159.00**

IN-LINE 44
48V, DARKLIGHT REFLECTOR, DALI

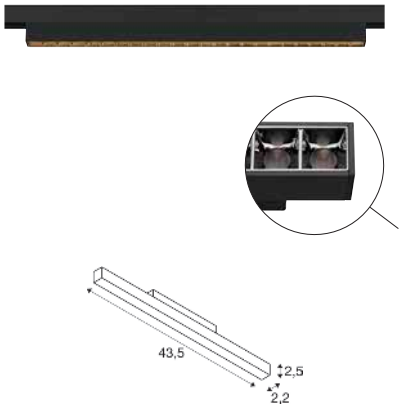

Dali IP20 IK02 35° 50000h L80B50 UGR 16

48 V | 350 mA
Total wattage: 14 W
Material: aluminium/polycarbonate (PC)


LED INSIDE

1006637 **1006638**	Direct	4000 K 1250 lm
1006635 **1006636**	Direct	3000 K 1230 lm
1006633 **1006634**	Direct	2700 K 1180 lm

Variant	Prod. no.	GBP
● black 1180 lm | 2700 K	**1006633**	**172.00**
● black 1230 lm | 3000 K	**1006635**	**172.00**
● black 1250 lm | 4000 K	**1006637**	**172.00**
○ white 1180 lm | 2700 K	**1006634**	**172.00**
○ white 1230 lm | 3000 K	**1006636**	**172.00**
○ white 1250 lm | 4000 K	**1006638**	**172.00**


1006648 453

IN-LINE 24
48V, MOVE, DARKLIGHT REFLECTOR, DALI

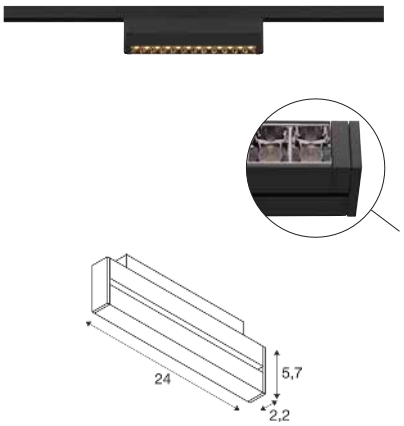

Dali IP20 IK02 35° 180° 50000h L80B50

UGR 16


48 V | 350 mA
Total wattage: 7.3 W
Material: aluminium/polycarbonate (PC)

LED INSIDE

1006643 **1006644**	Direct	4000 K 650 lm
1006641 **1006642**	Direct	3000 K 610 lm
1006639 **1006640**	Direct	2700 K 580 lm

Variant	Prod. no.	GBP
● black 580 lm | 2700 K	**1006639**	**130.00**
● black 610 lm | 3000 K	**1006641**	**130.00**
● black 650 lm | 4000 K	**1006643**	**130.00**
○ white 580 lm | 2700 K	**1006640**	**130.00**
○ white 610 lm | 3000 K	**1006642**	**130.00**
○ white 650 lm | 4000 K	**1006644**	**130.00**

IN-LINE 46
48V, MOVE, DARKLIGHT REFLECTOR, DALI

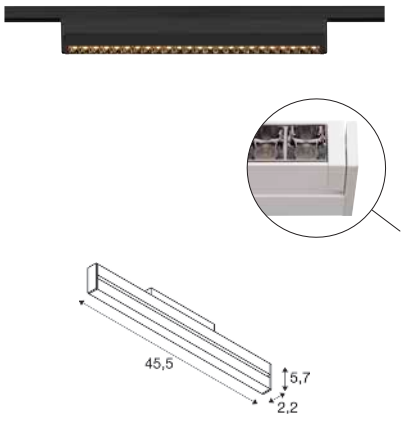

Dali IP20 IK02 35° 180° 50000h L80B50

UGR 16

48 V | 350 mA
Total wattage: 14 W
Material: aluminium/polycarbonate (PC)

LED INSIDE CRI 90


1006649 **1006650**	Direct	4000 K 1250 lm
1006647 **1006648**	Direct	3000 K 1230 lm
1006645 **1006646**	Direct	2700 K 1180 lm

Variant	Prod. no.	GBP
● black 1180 lm | 2700 K	**1006645**	**180.00**
● black 1230 lm | 3000 K	**1006647**	**180.00**
● black 1250 lm | 4000 K	**1006649**	**180.00**
○ white 1180 lm | 2700 K	**1006646**	**180.00**
○ white 1230 lm | 3000 K	**1006648**	**180.00**
○ white 1250 lm | 4000 K	**1006650**	**180.00**



FIX-IT!
48V, DALI, ROUND, STANDARD SURFACE MOUNTED TRACK







48 V | 175 mA
Total wattage: 6.6 W
Material: Aluminium/Plastic PC

- Compatible only with the standard 48 V surface-mounted track
- With black insert as standard



1008949 **1008950** **1008951** **1008952**	Down	3000 K 850 lm
1008945 **1008946** **1008947** **1008948**	Down	2700 K 800 lm


Variant	Prod. no.	GBP
● black 800 lm | 2700 K	**1008946**	**96.00**
● black 850 lm | 3000 K	**1008950**	**96.00**
◑ white/black 800 lm | 2700 K	**1008945**	**96.00**
◑ white/black 850 lm | 3000 K	**1008949**	**96.00**
◑ gold/black 800 lm | 2700 K	**1008947**	**96.00**
◑ gold/black 850 lm | 3000 K	**1008951**	**96.00**
◑ bronze/black 800 lm | 2700 K	**1008948**	**96.00**
◑ bronze/black 850 lm | 3000 K	**1008952**	**96.00**

⊕

Product	Prod. no.	GBP
Round inlay		
● black	**1008994**	**26.00**
○ white	**1008993**	**26.00**
● gold	**1008995**	**26.00**
● bronze	**1008996**	**26.00**

FIX-IT!
48V, DALI, ROUND, STANDARD SURFACE MOUNTED TRACK





Dali | IP20 | 36° | 50 000 h L80B20 | UGR 19

48 V | 350 mA
Total wattage: 7.4 W
Material: Aluminium/Plastic PC

- Compatible only with the standard 48 V surface-mounted track
- With black insert as standard

LED INSIDE | DIM TO WARM | CRI 90

Down	2000 K - 3000 K	
	3 lm - 480 lm	


Variant	Prod. no.	GBP
black	1008954	96.00
white/black	1008953	96.00
gold/black	1008955	96.00
bronze/black	1008956	96.00

⊕

Product	Prod. no.	GBP
Round inlay		
black	1008994	26.00
white	1008993	26.00
gold	1008995	26.00
bronze	1008996	26.00

FIX-IT!
48V, DALI, ROUND, DEEP SURFACE MOUNTED TRACK





Dali | IP20 | 36° | 50 000 h L80B20 | UGR 16

48 V | 175 mA
Total wattage: 6.6 W
Material: Aluminium/Plastic PC

- Compatible only with the deep 48 V surface-mounted track
- With black insert as standard

LED INSIDE | CRI 90

1008961 1008962 1008963 1008964	Down	3000 K 850 lm
1008957 1008958 1008959 1008960	Down	2700 K 800 lm


Variant	Prod. no.	GBP
black 800 lm | 2700 K	1008958	96.00
black 850 lm | 3000 K	1008962	96.00
white/black 800 lm | 2700 K	1008957	96.00
white/black 850 lm | 3000 K	1008961	96.00
gold/black 800 lm | 2700 K	1008959	96.00
gold/black 850 lm | 3000 K	1008963	96.00
bronze/black 800 lm | 2700 K	1008960	96.00
bronze/black 850 lm | 3000 K	1008964	96.00

⊕

Product	Prod. no.	GBP
Round inlay		
black	1008994	26.00
white	1008993	26.00
gold	1008995	26.00
bronze	1008996	26.00

FIX-IT!
48V, DALI, ROUND, DEEP SURFACE MOUNTED TRACK





Dali | IP20 | 36° | 50 000 h L80B20 | UGR 19

48 V | 350 mA
Total wattage: 7.4 W
Material: Aluminium/Plastic PC

- Compatible only with the deep 48 V surface-mounted track
- With black insert as standard


LED INSIDE | DIM TO WARM | CRI 90

Down	2000 K - 3000 K	
	3 lm - 480 lm	

Variant	Prod. no.	GBP
black	1008966	96.00
white/black	1008965	96.00
gold/black	1008967	96.00
bronze/black	1008968	96.00

⊕


Product	Prod. no.	GBP
Round inlay		
black	1008994	26.00
white	1008993	26.00
gold	1008995	26.00
bronze	1008996	26.00

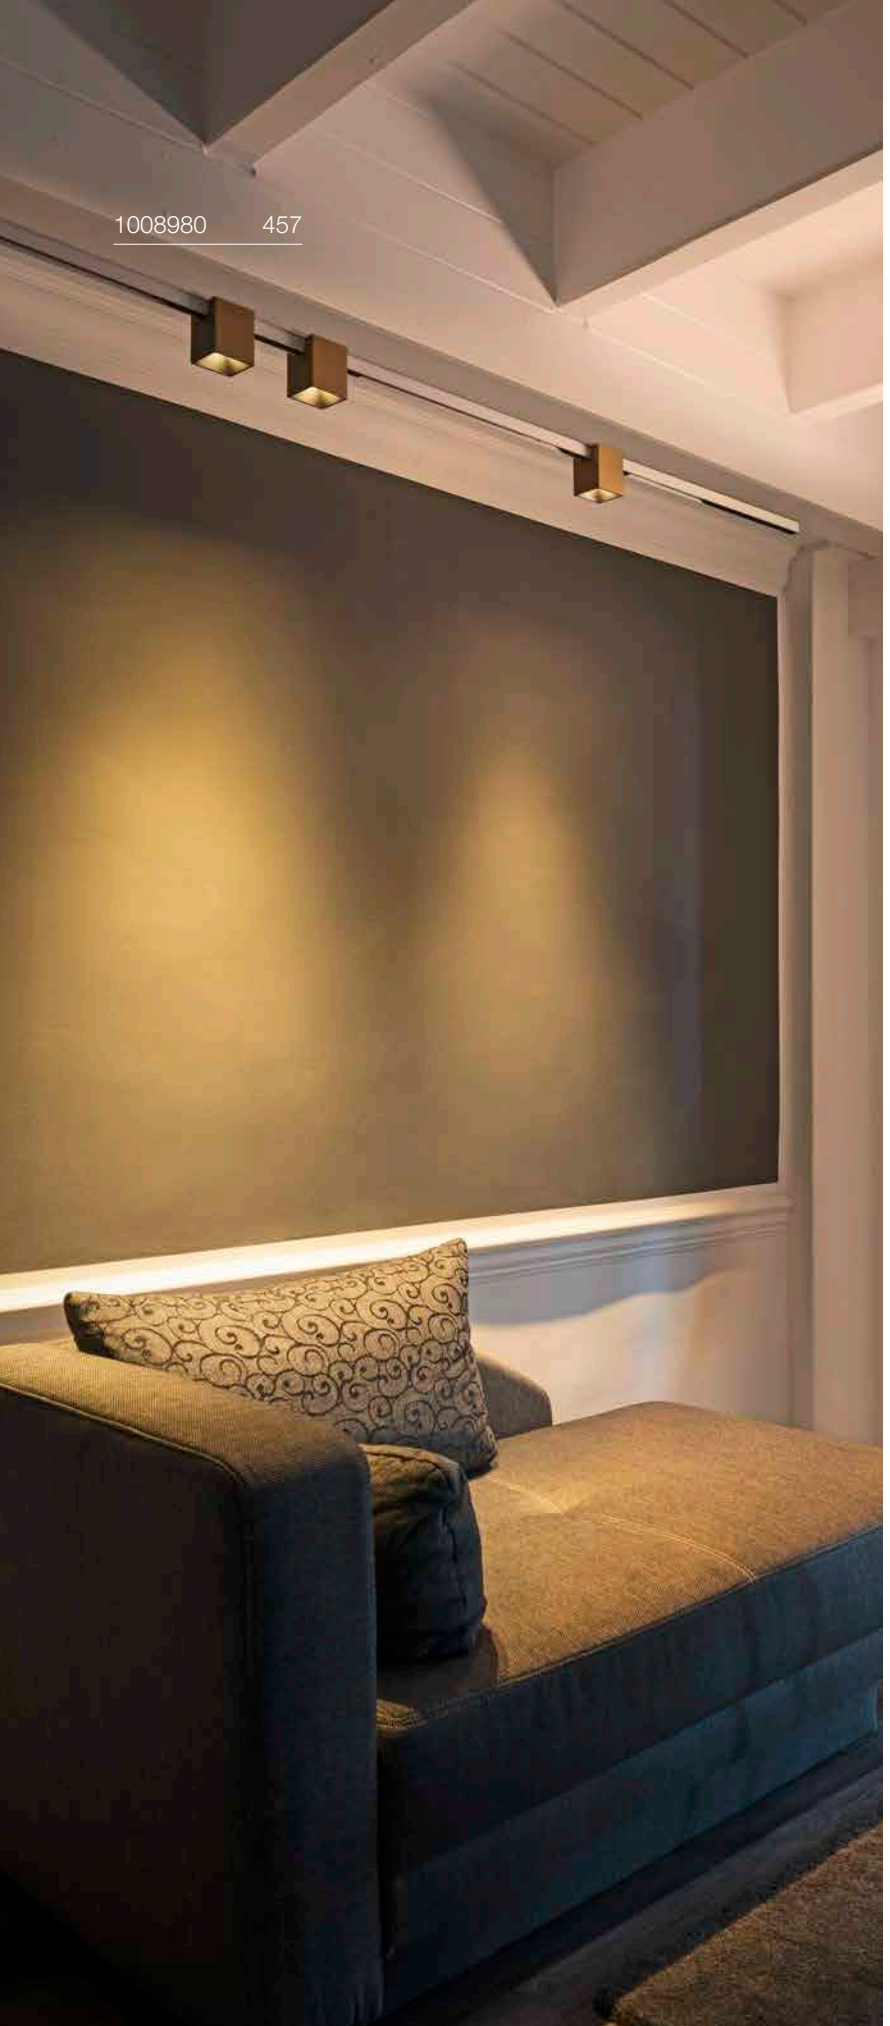

1008980 457

FIX-IT!
48V, DALI, SQUARE, STANDARD SURFACE MOUNTED TRACK







48 V | 175 mA
Total wattage: 6.6 W
Material: Aluminium/Plastic PC

- Compatible only with the standard 48 V surface-mounted track
- With black insert as standard



1008973 **1008974** **1008975** **1008976**	Down	3000 K 865 lm
1008969 **1008970** **1008971** **1008972**	Down	2700 K 800 lm


Variant	Prod. no.	GBP
● black 800 lm | 2700 K	**1008970**	**96.00**
● black 865 lm | 3000 K	**1008974**	**96.00**
◐ white/black 800 lm | 2700 K	**1008969**	**96.00**
◐ white/black 865 lm | 3000 K	**1008973**	**96.00**
◐ gold/black 800 lm | 2700 K	**1008971**	**96.00**
◐ gold/black 865 lm | 3000 K	**1008975**	**96.00**
◐ bronze/black 800 lm | 2700 K	**1008972**	**96.00**
◐ bronze/black 865 lm | 3000 K	**1008976**	**96.00**

⊕

Product	Prod. no.	GBP
Square inlay		
● black	**1008998**	**26.00**
○ white	**1008997**	**26.00**
● gold	**1008999**	**26.00**
● bronze	**1009000**	**26.00**

FIX-IT!
48V, DALI, SQUARE, STANDARD SURFACE MOUNTED TRACK





48 V | 350 mA
Total wattage: 7.4 W
Material: Aluminium/Plastic PC

- Compatible only with the standard 48 V surface-mounted track
- With black insert as standard

LED INSIDE | DIM TO WARM | CRI 90

Down	2000 K - 3000 K	
	3 lm - 495 lm	


Variant	Prod. no.	GBP
black	1008978	96.00
white/black	1008977	96.00
gold/black	1008979	96.00
bronze/black	1008980	96.00

⊕

Product	Prod. no.	GBP
Square inlay		
black	1008998	26.00
white	1008997	26.00
gold	1008999	26.00
bronze	1009000	26.00

FIX-IT!
48V, DALI, SQUARE, DEEP SURFACE MOUNTED TRACK





48 V | 175 mA
Total wattage: 6.6 W
Material: Aluminium/Plastic PC

- Compatible only with the deep 48 V surface-mounted track
- With black insert as standard

LED INSIDE | CRI 90

1008985 1008986 1008987 1008988	Down	3000 K 865 lm
1008981 1008982 1008983 1008984	Down	2700 K 800 lm


Variant	Prod. no.	GBP
black 800 lm | 2700 K	1008982	96.00
black 865 lm | 3000 K	1008986	96.00
white/black 800 lm | 2700 K	1008981	96.00
white/black 865 lm | 3000 K	1008985	96.00
gold/black 800 lm | 2700 K	1008983	96.00
gold/black 865 lm | 3000 K	1008987	96.00
bronze/black 800 lm | 2700 K	1008984	96.00
bronze/black 865 lm | 3000 K	1008988	96.00

⊕

Product	Prod. no.	GBP
Square inlay		
black	1008998	26.00
white	1008997	26.00
gold	1008999	26.00
bronze	1009000	26.00

FIX-IT!
48V, DALI, SQUARE, DEEP SURFACE MOUNTED TRACK





48 V | 350 mA
Total wattage: 7.4 W
Material: Aluminium/Plastic PC

- Compatible only with the deep 48 V surface-mounted track
- With black insert as standard

LED INSIDE | DIM TO WARM | CRI 90

Down	2000 K - 3000 K	
	3 lm - 495 lm	

Variant	Prod. no.	GBP
black	1008990	96.00
white/black	1008989	96.00
gold/black	1008991	96.00
bronze/black	1008992	96.00

⊕

Product	Prod. no.	GBP
Square inlay		
black	1008998	26.00
white	1008997	26.00
gold	1008999	26.00
bronze	1009000	26.00


FRUIT OP JE WERK.NL

GRIP! FLAT
48V, DALI



Dali IP20 340° 90° 50000h L70B50 UGR 15

48 V | 500 mA
Total wattage: 14.5 W
Material: aluminium

- Including colour temperature switch 2700 K/3000 K
- Honeycomb insert included

LED INSIDE CCT CRI 90

	2700 K	3000 K
Down	400 lm	430 lm

Variant	Prod. no.	GBP
black	1009016	239.00
white/black	1009017	239.00

Product	Prod. no.	GBP
GRIP! FLAT, decorative ring		
black	1009102	28.00
white	1009103	28.00
gold	1009104	28.00

GRIP! FLAT
48V, PD, DALI



Dali IP20 50000h L70B50 200 cm UGR 15

48 V | 500 mA
Total wattage: 14.5 W
Material: aluminium

- Including colour temperature switch 2700 K/3000 K
- Honeycomb insert included


LED INSIDE CCT CRI 90

	2700 K	3000 K
Down	400 lm	430 lm

Variant	Prod. no.	GBP
black	1009018	247.00
white/black	1009019	247.00

Product	Prod. no.	GBP
GRIP! FLAT, decorative ring		
black	1009102	28.00
white	1009103	28.00
gold	1009104	28.00
GRIP! FLAT, Felt shade A, anthracite		
anthracite	1010403	121.00
GRIP! FLAT, Felt shade A, grey		
grey	1010404	121.00
GRIP! FLAT, Felt shade A, yellow		
ochre	1010405	121.00
GRIP! FLAT, Felt shade B, anthracite		
anthracite	1010406	88.00
GRIP! FLAT, Felt shade B, grey		
grey	1010407	88.00
GRIP! FLAT, Felt shade B, yellow		
ochre	1010408	88.00


GRIP! FLAT
FELT SHADE Ø 50 CM X 6.2 CM



Ø: 50 cm
H: 6.2 cm


Variant	Prod. no.	GBP
anthracite	1010403	121.00
grey	1010404	121.00
ochre	1010405	121.00

GRIP! FLAT
FELT SHADE Ø 50 CM X 0.6 CM



Ø: 50 cm
H: 0.6 cm

Variant	Prod. no.	GBP
anthracite	1010406	88.00
grey	1010407	88.00
ochre	1010408	88.00

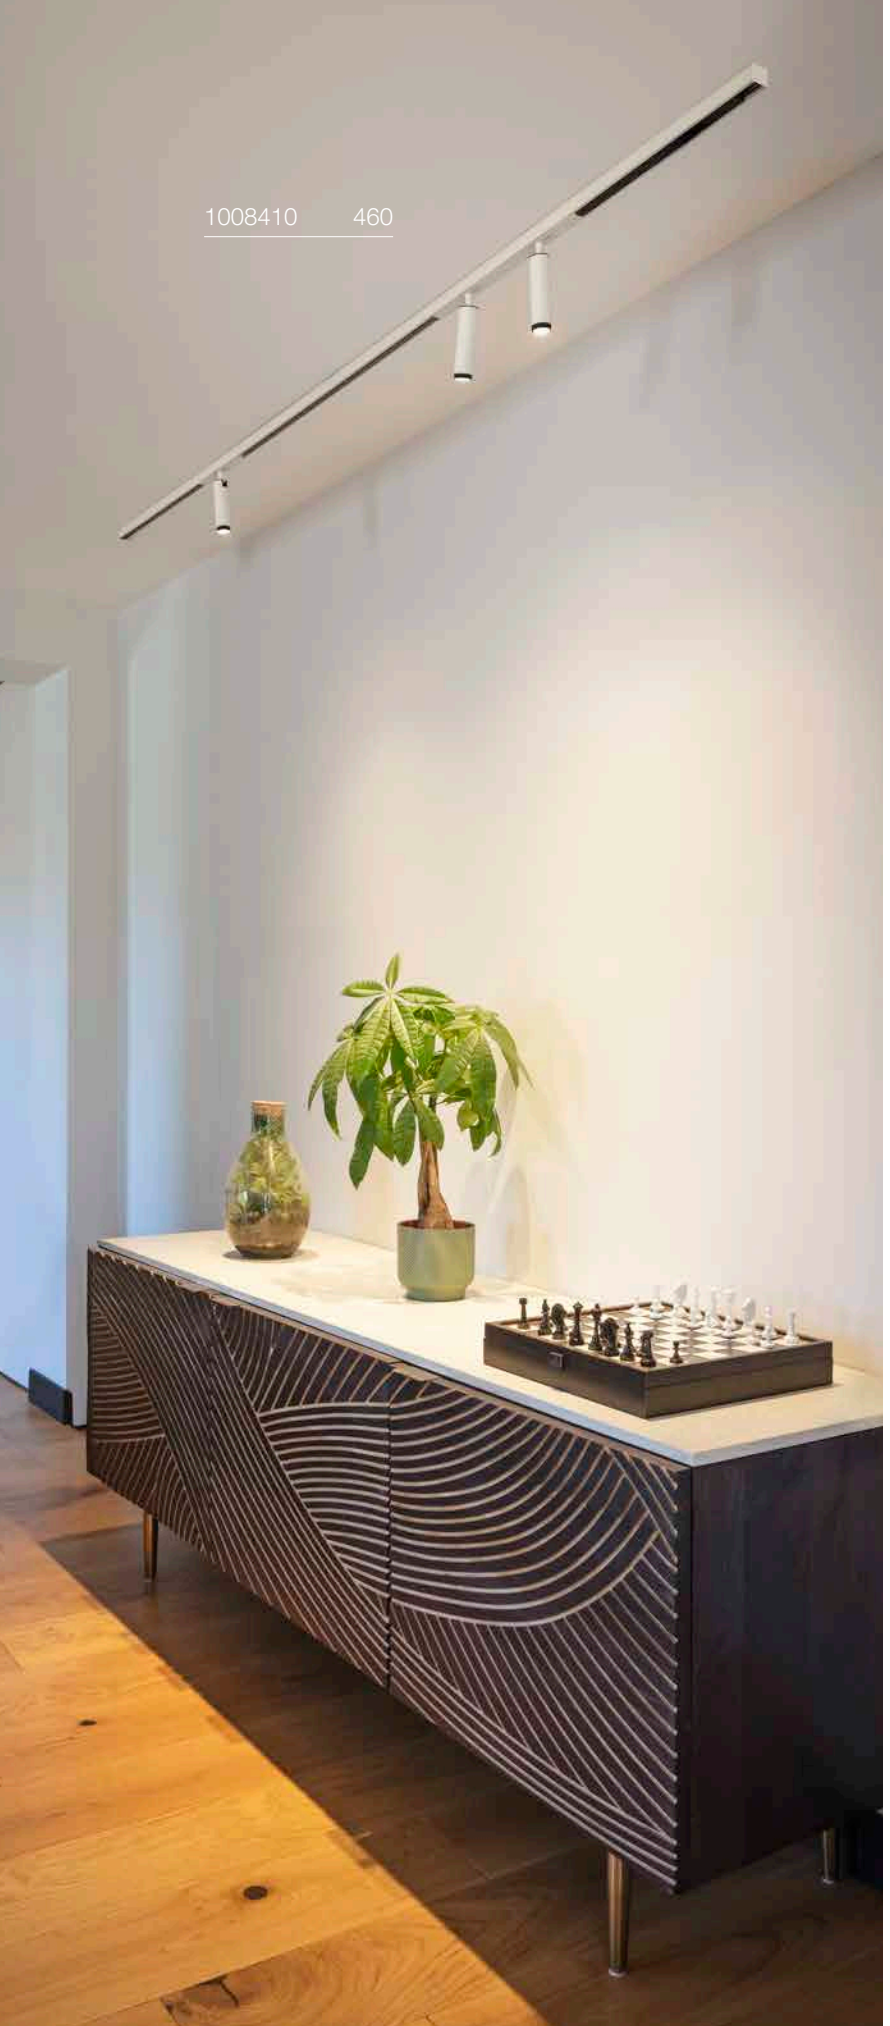


GRIP! S

48V, DALI, STANDARD TRACK, Ø 3.0 CM



GERMAN DESIGN AWARD WINNER 2025



Dali IP20 IK02 29° 340° 90° 50.000 h L80B10 UGR 25

48 V | 250 mA
Total wattage: 9.8 W
Material: aluminium

- Compatible only with the standard 48 V surface-mounted track
- Honeycomb accessories included

LED INSIDE CRI 90

1008410 **1008412** **1008413** **1008414**	Down	3000 K 620 lm
1008405 **1008407** **1008408** **1008409**	Down	2700 K 590 lm

Variant	Prod. no.	GBP
black/gold 590 lm | 2700 K	**1008407**	**147.00**
black/gold 620 lm | 3000 K	**1008412**	**147.00**
white/black 590 lm | 2700 K	**1008405**	**147.00**
white/black 620 lm | 3000 K	**1008410**	**147.00**
gold/black 590 lm | 2700 K	**1008409**	**147.00**
gold/black 620 lm | 3000 K	**1008414**	**147.00**
bronze/black 590 lm | 2700 K	**1008408**	**147.00**
bronze/black 620 lm | 3000 K	**1008413**	**147.00**

⊕

Product	Prod. no.	GBP
GRIP! S, decorative ring		
white	**1011829**	**16.00**
black	**1011830**	**16.00**
nickel	**1011831**	**16.00**
gold	**1011832**	**16.00**
HONEYCOMB + Spacer		
black	**1011837**	**8.00**

GRIP! S
48V, DALI, DEEP & RECESSED TRACK, Ø 3.0 CM



Dali IP20 IK02 29° 340° 90° 50 000 h L80B10 UGR 25

48 V | 250 mA
Total wattage: 9.8 W
Material: aluminium

- Honeycomb accessories included


INSIDE CRI 90

1009025 **1009027** **1009029** **1009031**	Down	3000 K 620 lm	
1009024 **1009026** **1009028** **1009030**	Down	2700 K 590 lm	

Variant	Prod. no.	GBP
black/gold 590 lm | 2700 K	**1009026**	**147.00**
black/gold 620 lm | 3000 K	**1009027**	**147.00**
white/black 590 lm | 2700 K	**1009024**	**147.00**
white/black 620 lm | 3000 K	**1009025**	**147.00**
gold/black 590 lm | 2700 K	**1009030**	**147.00**
gold/black 620 lm | 3000 K	**1009031**	**147.00**
bronze/black 590 lm | 2700 K	**1009028**	**147.00**
bronze/black 620 lm | 3000 K	**1009029**	**147.00**

Product	Prod. no.	GBP
GRIP! S, decorative ring		
white	**1011829**	**16.00**
black	**1011830**	**16.00**
nickel	**1011831**	**16.00**
gold	**1011832**	**16.00**
HONEYCOMB + Spacer		
black	**1011837**	**8.00**

GRIP! S
48V, DALI, STANDARD TRACK, Ø 3.0 CM

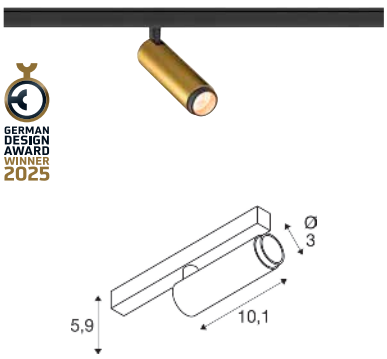

Dali IP20 IK02 29° 330° 90° 50 000 h L80B20 UGR 25

48 V | 250 mA
Total wattage: 9.8 W
Material: aluminium

- Compatible only with the standard 48 V surface-mounted track
- Honeycomb accessories included


INSIDE DIM TO WARM CRI 90

	Down	2000 K - 3000 K 350 lm	

Variant	Prod. no.	GBP
black/gold	**1008417**	**147.00**
white/black	**1008415**	**147.00**
gold/black	**1008419**	**147.00**
bronze/black	**1008418**	**147.00**

Product	Prod. no.	GBP
GRIP! S, decorative ring		
white	**1011829**	**16.00**
black	**1011830**	**16.00**
nickel	**1011831**	**16.00**
gold	**1011832**	**16.00**
HONEYCOMB + Spacer		
black	**1011837**	**8.00**

GRIP! S
48V, DALI, DEEP & RECESSED TRACK, Ø 3.0 CM

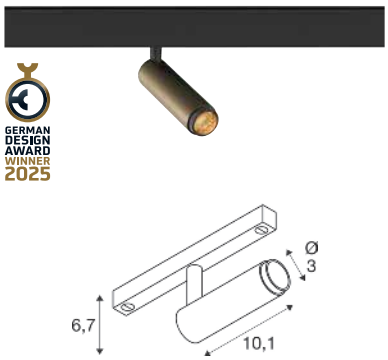

Dali IP20 IK02 29° 340° 90° 50 000 h L80B20 UGR 25

48 V | 250 mA
Total wattage: 9.8 W
Material: aluminium

- Honeycomb accessories included

INSIDE DIM TO WARM CRI 90

	Down	2000 K - 3000 K 350 lm	


Variant	Prod. no.	GBP
black/gold	**1009033**	**147.00**
white/black	**1009032**	**147.00**
gold/black	**1009035**	**147.00**
bronze/black	**1009034**	**147.00**

Product	Prod. no.	GBP
GRIP! S, decorative ring		
white	**1011829**	**16.00**
black	**1011830**	**16.00**
nickel	**1011831**	**16.00**
gold	**1011832**	**16.00**
HONEYCOMB + Spacer		
black	**1011837**	**8.00**


1008456 463

GRIP! S
48V, PD, DALI, Ø 3,0 CM





Dali IP20 IK02 29° 50000 h L80B10 200 cm UGR 25

48 V | 250 mA
Total wattage: 9.8 W
Material: aluminium

- Honeycomb accessories included

LED INSIDE CRI 90

1008459 **1008461** **1008462** **1008463**	Down	3000 K 620 lm
1008454 **1008456** **1008457** **1008458**	Down	2700 K 590 lm


Variant	Prod. no.	GBP
black/gold 590 lm | 2700 K	**1008456**	**172.00**
black/gold 620 lm | 3000 K	**1008461**	**172.00**
white/black 590 lm | 2700 K	**1008454**	**172.00**
white/black 620 lm | 3000 K	**1008459**	**172.00**
gold/black 590 lm | 2700 K	**1008458**	**172.00**
gold/black 620 lm | 3000 K	**1008463**	**172.00**
bronze/black 590 lm | 2700 K	**1008457**	**172.00**
bronze/black 620 lm | 3000 K	**1008462**	**172.00**

⊕

Product	Prod. no.	GBP
GRIP! S, decorative ring		
white	**1011829**	**16.00**
black	**1011830**	**16.00**
nickel	**1011831**	**16.00**
gold	**1011832**	**16.00**
HONEYCOMB + Spacer		
black	**1011837**	**8.00**

GRIP! S
48V, PD, DALI, Ø 3,0 CM





Dali IP20 IK02 29° 50000 h L80B20 200 cm UGR 25

48 V | 250 mA
Total wattage: 9.8 W
Material: aluminium

- Honeycomb accessories included

LED INSIDE DIM TO WARM CRI 90

Down		2000 K - 3000 K 350 lm


Variant	Prod. no.	GBP
black/gold	**1008466**	**172.00**
white/black	**1008464**	**172.00**
gold/black	**1008468**	**172.00**
bronze/black	**1008467**	**172.00**

⊕

Product	Prod. no.	GBP
GRIP! S, decorative ring		
white	**1011829**	**16.00**
black	**1011830**	**16.00**
nickel	**1011831**	**16.00**
gold	**1011832**	**16.00**
HONEYCOMB + Spacer		
black	**1011837**	**8.00**

GRIP! S MINI
48V, DALI, SHORT, STANDARD TRACK, Ø 3.0 CM





Dali IP20 IK02 29° 340° 90° 50000 h L80B10 UGR 25

48 V | 100 mA
Total wattage: 4.2 W
Material: aluminium

- Honeycomb accessories included

LED INSIDE CRI 90

1012170 **1012172**	Down	2700 K 260 lm
1012171 **1012173**	Down	3000 K 270 lm

Variant	Prod. no.	GBP
black/gold 260 lm | 2700 K	**1012172**	**147.00**
black/gold 270 lm | 3000 K	**1012173**	**147.00**
white/black 260 lm | 2700 K	**1012170**	**147.00**
white/black 270 lm | 3000 K	**1012171**	**147.00**

⊕


Product	Prod. no.	GBP
GRIP! S, decorative ring		
white	**1011829**	**16.00**
black	**1011830**	**16.00**
nickel	**1011831**	**16.00**
gold	**1011832**	**16.00**
HONEYCOMB + Spacer		
black	**1011837**	**8.00**


1012377 465

GRIP! M
48V, DALI, DEEP & RECESSED TRACK, Ø 4.3 CM



GERMAN DESIGN AWARD WINNER 2026





48 V | 350 mA
Total wattage: 13 W
Material: aluminium

- Honeycomb accessories included



1012375 **1012377**	2700 K 1450 lm
1012376 **1012378**	3000 K 1540 lm

Variant	Prod. no.	GBP
black/gold 1450 lm | 2700 K	**1012377**	**163.00**
black/gold 1540 lm | 3000 K	**1012378**	**163.00**
white/black 1450 lm | 2700 K	**1012375**	**163.00**
white/black 1540 lm | 3000 K	**1012376**	**163.00**

Product	Prod. no.	GBP
GRIP! M, decorative ring		
white	**1011833**	**18.00**
black	**1011834**	**18.00**
nickel	**1011835**	**18.00**
gold	**1011836**	**18.00**
Honeycomb		
black	**1011838**	**10.00**



LALU® SET
48V, PD, LED BASE, DALI





48 V | 500 mA
Total wattage: 9 W
Material: Aluminium/Steel

- Including colour temperature switch 2700 K/3000 K
- With black adapter




	2700 K	3000 K
Down	500 lm	550 lm

Variant	Prod. no.	GBP
● black	**1010801**	**222.00**

LALU® SET
48V, PD, LED BASE, DALI





Dali IP20 IK03 40° 50000h L80B50 200 cm

48 V | 500 mA
Total wattage: 9 W
Material: Aluminium/Steel

- Including colour temperature switch 2700 K/3000 K
- With black adapter

LED INSIDE CCT CRI 90

	2700 K	3000 K
Down	600 lm	650 lm

Variant	Prod. no.	GBP
● black	**1010802**	**205.00**

LALU® SET
48V, PD, LED BASE, DALI





Dali IP20 IK03 40° 50000h L80B50 200 cm

48 V | 500 mA
Total wattage: 9 W
Material: Aluminium/Steel

- Including colour temperature switch 2700 K/3000 K
- With black adapter


LED INSIDE CCT CRI 90

	2700 K	3000 K
Down	650 lm	700 lm

Variant	Prod. no.	GBP
● black	**1010803**	**222.00**

LALU® SET
48V, PD, LED BASE, DALI





Dali IP20 IK03 40° 50000h L80B50 200 cm

48 V | 500 mA
Total wattage: 9 W
Material: Aluminium/Steel

- Including colour temperature switch 2700 K/3000 K
- With black adapter

LED INSIDE CCT CRI 90

	2700 K	3000 K
Down	600 lm	650 lm

Variant	Prod. no.	GBP
● black	**1010804**	**210.00**

Discover more LALU colours and shapes® at ks-light.co.uk

SYMBOLS KEY

Recommendations
Displays accessories and recommended light bulbs for the chosen products

Mix & Match
Indicates products that can be combined

Energy efficiency class
"This light is suitable for bulbs with an energy efficiency rating of ..."

Protection classes
- Protection class I / Protective conductor
- Protection class II/ Protection by double or reinforced insulation
- Protection class III/ Protection by extra-low voltage

Dimmable with:
- **C** = Trailing-edge phase dimmer
- **L** = Leading-edge phase dimmer
- **Uni** = Universal dimmer
- **1–10 V**
- **Dali** = DALI bus system
- **Switch** = Switch/button or touch control on the light
- **Touch** = Simple, stepless operation; responds to touch

IP protection rating:
Indicates the suitability of electrical equipment for different environmental conditions.

IK impact resistance rating:
The IK impact resistance rating is a measure of the resistance of housings for electrical equipment to mechanical stress, especially impact stress.

Half-diffusion angle:
Describes the beam angle in degrees. The smaller the angle, the more concentrated the light will be.

Rotation and pivoting capacity in degrees:
- Rotation range
- Pivot range
- Gimballed

Preservation of luminous flux:
Describes the amount by which the luminous flux of an LED decreases during a specified period.

Unified Glare Rating:
The lower the UGR value, the lower the psychological glare.

Pendant cable length
in cm

Cable length:
Mains plugs, connectors and supply cables (with open cable end) in cm

Through-wiring possible

Shape of the installation opening

Specification of the installation depth

Drive-over capability of the product ensured

Weight-bearing capacity of the product up to the specified value in tonnes. Measurements based on installation in concrete.

Sea-air resistant coating

Independent converter:
Control equipment also for use outside of lights

Short-circuit protected safety control equipment

Light colour temperature in Kelvin (K)

Luminous flux in lumens (lm)

Dark Sky
Indicates that the light emits almost no light into the upper half-space (ULOR < 2 %). Reduces light pollution and ensures targeted, needs-based illumination of the usable area.

Primary/Replica
Indicates lights with integrated primary/replica function. A sensor light (primary) controls downstream lights (replica) via a switched phase, enabling simple, networked lighting control without additional bus or control systems.

Connected lighting:
Indicates smart products that use the following protocols:
- Zigbee®
- DALI
- Bluetooth

Allows the installation of electrical control equipment on materials whose flammability is not known.

CCT switch:
By means of an integrated CCT switch, the light colour can be changed from 2700 K, 3000 K, 4000 K to 6500 K during installation.

Dim-to-warm:
With dimmers, the light colour can be altered from cold white to warm white.

Indicates lights with RGB+W and RGB
(Red-Green-Blue + White and Red-Green-Blue)

Indicates lights with motion sensors
(Microwaves (MR) - Technology / Infrared / Radio)

Products with integrated LEDs

Products with light socket

KS Licht – Your lighting wholesaler in Essen

Contact, customer service and information for customers
BIG WHITE 2027

Directly linked to our product range, advice and project services:

In the KS Multi Brand Business online shop, you will find the latest products, new releases and special offers, as well as information to support you with advice, quotations and project management:

- Online stock availability check
- Catalogues, browsable catalogues and product links
- Technical data, tender specifications, light distribution curves and LDT files
- Easily find and order spare parts
- View your individual terms and conditions, delivery and payment terms
- Relevant product recommendations, variants and alternative products
- Direct contact with our sales team

Customer Information

All prices are net, plus statutory VAT. The retail prices quoted are recommended retail prices. Upon publication of this catalogue, previous price lists cease to be valid.
Illustrations, colours, shapes, designs and technical specifications are for illustrative purposes only and are not binding. Subject to changes and errors.
Goods are generally dispatched ex works, carriage forward.
For orders with a net value of less than €70.00, a minimum order surcharge of €8.00 will be applied.

Ordering & Delivery

When placing orders, please always specify the item number, colour and quantity. This reduces the need for follow-up enquiries and speeds up processing.
Express and direct deliveries are available on request.
Custom-made items, components assembled to the customer's specifications and lamps are excluded from exchange.
Our General Terms and Conditions apply and are available at www.ks-germany.com/de/agb.

Kontakt

KS Licht- und Elektrotechnik GmbH
Manderscheidtstraße 8 c
45141 Essen
Germany

Verkauf & Service
Tel.: +49 (0)201-89924-0
verkauf@ks-germany.com

Online
ks-light.co.uk
www.ks-germany.com

Pflichtangaben

KS Licht- und Elektrotechnik GmbH · Sitz der Gesellschaft: Essen · Geschäftsführer: Kai Becker
Registergericht: Amtsgericht Essen · Handelsregister: HRB 12736 · Steuer-Nr.: 111/5708/2689 ·
USt-IdNr.: DE190673411

KS Licht- und Elektrotechnik GmbH
Manderscheidtstraße 8 c
45141 Essen
Germany

Tel.: +49 (0)201-89924-0

B2B-Shop: **ks-light.co.uk**
Website: www.ks-germany.com
E-Mail: verkauf@ks-germany.com

Opening hours
Monday – Thursday 08:00 – 16:30
Friday 08:00 – 15:00