BIG WHITE®
2027

SLV LIGHTING CATALOGUE



CEILING LIGHTS

INDOOR | CEILING LIGHTS



SOCKET

SUN | 126



SOCKET

MIX match

VARYT | 127



LED

TRILEDO | 128





LED

TRILEDO | 128



SOCKET

TRILEDO | 129





SOCKET

TRILEDO | 128



LED

NUMINOS® | 130–137

NEW



SOCKET

ENOLA® 2.0 | 136–141



NEW

LED

SOCKET

GRIP! | 144–147



LED

OCULUS | 148



SOCKET

ASTO TUBE | 149



LED

OCCULDAS | 150–151



SOCKET

ALTRA DICE | 151



SOCKET

ALTRA DICE | 151





SOCKET

KARDAMOD | 153



SOCKET

FENDA | 155



SOCKET

TENORA | 157



SOCKET

SOPRANA | 157



SOCKET

PLASTRA | 158



LED

PLASTRA | 158



SOCKET

PLASTRA 105 | 158

SOCKET

PLASTRA 104 | 159

LED

FERA 25 |159



LED

DECONA | 160–163

NEW



LED

MOTUNA | 163



LED

MARONA | 163

NEW



LED

OVANA |164– 165

NEW



LED

GLENOS® 2.0 | 167



LED


GLENOS® PRO |167

LED

PANEL 60 | 169

SUN 20
CL, E27





IP20 IK02

220-240 V ~50/60 Hz
Material: steel

SOCKET INSIDE 60 W

Base: 1xE27 | max. Ø: 4.5 cm | L: 12 cm


Variant	Prod. no.	GBP
● black	1008125	96.00
● gold	1008126	100.00

E27 | 8 W | 240°
880 lm | 3000 K | EEC = E

Prod. no. 1005289 10.00 GBP

SUN 30
CL, E27





IP20 IK02

220-240 V ~50/60 Hz
Material: steel

SOCKET INSIDE 60 W

Base: 1xE27 | max. Ø: 4.5 cm | L: 14 cm


Variant	Prod. no.	GBP
● black	1008127	105.00
● gold	1008128	109.00

E27 | 11 W | 330°
1250 lm | 2700 K | EEC = E

Prod. no. 1008162 72.00 GBP

VARYT
CL, E14





IP44 IK02

220-240 V ~50/60 Hz
Material: aluminium

• IP44 in combination with one of the shades

SOCKET INSIDE 6 W

Base: 1xE14 | max. Ø: 11 cm | L: 3.8 cm

Variant	Prod. no.	GBP
● black	**1008099**	**88.00**
○ white	**1008100**	**88.00**
● brass	**1008102**	**113.00**
◑ chrome	**1008101**	**105.00**
● copper	**1008103**	**113.00**

E14 | 4 W | 320°
380 lm | 2700 K | EEC = F

C,L

Prod. no. **1005284** **6.00 GBP**

VARYT
GLOBE GLASS SHADE



IK02

Ø: 12 cm
H: 12.8 cm

Variant	Prod. no.	GBP
○ white	**1008119**	**52.00**

VARYT
DIAMOND GLASS SHADE



IK02

Ø: 12 cm
H: 12.7 cm
Material: glass

Variant	Prod. no.	GBP
● smoky grey	**1007858**	**69.00**
● amber	**1008023**	**69.00**

VARYT
LINED GLASS SHADE



IK02

Ø: 12 cm
H: 13 cm
Material: glass

Variant	Prod. no.	GBP
○ white	**1007859**	**61.00**

VARYT
PLEATED GLASS SHADE




IK02

Ø: 11.5 cm
H: 13.5 cm
Material: glass

Variant	Prod. no.	GBP
○ white	**1007860**	**66.00**

TRILEDO
CL, SINGLE, ROUND







220-240 V ~50/60 Hz | 160 mA
Total wattage: 6.4 W
Material: aluminium




Down	3000 K
	580 lm

Variant	Prod. no.	GBP
● black	**113930**	**100.00**
○ white	**113931**	**100.00**

TRILEDO
CL, SINGLE, SQUARE







220-240 V ~50/60 Hz | 160 mA
Total wattage: 6.4 W
Material: aluminium




Down	3000 K
	580 lm

Variant	Prod. no.	GBP
● black	**113940**	**100.00**
○ white	**113941**	**100.00**

TRILEDO CL
CL, DOUBLE, SQUARE







220-240 V ~50/60 Hz | 350 mA
Total wattage: 14 W
Material: aluminium




Down	3000 K
	1280 lm

Variant	Prod. no.	GBP
● black	**1002003**	**142.00**
○ white	**1002008**	**142.00**

TRILEDO
CL, SINGLE, ROUND, QPAR51





IP20 350° 20°

220-240 V ~50/60 Hz
Material: aluminium

SOCKET INSIDE 10 W

Base: 1xGU10	max. Ø: 5.1 cm	L: 5.5 cm


Variant	Prod. no.	GBP
● black	**1002010**	**63.00**
○ white	**1002011**	**63.00**
◍ aluminium	**1002012**	**68.00**

GU10 | 6 W | 36°
360 lm | 2200 K-2700 K | EEC = G

Prod. no. 1005273 9.00 GBP

TRILEDO
CL, SINGLE, SQUARE, QPAR51





IP20 350° 20°

220-240 V ~50/60 Hz
Material: aluminium

SOCKET INSIDE 10 W

Base: 1xGU10	max. Ø: 5.1 cm	L: 5.5 cm

Variant	Prod. no.	GBP
● black	**1002013**	**63.00**
○ white	**1002015**	**63.00**
◍ aluminium	**1002004**	**68.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no. 1005077 7.00 GBP


SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no. 1012469 23.00 GBP

TRILEDO
CL, DOUBLE, SQUARE, QPAR51





IP20 350° 20°

220-240 V ~50/60 Hz
Material: aluminium

SOCKET INSIDE 10 W

Base: 2xGU10	max. Ø: 5.1 cm	L: 5.5 cm

Variant	Prod. no.	GBP
● black	**1002005**	**92.00**
○ white	**1002006**	**92.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no. 1005077 7.00 GBP


SMART


GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no. 1012469 23.00 GBP

NUMINOS® S
CL







220-240 V ~50/60 Hz | 200 mA
Total wattage: 8 W
Material: aluminium

Variant	GBP
All S versions	**88.00**
All S versions DALI	**130.00**


Note:
Decorative ring also available in white, gold and copper



Product	Prod. no.	GBP
Front ring S		
○ white	**1006167**	**2.00**
● copper	**1008140**	**8.00**
● gold	**1008144**	**8.00**



● black




○ white

					Prod. no.	
C	2700 K	950 lm	24°	16	**1004122**	
			36°	16	**1004123**	
			60°	19	**1004124**	
	3000 K	1050 lm	24°	16	**1004130**	
			36°	16	**1004131**	
			60°	19	**1004132**	
	4000 K	1100 lm	24°	16	**1004138**	
			36°	16	**1004139**	
			60°	19	**1004140**	
Dali Touch	2700 K	950 lm	24°	16	**1004410**	
			36°	16	**1004411**	
			60°	19	**1004412**	
	3000 K	1050 lm	24°	16	**1004418**	
			36°	16	**1004419**	
			60°	19	**1004420**	
	4000 K	1100 lm	24°	16	**1004426**	
			36°	16	**1004427**	
			60°	19	**1004428**	
C	2700 K	950 lm	24°	16	**1004126**	
			36°	16	**1004127**	
			60°	19	**1004128**	
	3000 K	1050 lm	24°	16	**1004134**	
			36°	16	**1004135**	
			60°	19	**1004136**	
	4000 K	1100 lm	24°	16	**1004142**	
			36°	16	**1004143**	
			60°	19	**1004144**	
Dali Touch	2700 K	950 lm	24°	16	**1004414**	
			36°	16	**1004415**	
			60°	19	**1004416**	
	3000 K	1050 lm	24°	16	**1004422**	
			36°	16	**1004423**	
			60°	19	**1004424**	
	4000 K	1100 lm	24°	16	**1004430**	
			36°	16	**1004431**	
			60°	19	**1004432**	

NUMINOS® M
CL






IP20 | 24° | 50 000 h L90B10 | 78 | LED INSIDE | CRI 90

220-240 V ~50/60 Hz | 350 mA
Total wattage: 14 W
Material: aluminium



● black



○ white

Variant	GBP
All M versions	**109.00**
All M versions DALI	**134.00**

Note:
Decorative ring also available in white, gold and copper




⊕


Product	Prod. no.	GBP
Front ring M		
○ white	**1006168**	**3.00**
● copper	**1008141**	**8.00**
● gold	**1008145**	**8.00**

					Prod. no.	
C	2700 K	1750 lm	24°	16	**1004218**	
			36°	16	**1004219**	
			60°	22	**1004220**	
	3000 K	1800 lm	24°	16	**1004226**	
			36°	16	**1004227**	
			60°	22	**1004228**	
	4000 K	1950 lm	24°	16	**1004234**	
			36°	16	**1004235**	
			60°	22	**1004236**	
Dali Touch	2700 K	1750 lm	24°	16	**1004506**	
			36°	16	**1004507**	
			60°	22	**1004508**	
	3000 K	1800 lm	24°	16	**1004514**	
			36°	16	**1004515**	
			60°	22	**1004516**	
	4000 K	1950 lm	24°	16	**1004522**	
			36°	16	**1004523**	
			60°	22	**1004524**	
C	2700 K	1750 lm	24°	16	**1004222**	
			36°	16	**1004223**	
			60°	22	**1004224**	
	3000 K	1800 lm	24°	16	**1004230**	
			36°	16	**1004231**	
			60°	22	**1004232**	
	4000 K	1950 lm	24°	16	**1004238**	
			36°	16	**1004239**	
			60°	22	**1004240**	
Dali Touch	2700 K	1750 lm	24°	16	**1004510**	
			36°	16	**1004511**	
			60°	22	**1004512**	
	3000 K	1800 lm	24°	16	**1004518**	
			36°	16	**1004519**	
			60°	22	**1004520**	
	4000 K	1950 lm	24°	16	**1004526**	
			36°	16	**1004527**	
			60°	22	**1004528**	

NUMINOS® L
CL







220-240 V ~50/60 Hz | 500 mA
Total wattage: 20 W
Material: aluminium

Variant	GBP
All L versions	**126.00**
All L versions DALI	**172.00**


Note:
Decorative ring also available in white, gold and copper



Product	Prod. no.	GBP
Front ring L		
○ white	**1006169**	**3.00**
● copper	**1008142**	**10.00**
● gold	**1008146**	**10.00**



● black





○ white

					Prod. no.	
C	2700 K	2300 lm	24°	16	**1004314**	
			36°	16	**1004315**	
			60°	19	**1004316**	
	3000 K	2400 lm	24°	16	**1004322**	
			36°	16	**1004323**	
			60°	19	**1004324**	
	4000 K	2600 lm	24°	16	**1004330**	
			36°	16	**1004331**	
			60°	19	**1004332**	
Dali Touch	2700 K	2300 lm	24°	16	**1004602**	
			36°	16	**1004603**	
			60°	19	**1004604**	
	3000 K	2400 lm	24°	16	**1004610**	
			36°	16	**1004611**	
			60°	19	**1004612**	
	4000 K	2600 lm	24°	16	**1004618**	
			36°	16	**1004619**	
			60°	19	**1004620**	
C	2700 K	2300 lm	24°	16	**1004318**	
			36°	16	**1004319**	
			60°	19	**1004320**	
	3000 K	2400 lm	24°	16	**1004326**	
			36°	16	**1004327**	
			60°	19	**1004328**	
	4000 K	2600 lm	24°	16	**1004334**	
			36°	16	**1004335**	
			60°	19	**1004336**	
Dali Touch	2700 K	2300 lm	24°	16	**1004606**	
			36°	16	**1004607**	
			60°	19	**1004608**	
	3000 K	2400 lm	24°	16	**1004614**	
			36°	16	**1004615**	
			60°	19	**1004616**	
	4000 K	2600 lm	24°	16	**1004622**	
			36°	16	**1004623**	
			60°	19	**1004624**	

NUMINOS® XL
CL







220-240 V ~50/60 Hz | 700 mA
Total wattage: 28 W
Material: aluminium

Variant	GBP
All XL versions	**151.00**
All XL versions DALI	**205.00**


Note:
Decorative ring also available in white, gold and copper



Product	Prod. no.	GBP
Front ring XL		
○ white	**1006170**	**4.00**
● copper	**1008143**	**10.00**
● gold	**1008147**	**10.00**




● black



○ white


					Prod. no.	
C	2700 K	3550 lm	24°	16	**1005687**	
			36°	16	**1005688**	
		3150 lm	60°	22	**1005689**	
	3000 K	3550 lm	24°	16	**1005693**	
			36°	16	**1005694**	
		3150 lm	60°	22	**1005695**	
	4000 K	3900 lm	24°	16	**1005699**	
			36°	16	**1005700**	
		3500 lm	60°	22	**1005701**	
Dali Touch	2700 K	3550 lm	24°	16	**1005759**	
			36°	16	**1005760**	
		3150 lm	60°	22	**1005761**	
	3000 K	3550 lm	24°	16	**1005765**	
			36°	16	**1005766**	
		3150 lm	60°	22	**1005767**	
	4000 K	3900 lm	24°	16	**1005771**	
			36°	16	**1005772**	
		3500 lm	60°	22	**1005773**	
C	2700 K	3550 lm	24°	16	**1005690**	
			36°	16	**1005691**	
		3150 lm	60°	22	**1005692**	
	3000 K	3550 lm	24°	16	**1005696**	
			36°	16	**1005697**	
		3150 lm	60°	22	**1005698**	
	4000 K	3900 lm	24°	16	**1005702**	
			36°	16	**1005703**	
		3500 lm	60°	22	**1005704**	
Dali Touch	2700 K	3550 lm	24°	16	**1005762**	
			36°	16	**1005763**	
		3150 lm	60°	22	**1005764**	
	3000 K	3550 lm	24°	16	**1005768**	
			36°	16	**1005769**	
		3150 lm	60°	22	**1005770**	
	4000 K	3900 lm	24°	16	**1005774**	
			36°	16	**1005775**	
		3500 lm	60°	22	**1005776**	

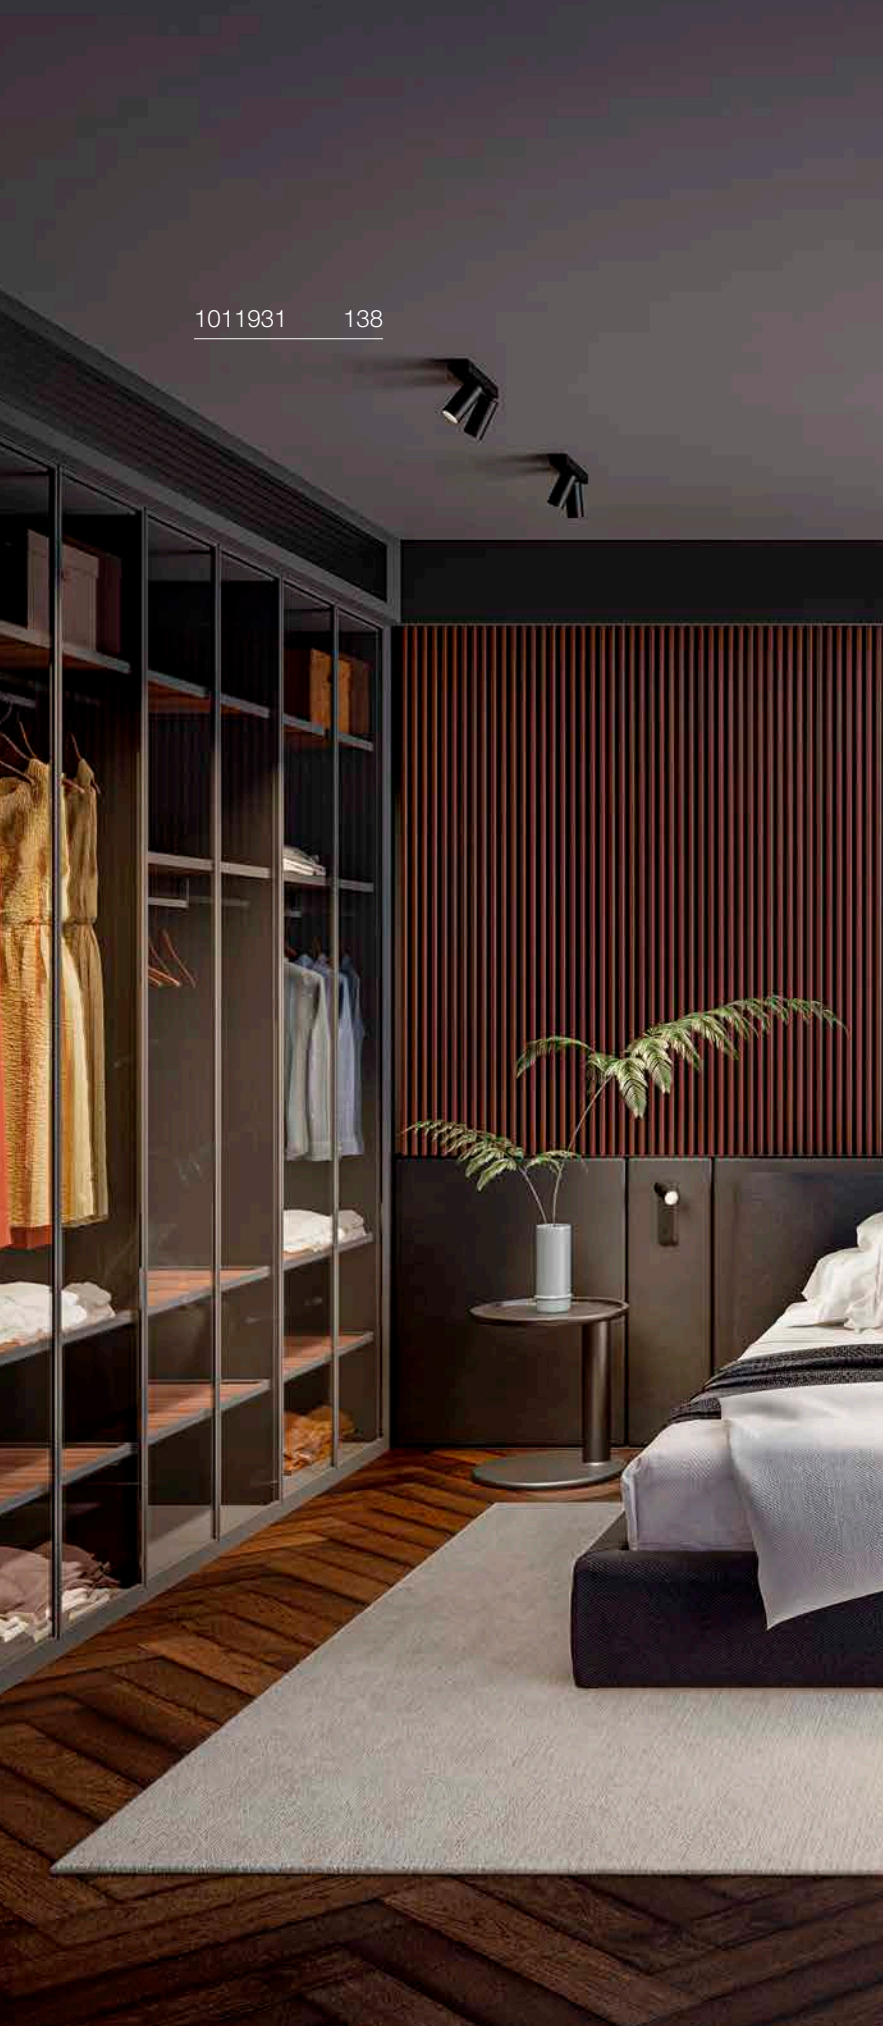

ENOLA® 2.0 S
CL, DOUBLE, GU10 MINI, PAR11

NEW





IP20 IK02 340° 90° 50

220-240 V ~50/60 Hz
Material: aluminium/steel/plastic PC

SOCKET INSIDE 5 W

Base: 2xGU10 | max. Ø: 3.6 cm | L: 4.6 cm

Variant	Prod. no.	GBP
● black	**1011931**	**82.00**
○ white	**1011932**	**82.00**

GU10 | 5 W | 36°
390 lm | 2700 K | EEC = F

C,L


Prod. no. 1011670 10.00 GBP

Product	Prod. no.	GBP
ENOLA® 2.0 S, Deco Ring		
● black	**1011753**	**4.00**
○ white	**1011754**	**4.00**
● gold	**1011755**	**4.00**
● copper	**1011756**	**4.00**

ENOLA® 2.0 S
CL, DOUBLE, GU10 MINI, PAR11, LONG

NEW





IP20 IK02 340° 90° 50

220-240 V ~50/60 Hz
Material: aluminium/steel/plastic PC

SOCKET INSIDE 5 W

Base: 2xGU10 | max. Ø: 3.6 cm | L: 4.6 cm

Variant	Prod. no.	GBP
● black	1011911	100.00
○ white	1011912	100.00

GU10 | 5 W | 36°
390 lm | 2700 K | EEC = F

C,L


Prod. no.: 1011670 10.00 GBP

Product	Prod. no.	GBP
ENOLA® 2.0 S, Deco Ring		
● black	1011753	4.00
○ white	1011754	4.00
gold	1011755	4.00
copper	1011756	4.00

ENOLA® 2.0 S
CL, TRIPLE, GU10 MINI, PAR11, LONG

NEW





IP20 IK02 340° 90° 50

220-240 V ~50/60 Hz
Material: aluminium/steel/plastic PC

SOCKET INSIDE 5 W

Base: 3xGU10 | max. Ø: 3.6 cm | L: 4.6 cm

Variant	Prod. no.	GBP
● black	1011913	134.00
○ white	1011914	134.00

GU10 | 5 W | 36°
390 lm | 2700 K | EEC = F

C,L

Prod. no.: 1011670 10.00 GBP

Product	Prod. no.	GBP
ENOLA® 2.0 S, Deco Ring		
● black	1011753	4.00
○ white	1011754	4.00
gold	1011755	4.00
copper	1011756	4.00

ENOLA® 2.0 S
DECORATIVE RING

NEW



Ø: 3.9 cm
H: 1.1 cm
Material: plastic PC


Variant	Prod. no.	GBP
● black	1011753	4.00
○ white	1011754	4.00
gold	1011755	4.00
copper	1011756	4.00



ENOLA® 2.0 M
CL, SINGLE, GU10, QPAR51

NEW





IP20 IK02

220-240 V ~50/60 Hz
Material: aluminium

SOCKET INSIDE 10 W

Base: 1xGU10 max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.	GBP
● black	1011719	48.00
○ white	1011720	48.00

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

C,L

Prod. no. **1005077** **7.00 GBP**

SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F


Prod. no. **1012469** **23.00 GBP**

Product	Prod. no.	GBP
ENOLA® 2.0/BIMA 2.0 M, decorative ring		
● black	1011749	4.00
○ white	1011750	4.00
gold	1011751	4.00
copper	1011752	4.00

ENOLA® 2.0 M
CL, DOUBLE, GU10, QPAR51

NEW





IP20 IK02 340° 90° 50

220-240 V ~50/60 Hz
Material: aluminium/steel/plastic PC

SOCKET INSIDE 10 W

Base: 2xGU10 max. Ø: 5.1 cm | L: 6 cm

Variant	Prod. no.	GBP
● black	1011897	88.00
○ white	1011898	88.00

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

C,L

Prod. no. 1005077 7.00 GBP

SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F


Prod. no. 1012469 23.00 GBP

Product	Prod. no.	GBP
ENOLA® 2.0/BIMA 2.0 M, decorative ring		
● black	1011749	4.00
○ white	1011750	4.00
gold	1011751	4.00
copper	1011752	4.00

ENOLA® 2.0 M
CL, DOUBLE, GU10, QPAR51, LONG

NEW





IP20 IK02 340° 90° 50

220-240 V ~50/60 Hz
Material: aluminium/steel/plastic PC

SOCKET INSIDE 10 W

Base: 2xGU10 max. Ø: 5.1 cm | L: 6 cm

Variant	Prod. no.	GBP
● black	1011885	105.00
○ white	1011886	105.00

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

C,L

Prod. no. 1005077 7.00 GBP

SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F


Prod. no. 1012469 23.00 GBP

Product	Prod. no.	GBP
ENOLA® 2.0/BIMA 2.0 M, decorative ring		
● black	1011749	4.00
○ white	1011750	4.00
gold	1011751	4.00
copper	1011752	4.00

ENOLA® 2.0 M
CL, TRIPLE, GU10, QPAR51, LONG

NEW





IP20 IK02 340° 90° 50

220-240 V ~50/60 Hz
Material: aluminium/steel/plastic PC

SOCKET INSIDE 10 W

Base: 3xGU10 max. Ø: 5.1 cm | L: 6 cm

Variant	Prod. no.	GBP
● black	1011887	138.00
○ white	1011888	138.00

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

C,L

Prod. no. 1005077 7.00 GBP

SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no. 1012469 23.00 GBP


Product	Prod. no.	GBP
ENOLA® 2.0/BIMA 2.0 M, decorative ring		
● black	1011749	4.00
○ white	1011750	4.00
gold	1011751	4.00
copper	1011752	4.00


1011889 143
1011887 141

ENOLA® 2.0 M
CL, QUAD., GU10, QPAR51, LONG

NEW





IP20 IK02 340° 90° 50

220-240 V ~50/60 Hz
Material: aluminium/steel/plastic PC

SOCKET INSIDE 10 W

Base: 4xGU10 | max. Ø: 5.1 cm | L: 6 cm

Variant	Prod. no.	GBP
● black	**1011889**	**205.00**
○ white	**1011890**	**205.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

C,L

Prod. no. 1005077 7.00 GBP

SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F


Prod. no. 1012469 23.00 GBP

Product	Prod. no.	GBP
ENOLA® 2.0/BIMA 2.0 M, Deco Ring		
● black	**1011749**	**4.00**
○ white	**1011750**	**4.00**
● gold	**1011751**	**4.00**
● copper	**1011752**	**4.00**

ENOLA® 2.0 M
CL, SIX., GU10, QPAR51, LONG

NEW





IP20 IK02 340° 90° 50

220-240 V ~50/60 Hz
Material: aluminium/steel/plastic PC

SOCKET INSIDE 10 W

Base: 6xGU10 | max. Ø: 5.1 cm | L: 6 cm

Variant	Prod. no.	GBP
● black	**1011891**	**302.00**
○ white	**1011892**	**302.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

C,L

Prod. no. 1005077 7.00 GBP

SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no. 1012469 23.00 GBP

Product	Prod. no.	GBP
ENOLA® 2.0/BIMA 2.0 M, Deco Ring		
● black	**1011749**	**4.00**
○ white	**1011750**	**4.00**
● gold	**1011751**	**4.00**
● copper	**1011752**	**4.00**

ENOLA® 2.0/BIMA 2.0 M
DECORATIVE RING

NEW




Ø: 5.4 cm
H: 2 cm
Material: plastic PC

Variant	Prod. no.	GBP
● black	**1011749**	**4.00**
○ white	**1011750**	**4.00**
● gold	**1011751**	**4.00**
● copper	**1011752**	**4.00**

GRIP! S
CL, SINGLE, PHASE, Ø 3,0 CM





IP20 IK02 29° 340° 90°

50000 h L80B10 UGR 25

220-240 V ~50/60 Hz | 260 mA
Total wattage: 11 W
Material: aluminium

- Honeycomb accessories included

INSIDE CRI 90

1009043 1009041 1009039 1009037	3000 K 650 lm
1009042 1009040 1009038 1009036	2700 K 600 lm


Variant	Prod. no.	GBP
black/gold 600 lm | 2700 K	1009038	138.00
black/gold 650 lm | 3000 K	1009039	138.00
white/black 600 lm | 2700 K	1009036	138.00
white/black 650 lm | 3000 K	1009037	138.00
gold/black 600 lm | 2700 K	1009042	138.00
gold/black 650 lm | 3000 K	1009043	138.00
bronze/black 600 lm | 2700 K	1009040	138.00
bronze/black 650 lm | 3000 K	1009041	138.00

⊕

Product	Prod. no.	GBP
HONEYCOMB + Spacer		
black	1011837	8.00

GRIP! S
CL, DOUBLE, PHASE, Ø 3,0 CM





IP20 IK02 29° 340° 90°

50000 h L80B10 UGR 25

220-240 V ~50/60 Hz | 260 mA
Total wattage: 21 W
Material: aluminium

- Honeycomb accessories included

INSIDE CRI 90

1009051 1009049 1009047 1009045	3000 K 650 lm
1009050 1009048 1009046 1009044	2700 K 600 lm

Variant	Prod. no.	GBP
black/gold 600 lm | 2700 K	1009046	231.00
black/gold 650 lm | 3000 K	1009047	231.00
white/black 600 lm | 2700 K	1009044	231.00
white/black 650 lm | 3000 K	1009045	231.00
gold/black 600 lm | 2700 K	1009050	231.00
gold/black 650 lm | 3000 K	1009051	231.00
bronze/black 600 lm | 2700 K	1009048	231.00
bronze/black 650 lm | 3000 K	1009049	231.00

⊕

Product	Prod. no.	GBP
HONEYCOMB + Spacer		
black	1011837	8.00

GRIP! S
CL, DOUBLE, PHASE, Ø 3,0 CM



NEW


Ø: 2.7 cm
H: 1.1 cm
Material: aluminium

- Front panel with spacer
- No honeycomb insert included

Variant	Prod. no.	GBP
black	1011830	16.00
white	1011829	16.00
gold	1011832	16.00
nickel	1011831	16.00

GRIP! M
CL, SINGLE, PHASE, Ø 4,3 CM





IP20 IK02 42° 340° 90° 50000 h L80B10 UGR 25

220-240 V ~50/60 Hz | 350 mA
Total wattage: 14 W
Material: aluminium

- Honeycomb accessories included

INSIDE CRI 90


	3000 K	
1009075	1540 lm	
1009073		
1009071		
1009069		
1009074	2700 K	
1009072	1450 lm	
1009070		
1009068		

Variant	Prod. no.	GBP
black/gold 1450 lm | 2700 K	**1009070**	**155.00**
black/gold 1540 lm | 3000 K	**1009071**	**155.00**
white/black 1450 lm | 2700 K	**1009068**	**155.00**
white/black 1540 lm | 3000 K	**1009069**	**155.00**
gold/black 1450 lm | 2700 K	**1009074**	**155.00**
gold/black 1540 lm | 3000 K	**1009075**	**155.00**
bronze/black 1450 lm | 2700 K	**1009072**	**155.00**
bronze/black 1540 lm | 3000 K	**1009073**	**155.00**

Product	Prod. no.	GBP
HONEYCOMB + Spacer		
black	**1011838**	**10.00**

GRIP! M
CL, DOUBLE, PHASE, Ø 4,3 CM





IP20 IK02 42° 340° 90° 50000 h L80B10 UGR 25

220-240 V ~50/60 Hz | 350 mA
Total wattage: 28 W
Material: aluminium

- Honeycomb accessories included

INSIDE CRI 90

	3000 K	
1009083	1520 lm	
1009081		
1009079		
1009077		
1009082	2700 K	
1009080	1460 lm	
1009078		
1009076		

Variant	Prod. no.	GBP
black/gold 1460 lm | 2700 K	**1009078**	**256.00**
black/gold 1520 lm | 3000 K	**1009079**	**256.00**
white/black 1460 lm | 2700 K	**1009076**	**256.00**
white/black 1520 lm | 3000 K	**1009077**	**256.00**
gold/black 1460 lm | 2700 K	**1009082**	**256.00**
gold/black 1520 lm | 3000 K	**1009083**	**256.00**
bronze/black 1460 lm | 2700 K	**1009080**	**256.00**
bronze/black 1520 lm | 3000 K	**1009081**	**256.00**

Product	Prod. no.	GBP
HONEYCOMB + Spacer		
black	**1011838**	**10.00**

GRIP! M
DECORATIVE RING



NEW

Ø: 4 cm
H: 1.4 cm
Material: aluminium


- Front panel with spacer
- No honeycomb insert included

Variant	Prod. no.	GBP
black	**1011834**	**18.00**
white	**1011833**	**18.00**
gold	**1011836**	**18.00**
nickel	**1011835**	**18.00**



GRIP! L
CL, SINGLE, QPAR51, Ø 5,7 CM





IP20 IK02 340° 90°

220-240 V ~50/60 Hz
Material: aluminium

- Honeycomb accessories included

SOCKET INSIDE 6 W

Base: 1xGU10 max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.	GBP
black/gold	1009093	88.00
white/black	1009092	88.00
gold/black	1009095	88.00
bronze/black	1009094	88.00

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F


C,L

Prod. no. **1005076** **7.00 GBP**

Product	Prod. no.	GBP
GRIP! L, Deco Ring		
white	1008496	21.00
black	1008497	21.00
nickel	1008498	21.00
gold	1008499	21.00
HONEYCOMB + Spacer		
black	1011839	11.00

GRIP! L
CL, DOUBLE, QPAR51, Ø 5,7 CM





IP20 IK02 340° 90°

220-240 V ~50/60 Hz
Material: aluminium

- Honeycomb accessories included

SOCKET INSIDE 6 W

Base: 2xGU10 max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.	GBP
black/gold	1009097	147.00
white/black	1009096	147.00
gold/black	1009099	147.00
bronze/black	1009098	147.00

GU10 | 6 W | 38°
470 lm | 3000 K | EEC = F

C,L


Prod. no. **1005079** **7.00 GBP**

Product	Prod. no.	GBP
GRIP! L, Deco Ring		
white	1008496	21.00
black	1008497	21.00
nickel	1008498	21.00
gold	1008499	21.00
HONEYCOMB + Spacer		
black	1011839	11.00

GRIP! L
CL, QPAR51, Ø 5,7 CM

NEW





IP20 IK02

220-240 V ~50/60 Hz
Material: aluminium

- Honeycomb accessories included

SOCKET INSIDE 6 W

Base: 1xGU10 max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.	GBP
black/gold	1011847	88.00
white/black	1011846	88.00
gold/black	1011849	88.00
bronze/black	1011848	88.00

GU10 | 6 W | 38°
470 lm | 3000 K | EEC = F

C,L

Prod. no. **1005080** **7.00 GBP**

SMART


GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no. **1012469** **23.00 GBP**

Product	Prod. no.	GBP
GRIP! L, Deco Ring		
white	1008496	21.00
black	1008497	21.00
nickel	1008498	21.00
gold	1008499	21.00

OCULUS CL
DTW, PVD







220-240 V ~50/60 Hz | 250 mA
Total wattage: 11 W
Material: aluminium




	2000 K - 3000 K
Down	36 lm - 780 lm

Variant	Prod. no.	GBP
brass	**1008619**	**247.00**
dark bronze	**1008618**	**247.00**
dark copper	**1008620**	**247.00**

OCULUS
CL, PHASE







220-240 V ~50/60 Hz | 250 mA
Total wattage: 11 W
Material: aluminium

• Additional frosted lens included




	2000 K - 3000 K
	36 lm - 780 lm

Variant	Prod. no.	GBP
black	**1004666**	**197.00**
white	**1004667**	**197.00**

ASTO TUBE
CL, SINGLE, GU10





IP20

220-240 V ~50/60 Hz
Material: aluminium

• Decorative rings available as accessories

SOCKET INSIDE 10 W

Base: 1xGU10

Variant	Prod. no.	GBP
● black	**1006439**	**43.00**
○ white	**1006440**	**43.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

C,L

Prod. no. **1005077** **7.00 GBP**

SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no. **1012469** **23.00 GBP**


Product	Prod. no.	GBP
Decorative reflector		
chrome	**1006449**	**4.00**
gold	**1006450**	**4.00**
copper	**1006451**	**4.00**
black/chrome	**1007190**	**4.00**

ASTO TUBE
DECORATIVE REFLECTOR




Ø: 6.8 cm
H: 4 cm
Material: polycarbonate (PC)

Variant	Prod. no.	GBP
black/chrome	**1007190**	**4.00**
gold	**1006450**	**4.00**
chrome	**1006449**	**4.00**
copper	**1006451**	**4.00**

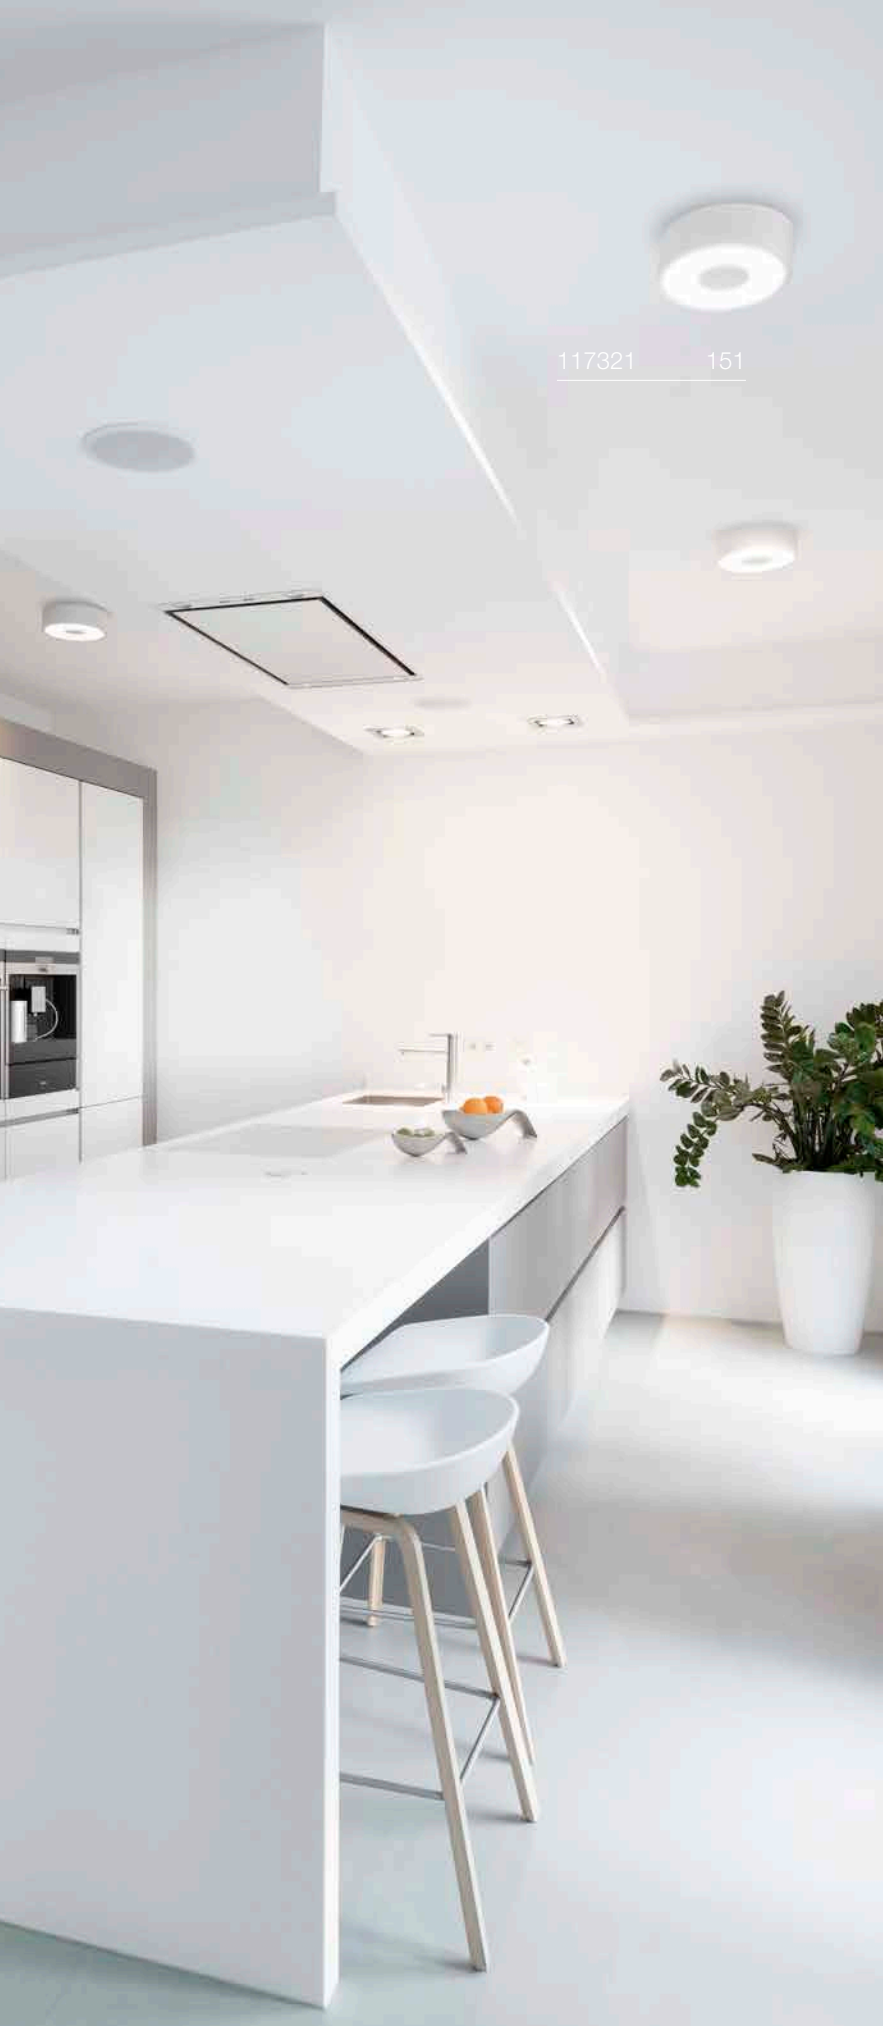

OCCULDAS 13
CL, INDIRECT, PHASE







220-240 V ~50/60 Hz | 350 mA
Total wattage: 15 W
Material: aluminium




3000 K
810 lm

Variant	Prod. no.	GBP
○ white	**117351**	**176.00**

OCCULDAS 23
CL, INDIRECT, PHASE





IP20 | IK02 | 120° | 30000 h L70B50

220-240 V ~50/60 Hz | 700 mA
Total wattage: 24 W
Material: aluminium/steel


LED INSIDE | CRI 80

3000 K
1500 lm

Variant	Prod. no.	GBP
○ white	117321	289.00

ALTRA DICE
CL, QPAR51





IP20

220-240 V ~50/60 Hz
Material: aluminium/steel

SOCKET INSIDE | 35 W

Base: 1xGU10

Variant	Prod. no.	GBP
● black	1002216	55.00
○ white	151511	55.00

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

C,L

Prod. no. 1005077 7.00 GBP


SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no. 1012469 23.00 GBP

ALTRA DICE
CW, DOUBLE, QPAR51





IP20 | 350° | 180°

220-240 V ~50/60 Hz
Material: aluminium/steel

SOCKET INSIDE | 50 W

Base: 2xGU10

Variant	Prod. no.	GBP
○ white	151531	100.00

GU10 | 6 W | 36°
360 lm | 2200 K-2700 K | EEC = G


C

Prod. no. 1005273 9.00 GBP



KARDAMOD
CL, SINGLE, SQUARE, QPAR111





IP20

220-240 V ~50/60 Hz
Material: steel

SOCKET INSIDE 75 W

Base: 1xGU10

Variant	Prod. no.	GBP
● black	**117100**	**121.00**
○ white	**117101**	**121.00**


GU10 | 13 W | 10°
900 lm | 2700 K | EEC = G

C

Prod. no. 1005275 48.00 GBP

KARDAMOD
CL, DOUBLE, SQUARE, QPAR111





IP20

220-240 V ~50/60 Hz
Material: steel

SOCKET INSIDE 75 W

Base: 2xGU10

Variant	Prod. no.	GBP
● black	**117110**	**218.00**
○ white	**117111**	**218.00**

GU10 | 12 W | 55°
670 lm | 2700 K | EEC = G


C,L

Prod. no. 1005297 73.00 GBP


OPEN
AYRTON SENNA

FENDA
CEILING ROSETTE, E27





IP20

220-240 V ~50/60 Hz
Material: steel

SOCKET INSIDE 60 W

Base: 1xE27

Variant	Prod. no.	GBP
● black	**155550**	**42.00**
○ white	**155551**	**42.00**

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F

C

Prod. no. 1005303 9.00 GBP

FENDA
30 CM, ROUND



Ø: 30 cm
H: 20 cm
Material: textile/steel

Variant	Prod. no.	GBP
◐ black/copper	**155592**	**62.00**
○ white	**155582**	**47.00**
● grey	**1004774**	**47.00**
● beige	**155583**	**47.00**

FENDA
45 CM, ROUND



Ø: 45.5 cm
H: 28 cm
Material: textile/steel

Variant	Prod. no.	GBP
◐ black/copper	**156122**	**77.00**
○ white	**156111**	**73.00**
● grey	**1004775**	**73.00**
● beige	**156113**	**73.00**

⊕

Product	Prod. no.	GBP
Acrylic glass cover for FENDA Ø 45.5 cm		
○ white	**156100**	**39.00**

FENDA
70 CM, ROUND

Ø: 70 cm
H: 36 cm
Material: textile/steel

- Not suitable for Fenda Bow

Variant	Prod. no.	GBP
◐ black/copper	**1000580**	**113.00**
○ white	**1000579**	**100.00**

⊕


Product	Prod. no.	GBP
Acrylic glass cover, for FENDA Ø 70 cm		
○ white	**1000957**	**82.00**



156050 157

TENORA
CL, E27





IP20

220-240 V ~50/60 Hz
Material: steel/textile

SOCKET INSIDE 23 W

Base: 3XE27 | L: 14.8 cm

Variant	Prod. no.	GBP
● black	**156050**	**163.00**
○ white	**156051**	**163.00**

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F

Prod. no. 1005303 9.00 GBP


SMART

E27 | 9 W | 180°
806 lm | 2700 K | EEC = F

Prod. no. 1012471 14.00 GBP

SOPRANA
CL, E27





IP20

220-240 V ~50/60 Hz
Material: steel/textile

SOCKET INSIDE 60 W

Base: 3XE27


Variant	Prod. no.	GBP
● beige	**155373**	**180.00**

E27 | 13 W | 220°
1300 lm | 2700 K | EEC = F

Prod. no. 1005302 11.00 GBP

PLASTRA
CL, QPAR51





IP20

220-240 V ~50/60 Hz
Material: plaster/steel

SOCKET INSIDE 35 W

Base: 1xGU10

Variant	Prod. no.	GBP
○ white	**148004**	**58.00**


GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

C,L

Prod. no. 1005076 7.00 GBP

PLASTRA
CL, PHASE





C,L 110° 30000 h L70B50

220-240 V ~50/60 Hz | 350 mA
Total wattage: 15 W
Material: plaster/glass


LED INSIDE

3000 K
990 lm

Variant	Prod. no.	GBP
○ white	**148005**	**117.00**

PLASTRA 105
CL, E27





IP20

220-240 V ~50/60 Hz
Material: plaster/glass

SOCKET INSIDE 25 W

Base: 2xE27 max. Ø: 5.1 cm | L: 14 cm


Variant	Prod. no.	GBP
○ white	**148001**	**79.00**

E27 | 8 W | 240°
880 lm | 3000 K | EEC = E

C

Prod. no. 1005289 10.00 GBP

PLASTRA 104
CL, E27



IP20


220-240 V ~50/60 Hz
Material: plaster/glass

SOCKET INSIDE 25 W

Base: 2xE27 | max. Ø: 5.1 cm | L: 14 cm

Variant	Prod. no.	GBP
○ white	148002	73.00

FERA 25
CL, DALI



Dali Touch IP20 90° 30000 h L70B50

220-240 V ~50/60 Hz | 500 mA
Total wattage: 20 W
Material: aluminium


LED INSIDE CCT CRI 80

3000 K	4000 K
1580 lm	1650 lm

Variant	Prod. no.	GBP
● black	1002968	239.00
○ white	1002967	239.00

FERA 25
CL





IP20 100° 20000 h L70B50

220-240 V ~50/60 Hz | 550 mA
Total wattage: 23 W
Material: aluminium/polystyrene (PS)

LED INSIDE CRI 80

3000 K
1800 lm

Variant	Prod. no.	GBP
● black	1001939	176.00
○ white	161461	176.00


E27 | 8 W | 240°
880 lm | 3000 K | EEC = E

C

Prod. no. **1005289** **10.00 GBP**

DECONA 30
CL, PHASE





IP44 IK06 50000h L80B50 UGR 25

220-240 V ~50/60 Hz | 230 mA
Total wattage: 18 W
Material: aluminium/PC


LED INSIDE CCT CRI 90

	2700 K	3000 K
1008580	1560 lm	1560 lm
1008578	1450 lm	1450 lm
1008579	1530 lm	1530 lm
1008577	1600 lm	1600 lm

Variant	Prod. no.	GBP
black/gold 1560 lm	**1008580**	**105.00**
black 1450 lm	**1008578**	**105.00**
white/gold 1530 lm	**1008579**	**105.00**
white 1600 lm	**1008577**	**105.00**

DECONA 30
CL, PHASE





IP44 IK06 50000h L80B50 UGR 25


220-240 V ~50/60 Hz | 230 mA
Total wattage: 17 W
Material: aluminium/PC

LED INSIDE CCT CRI 90

	3000 K	4000 K
1008920	1680 lm	1760 lm
1008918	1650 lm	1710 lm
1008919	1710 lm	1800 lm
1008917	1900 lm	2000 lm

Variant	Prod. no.	GBP
black/gold 1680 lm	**1008920**	**105.00**
black 1650 lm	**1008918**	**105.00**
white/gold 1710 lm	**1008919**	**105.00**
white 1900 lm	**1008917**	**105.00**

DECONA 30
CL, SENSOR



IP44 IK06 50000h L80B50 UGR 25 FR


220-240 V ~50/60 Hz | 220 mA
Total wattage: 17 W
Material: aluminium/PC

LED INSIDE CCT CRI 90

	2700 K	3000 K
	1680 lm	1840 lm

Variant	Prod. no.	GBP
white	**1008925**	**121.00**

DECONA 30
CL, SENSOR



IP44 IK06 50000 h L80B50 UGR 25 FR

220-240 V ~50/60 Hz | 220 mA
Total wattage: 17 W
Material: aluminium/PC


LED INSIDE CCT CRI 90

3000 K	4000 K
1880 lm	1970 lm

Variant	Prod. no.	GBP
○ white	**1008926**	**121.00**

DECONA 42
CL, PHASE





C IP44 IK06 50000 h L80B50 UGR 25


220-240 V ~50/60 Hz | 300 mA
Total wattage: 23 W
Material: aluminium/PC

LED INSIDE CCT CRI 90

	2700 K	3000 K
1008584	2170 lm	2170 lm
1008582	2260 lm	2260 lm
1008583	2020 lm	2020 lm
1008581	2140 lm	2140 lm

Variant	Prod. no.	GBP
◐ black/gold 2170 lm	**1008584**	**130.00**
● black 2260 lm	**1008582**	**130.00**
◑ white/gold 2020 lm	**1008583**	**130.00**
○ white 2140 lm	**1008581**	**130.00**

DECONA 42
CL, SENSOR



IP44 IK06 50000 h L80B50 UGR 25 FR

220-240 V ~50/60 Hz | 305 mA
Total wattage: 23 W
Material: aluminium/PC

LED INSIDE CCT CRI 90

2700 K	3000 K
2450 lm	2710 lm


Variant	Prod. no.	GBP
○ white	**1008927**	**147.00**

⊕

Product	Prod. no.	GBP
Mounting frame 310 mm		
○ white	**1008585**	**52.00**
Suspension kit 1.50 m		
○ white	**1008588**	**25.00**

DECONA 42
CL, PHASE





C IP44 IK06 50000h L80B50 UGR 25


220-240 V ~50/60 Hz | 300 mA
Total wattage: 23 W
Material: aluminium/PC

LED INSIDE CCT CRI 90

	3000 K	4000 K
1008924	2550 lm	2680 lm
1008922	2540 lm	2680 lm
1008923	2600 lm	2730 lm
1008921	2770 lm	2930 lm

Variant	Prod. no.	GBP
black/gold 2550 lm	**1008924**	**130.00**
black 2540 lm	**1008922**	**130.00**
white/gold 2600 lm	**1008923**	**130.00**
white 2770 lm	**1008921**	**130.00**

DECONA 42
CL, SENSOR



IP44 IK06 50000h L80B50 UGR 25 FR

220-240 V ~50/60 Hz | 305 mA
Total wattage: 23 W
Material: aluminium/PC

LED INSIDE CCT CRI 90

	3000 K	4000 K
	2680 lm	2850 lm

Variant	Prod. no.	GBP
white	**1008928**	**147.00**

DECONA
MOUNTING FRAME 310 MM



Ø: 31.3 cm
H: 7.5 cm
Material: aluminium

Variant	Prod. no.	GBP
white	**1008585**	**52.00**

DECONA
MOUNTING FRAME 430 MM




Ø: 43.3 cm
H: 7.5 cm
Material: aluminium

Variant	Prod. no.	GBP
○ white	**1008586**	**60.00**

MOTUNA
CW, PHASE






C | IP20 | 130° | 50000 h L80B20

220-240 V ~50/60 Hz | 250 mA
Total wattage: 10 W
Power consumption: 8 W
Material: aluminium

MARONA
CL, PHASE





C,L | IP20 | 120° | 30000 h L70B50

220-240 V ~50/60 Hz | 430 mA
Total wattage: 15 W
Material: polymethylacrylate (PMMA)/steel

DECONA
SUSPENSION KIT 1,50 M



IK06 | 150 cm

Material: steel

Variant	Prod. no.	GBP
● black	**1008587**	**25.00**
○ white	**1008588**	**25.00**

LED INSIDE | CRI 90

	2700 K
1010365	1000 lm
1010217	750 lm

Variant	Prod. no.	GBP
black/gold 750 lm	**1010217**	**172.00**
white/gold 1000 lm	**1010365**	**172.00**

LED INSIDE

	3000 K
	1200 lm


Variant	Prod. no.	GBP
● grey	**155156**	**105.00**



OVANA 30
CL, LED, ZIGBEE, TW

NEW





IP20 | 02 | 105° | 50 000 h L80B10 | UGR 22 | 50

zigbee

220-240 V ~50/60 Hz | 250 mA
Total wattage: 10 W
Material: steel/polycarbonate (PE)


LED INSIDE | DIM TO WARM | CRI 90

	2200 K	6500 K
1012000 Down	1120 lm	1260 lm
1011999 Down	920 lm	1030 lm

Variant	Prod. no.	GBP
● black 920 lm	**1011999**	**231.00**
○ white 1120 lm	**1012000**	**231.00**

OVANA 44
CL, LED, ZIGBEE, TW





IP20 | 02 | 115° | 50000 h L80B10 | UGR 22 | 50 | zigbee

220-240 V ~50/60 Hz | 350 mA
Total wattage: 14 W
Material: steel/polycarbonate (PE)


LED INSIDE | DIM TO WARM | CRI 90

	2200 K	6500 K
1012002 Down	1710 lm	1900 lm
1012001 Down	1490 lm	1650 lm

Variant	Prod. no.	GBP
● black 1490 lm	**1012001**	**247.00**
○ white 1710 lm	**1012002**	**247.00**

OVANA 30
CL, LED, PHASE, CCT





C,L | IP20 | 02 | 105° | 50000 h L80B10 | UGR 22 | 50

220-240 V ~50/60 Hz | 250 mA
Total wattage: 11 W
Material: steel/polycarbonate (PE)


LED INSIDE | CCT | CRI 90

	2700 K	3000 K	4000 K
1011994 Down	1200 lm	1320 lm	1330 lm
1011993 Down	990 lm	1030 lm	1040 lm

Variant	Prod. no.	GBP
● black 990 lm	**1011993**	**197.00**
○ white 1200 lm	**1011994**	**197.00**

OVANA 44
CL, LED, PHASE, CCT





C,L | IP20 | 02 | 115° | 50000 h L80B10 | UGR 22 | 50

220-240 V ~50/60 Hz | 350 mA
Total wattage: 14 W
Material: steel/polycarbonate (PE)

LED INSIDE | CCT | CRI 90


	2700 K	3000 K	4000 K
1011996 Down	1860 lm	1870 lm	1900 lm
1011995 Down	1620 lm	1650 lm	1680 lm


Variant	Prod. no.	GBP
● black 1620 lm	**1011995**	**214.00**
○ white 1860 lm	**1011996**	**214.00**



GLENOS® 2.0
CL, 1,2 M, DALI, UGR22

NEW

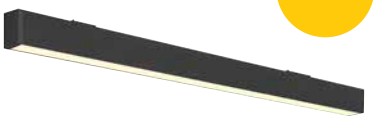



Dali | Touch | IP20 | 100 000 h L80B20 | UGR 22 | 50

200-240 V ~0/50/60 Hz | 450 mA
Total wattage: 17 W
Material: aluminium


LED INSIDE | CRI 80

1012165	4000 K 2100 lm
1012164	4000 K 2400 lm
1012163	3000 K 2050 lm
1012162	3000 K 2350 lm

Variant	Prod. no.	GBP
● black 2050 lm | 3000 K	**1012163**	**285.00**
● black 2100 lm | 4000 K	**1012165**	**285.00**
○ white 2350 lm | 3000 K	**1012162**	**285.00**
○ white 2400 lm | 4000 K	**1012164**	**285.00**

GLENOS® PRO
CL, 1,2 M, DALI, UGR19





Dali | Touch | IP20 | IK02 | 75° | 100 000 h L80B20 | UGR 19 | 30

220-240 V ~0/50/60 Hz | 750 mA
Total wattage: 30 W
Material: aluminium/plastic PC


LED INSIDE | CRI 90

1010520 **1010519**	4000 K 3900 lm
1010518 **1010517**	3000 K 3650 lm

Variant	Prod. no.	GBP
● black 3650 lm | 3000 K	**1010518**	**382.00**
● black 3900 lm | 4000 K	**1010520**	**382.00**
◑ white/black 3650 lm | 3000 K	**1010517**	**382.00**
◑ white/black 3900 lm | 4000 K	**1010519**	**382.00**


1010425 169

PANEL 60
CL, ROUND, PHASE



C,L · IP20 · IK02 · 90° · 50000 h L80B10 · UGR 19


220-240 V ~50/60 Hz | 750 mA
Total wattage: 29 W
Material: aluminium/steel

LED INSIDE · CCT · CRI 90

3000 K	4000 K
3050 lm	3300 lm

Variant	Prod. no.	GBP
○ white	**1010422**	**252.00**
● grey	**1010423**	**252.00**

PANEL 60
CL, ROUND, DALI



Dali · Touch · IP20 · IK02 · 90° · 50000 h L80B10 · UGR 19

220-240 V ~50/60 Hz | 750 mA
Total wattage: 29 W
Material: aluminium/steel

LED INSIDE · CCT · CRI 90

3000 K	4000 K
3050 lm	3300 lm

Variant	Prod. no.	GBP
○ white	**1010424**	**260.00**
● grey	**1010425**	**260.00**

SYMBOLS KEY

Recommendations
Displays accessories and recommended light bulbs for the chosen products

Mix & Match
Indicates products that can be combined

Energy efficiency class
"This light is suitable for bulbs with an energy efficiency rating of ..."

Protection classes
- Protection class I / Protective conductor
- Protection class II/ Protection by double or reinforced insulation
- Protection class III/ Protection by extra-low voltage

Dimmable with:
- **C** = Trailing-edge phase dimmer
- **L** = Leading-edge phase dimmer
- **Uni** = Universal dimmer
- **1–10 V**
- **Dali** = DALI bus system
- **Switch** = Switch/button or touch control on the light
- **Touch** = Simple, stepless operation; responds to touch

IP protection rating:
Indicates the suitability of electrical equipment for different environmental conditions.

IK impact resistance rating:
The IK impact resistance rating is a measure of the resistance of housings for electrical equipment to mechanical stress, especially impact stress.

Half-diffusion angle:
Describes the beam angle in degrees. The smaller the angle, the more concentrated the light will be.

Rotation and pivoting capacity in degrees:
- Rotation range
- Pivot range
- Gimballed

Preservation of luminous flux:
Describes the amount by which the luminous flux of an LED decreases during a specified period.

Unified Glare Rating:
The lower the UGR value, the lower the psychological glare.

Pendant cable length
in cm

Cable length:
Mains plugs, connectors and supply cables (with open cable end) in cm

Through-wiring possible

Shape of the installation opening

Specification of the installation depth

Drive-over capability of the product ensured

Weight-bearing capacity of the product up to the specified value in tonnes. Measurements based on installation in concrete.

Sea-air resistant coating

Independent converter:
Control equipment also for use outside of lights

Short-circuit protected safety control equipment

Light colour temperature in Kelvin (K)

Luminous flux in lumens (lm)

Dark Sky
Indicates that the light emits almost no light into the upper half-space (ULOR < 2 %). Reduces light pollution and ensures targeted, needs-based illumination of the usable area.

Primary/Replica
Indicates lights with integrated primary/replica function. A sensor light (primary) controls downstream lights (replica) via a switched phase, enabling simple, networked lighting control without additional bus or control systems.

Connected lighting:
Indicates smart products that use the following protocols:
- Zigbee®
- DALI
- Bluetooth

Allows the installation of electrical control equipment on materials whose flammability is not known.

CCT switch:
By means of an integrated CCT switch, the light colour can be changed from 2700 K, 3000 K, 4000 K to 6500 K during installation.

Dim-to-warm:
With dimmers, the light colour can be altered from cold white to warm white.

Indicates lights with RGB+W and RGB
(Red-Green-Blue + White and Red-Green-Blue)

Indicates lights with motion sensors
(Microwaves (MR) - Technology / Infrared / Radio)

Products with integrated LEDs

Products with light socket

KS Licht – Your lighting wholesaler in Essen

Contact, customer service and information for customers
BIG WHITE 2027

Directly linked to our product range, advice and project services:

In the KS Multi Brand Business online shop, you will find the latest products, new releases and special offers, as well as information to support you with advice, quotations and project management:

- Online stock availability check
- Catalogues, browsable catalogues and product links
- Technical data, tender specifications, light distribution curves and LDT files
- Easily find and order spare parts
- View your individual terms and conditions, delivery and payment terms
- Relevant product recommendations, variants and alternative products
- Direct contact with our sales team

Customer Information

All prices are net, plus statutory VAT. The retail prices quoted are recommended retail prices. Upon publication of this catalogue, previous price lists cease to be valid.
Illustrations, colours, shapes, designs and technical specifications are for illustrative purposes only and are not binding. Subject to changes and errors.
Goods are generally dispatched ex works, carriage forward.
For orders with a net value of less than €70.00, a minimum order surcharge of €8.00 will be applied.

Ordering & Delivery

When placing orders, please always specify the item number, colour and quantity. This reduces the need for follow-up enquiries and speeds up processing.
Express and direct deliveries are available on request.
Custom-made items, components assembled to the customer's specifications and lamps are excluded from exchange.
Our General Terms and Conditions apply and are available at www.ks-germany.com/de/agb.

Kontakt

KS Licht- und Elektrotechnik GmbH
Manderscheidtstraße 8 c
45141 Essen
Germany

Verkauf & Service
Tel.: +49 (0)201-89924-0
verkauf@ks-germany.com

Online
ks-light.co.uk
www.ks-germany.com

Pflichtangaben

KS Licht- und Elektrotechnik GmbH · Sitz der Gesellschaft: Essen · Geschäftsführer: Kai Becker
Registergericht: Amtsgericht Essen · Handelsregister: HRB 12736 · Steuer-Nr.: 111/5708/2689 ·
USt-IdNr.: DE190673411

KS Licht- und Elektrotechnik GmbH
Manderscheidtstraße 8 c
45141 Essen
Germany

Tel.: +49 (0)201-89924-0

B2B-Shop: **ks-light.co.uk**
Website: www.ks-germany.com
E-Mail: verkauf@ks-germany.com

Opening hours
Monday – Thursday 08:00 – 16:30
Friday 08:00 – 15:00