BIG WHITE®
2027

SLV LIGHTING CATALOGUE



PENDANT LIGHTS

INDOOR | PENDANT LIGHTS



SOCKET

HAVEN | 175



LED

QUIMERA | 177



SOCKET

MIX match

VARYT | 179





SOCKET

WUD | 181



SOCKET

SUN | 182



SOCKET

OLYPSO | 183



SOCKET

MAGICO |185



LED

NUMINOS® | 186–193



LED

GRIP! S | 195



LED

MOTUNA | 197



LED

OVANA 44 | 197



LED

SLVconnect®
OVANA 44 | 197



LED

MEDO® 2 SLIM |
198–201



LED

MEDO® HYVE |
202–203



LED

MEDO® RING |
206–207



LED

MEDO® PRO | 208–213



LED

SOCKET

LALU® SET | 216–221



LED

DYSKO | 221



LED

ONE FLAT | 223



LED

ONE VERTICAL | 224



LED

ONE CUBE | 225



LED

ONE CUBE UP/DOWN |
225



LED

ONE | 227–229



LED

ONE DOUBLE | 231



LED

ONE TRIPLE | 231



LED

ONE LINEAR | 233



LED

LINIUS | 234–237



SOCKET

PANTILO ROPE | 239



SOCKET

PANTILO OVAL | 240



SOCKET

PANTILO | 240



SOCKET

PANTILO CONVEX | 241



SOCKET

LIGHT EYE® | 243



SOCKET

ENOLA® 2.0 | 244–245



SOCKET

ASTO TUBE | 247



LED

GLENOS® 2.0 | 248–249



LED

GLENOS® PRO | 249



LED

WORKLIGHT PRO | 251



LED

WORKLIGHT | 251

LED

PANEL | 253



LED

GRIP! FLAT | 255



LED

OCULUS | 257



SOCKET

FITU | 258



SOCKET

FENDA | 260–261



LED

HELIA | 264–265



SOCKET

PARA CONE | 265



SOCKET

PHELIA | 267



SOCKET

FORCHINI | 268–269



SOCKET

ROTOBALL | 271



SOCKET

PARA DOME | 273




SOCKET

PARA 380 PD | 273



HAVEN 35
PD, E27

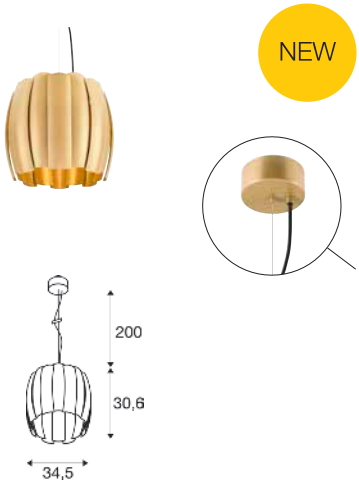

IP20 IK02 200 cm

220-240 V ~50/60 Hz
Material: steel

SOCKET INSIDE 40 W

Base: 1xE27

Variant	Prod. no.	GBP
● black	1011684	247.00
○ white	1011685	247.00
● gold	1011686	256.00

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F

Prod. no. 1005303 9.00 GBP

HAVEN 50
PD, E27



IP20 IK02 200 cm

220-240 V ~50/60 Hz
Material: steel

SOCKET INSIDE 40 W

Base: 1xE27

Variant	Prod. no.	GBP
● black	1011681	302.00
○ white	1011682	302.00
● gold	1011683	310.00

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F


Prod. no. 1005303 9.00 GBP



1008033 177



QUIMERA
PD, PHASE

GERMAN DESIGN AWARD WINNER 2025





IP20 | IK03 | 360° | 50000 h L80B50 | 150 cm

220-240 V ~50/60 Hz | 700 mA
Total wattage: 8.5 W
Material: aluminium/glass

LED INSIDE | CCT | CRI 90

	2700 K	3000 K
Indirect	330 lm	350 lm


Variant	Prod. no.	GBP
brass	**1008033**	**323.00**
dark bronze	**1008032**	**323.00**
dark copper	**1008034**	**323.00**



1008118 + 1008023 179

VARYT
PD, E14





IP20 IK02 150 cm

220-240 V ~50/60 Hz
Material: aluminium

SOCKET INSIDE 6 W

Base: 1xE14 | max. Ø: 11 cm | L: 3.8 cm

Variant	Prod. no.	GBP
black	1008114	96.00
white	1008115	96.00
brass	1008117	121.00
chrome	1008116	105.00
copper	1008118	121.00

E14 | 4 W | 320°
380 lm | 2700 K | EEC = F

C,L

Prod. no.: **1005284** **6.00 GBP**

Product	Prod. no.	GBP
Glass shade for PD, WL, CL, TL		
smoky grey	1007858	69.00
white	1007859	61.00
white	1007860	66.00
amber	1008023	69.00
Glass shade for CL, WL, TL, PD		
white	1008119	52.00

VARYT
GLOBE GLASS SHADE



IK02

Ø: 12 cm
H: 12.8 cm
Material: glass

Variant	Prod. no.	GBP
white	1008119	52.00

VARYT
DIAMOND GLASS SHADE



IK02

Ø: 12 cm
H: 12.7 cm
Material: glass

Variant	Prod. no.	GBP
smoky grey	1007858	69.00
amber	1008023	69.00

VARYT
LINED GLASS SHADE



IK02

Ø: 12 cm
H: 13 cm
Material: glass

Variant	Prod. no.	GBP
white	1007859	61.00

VARYT
PLEATED GLASS SHADE



IK02

Ø: 11.5 cm
H: 13.5 cm
Material: glass

Variant	Prod. no.	GBP
white	1007860	66.00



1008047 181

WUD
PD, E27, HALF ROUND





IP20 | 180 cm | 180 cm

220-240 V ~50/60 Hz
Material: steel/wood

- open cable end

SOCKET INSIDE | 60 W

Base: 1xE27

Variant	Prod. no.	GBP
natural	**1008045**	**155.00**


E27 | 8 W | 330°
400 lm | 1900 K |

Prod. no. **1008159** **77.00 GBP**

Product	Prod. no.	GBP
Fitu | Single ceiling rosette		
black	**132600**	**23.00**
white	**132601**	**23.00**
gold	**1002163**	**26.00**
chrome	**132605**	**26.00**
1-phase light adapter		
black	**143120**	**14.00**
white	**143121**	**14.00**
grey	**143124**	**14.00**
3-phase light adapter		
black	**145990**	**18.00**
grey	**145994**	**18.00**
white	**1001542**	**18.00**
Recessed ceiling rosette		
black	**1004674**	**21.00**
white	**1004675**	**21.00**
Surface-mounted ceiling rosette		
black	**1004744**	**31.00**

WUD
PD, E27, CLYLINDRICAL





IP20 | 180 cm | 180 cm

220-240 V ~50/60 Hz
Material: steel/wood

- open cable end

SOCKET INSIDE | 60 W

Base: 1xE27

Variant	Prod. no.	GBP
natural	**1008047**	**126.00**

E27 | 6 W | 330°
570 lm | 2200 K | EEC = F

Prod. no. **1008152** **55.00 GBP**

Product	Prod. no.	GBP
Fitu | Single ceiling rosette		
black	**132600**	**23.00**
white	**132601**	**23.00**
gold	**1002163**	**26.00**
chrome	**132605**	**26.00**
1-phase light adapter		
black	**143120**	**14.00**
white	**143121**	**14.00**
grey	**143124**	**14.00**
3-phase light adapter		
black	**145990**	**18.00**
grey	**145994**	**18.00**
white	**1001542**	**18.00**
Recessed ceiling rosette		
black	**1004674**	**21.00**
white	**1004675**	**21.00**
Surface-mounted ceiling rosette		
black	**1004744**	**31.00**

SUN 20
PD, E27



IP20 400

220-240 V ~50/60 Hz
Material: aluminium

• open cable end

SOCKET INSIDE 40 W

Base: 1xE27 | max. Ø: 4.5 cm | L: 12 cm


Variant	Prod. no.	GBP
● black	**1008139**	**88.00**
● gold	**1008138**	**88.00**

E27 | 8 W | 240°
880 lm | 3000 K | EEC = E

Prod. no. 1005289 10.00 GBP

Product	Prod. no.	GBP
Fitu | Single ceiling rosette		
● black	**132600**	**23.00**
○ white	**132601**	**23.00**
● gold	**1002163**	**26.00**
◑ chrome	**132605**	**26.00**
1-phase light adapter		
● black	**143120**	**14.00**
○ white	**143121**	**14.00**
● grey	**143124**	**14.00**
3-phase light adapter		
● black	**145990**	**18.00**
● grey	**145994**	**18.00**
○ white	**1001542**	**18.00**

SUN 30
PD, E27



IP20 400

220-240 V ~50/60 Hz
Material: aluminium

• open cable end

SOCKET INSIDE 40 W

Base: 1xE27 | max. Ø: 4.5 cm | L: 22 cm


Variant	Prod. no.	GBP
● black	**1008137**	**130.00**
● gold	**1008136**	**130.00**

E27 | 8 W | 240°
880 lm | 3000 K | EEC = E

Prod. no. 1005289 10.00 GBP

Product	Prod. no.	GBP
Fitu | Single ceiling rosette		
● black	**132600**	**23.00**
○ white	**132601**	**23.00**
● gold	**1002163**	**26.00**
◑ chrome	**132605**	**26.00**
1-phase light adapter		
● black	**143120**	**14.00**
○ white	**143121**	**14.00**
● grey	**143124**	**14.00**
3-phase light adapter		
● black	**145990**	**18.00**
● grey	**145994**	**18.00**
○ white	**1001542**	**18.00**

SUN 40
PD, E27

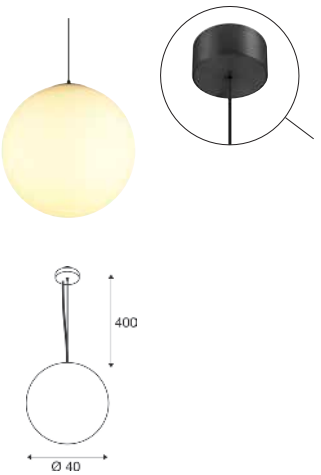

IP20 400 cm

220-240 V ~50/60 Hz

SOCKET INSIDE 40 W

Base: 1xE27 | max. Ø: 4.5 cm | L: 22 cm


Variant	Prod. no.	GBP
● black	**1008534**	**168.00**
● gold	**1008533**	**168.00**

E27 | 14 W | 240°
1520 lm | 3000 K | EEC = E

Prod. no. 1005307 11.00 GBP

OLYPSO 40
PD, E27





IP20 400 cm

220-240 V ~50/60 Hz
Material: steel/glass

SOCKET INSIDE 40 W

Base: 1xE27 | max. Ø: 8 cm | L: 12 cm


Variant	Prod. no.	GBP
● black	**1010413**	**180.00**
● gold	**1010414**	**184.00**

E27 | 8 W | 240°
880 lm | 3000 K | EEC = E

Prod. no.: 1005289 10.00 GBP

OLYPSO 50
PD, E27





IP20 400 cm

220-240 V ~50/60 Hz
Material: steel/glass

SOCKET INSIDE 40 W

Base: 1xE27 | max. Ø: 12 cm | L: 16 cm


Variant	Prod. no.	GBP
● black	**1010415**	**222.00**
● gold	**1010416**	**226.00**

E27 | 14 W | 240°
1520 lm | 3000 K | EEC = E

Prod. no.: 1005307 11.00 GBP


1009136 185

MAGICO 20
PD, E27



IP20 IK02 180 cm

220-240 V ~50/60 Hz
Material: aluminium

- open cable end

SOCKET INSIDE 10 W

Base: 1xE27

Variant	Prod. no.	GBP
black/gold	1008502	163.00
black	1008500	163.00
white	1008501	163.00
aluminium	1009135	168.00

E27 | 8 W | 320°
700 lm | 2500 K | EEC = F


C,L

Prod. no. 1005265 23.00 GBP

Product	Prod. no.	GBP
Fitu | Single ceiling rosette		
black	132600	23.00
white	132601	23.00
1-phase light adapter		
black	143120	14.00
white	143121	14.00
grey	143124	14.00
3-phase light adapter		
black	145990	18.00
grey	145994	18.00
white	1001542	18.00
Recessed ceiling rosette		
black	1004674	21.00
white	1004675	21.00
Surface-mounted ceiling rosette		
black	1004744	31.00

MAGICO 38
PD, E27





IP20 IK02 180 cm

220-240 V ~50/60 Hz
Material: aluminium

- open cable end

SOCKET INSIDE 10 W

Base: 1xE27

Variant	Prod. no.	GBP
black/gold	1008505	172.00
black	1008503	172.00
white	1008504	172.00
aluminium	1009136	180.00

E27 | 8 W | 320°
700 lm | 2500 K | EEC = F


C,L

Prod. no. 1005265 23.00 GBP

Product	Prod. no.	GBP
Fitu | Single ceiling rosette		
black	132600	23.00
white	132601	23.00
1-phase light adapter		
black	143120	14.00
white	143121	14.00
grey	143124	14.00
3-phase light adapter		
black	145990	18.00
grey	145994	18.00
white	1001542	18.00
Recessed ceiling rosette		
black	1004674	21.00
white	1004675	21.00
Surface-mounted ceiling rosette		
black	1004744	31.00

MAGICO 55
PD, E27





IP20 IK02 180 cm

220-240 V ~50/60 Hz
Material: aluminium

- open cable end

SOCKET INSIDE 10 W

Base: 1xE27

Variant	Prod. no.	GBP
black/gold	1008508	180.00
black	1008507	180.00
white	1008506	180.00
aluminium	1009137	184.00

E27 | 8 W | 320°
700 lm | 2500 K | EEC = F


C,L

Prod. no. 1005265 23.00 GBP

Product	Prod. no.	GBP
Fitu | Single ceiling rosette		
black	132600	23.00
white	132601	23.00
1-phase light adapter		
black	143120	14.00
white	143121	14.00
grey	143124	14.00
3-phase light adapter		
black	145990	18.00
grey	145994	18.00
white	1001542	18.00
Recessed ceiling rosette		
black	1004674	21.00
white	1004675	21.00
Surface-mounted ceiling rosette		
black	1004744	31.00

NUMINOS® S
PD







220-240 V ~50/60 Hz | 200 mA
Total wattage: 8 W
Material: aluminium/PC

Variant	GBP
All S versions	**121.00**
All S versions DALI	**172.00**




Note:
Decorative ring also available in white, gold and copper

Product	Prod. no.	GBP
Front ring S		
○ white	**1006167**	**2.00**
● copper	**1008140**	**8.00**
● gold	**1008144**	**8.00**



● black




○ white

					Prod. no.	
C	2700 K	950 lm	24°	16	**1004146**	
			36°	16	**1004147**	
			60°	19	**1004148**	
	3000 K	1050 lm	24°	16	**1004154**	
			36°	16	**1004155**	
			60°	19	**1004156**	
	4000 K	1100 lm	24°	16	**1004162**	
			36°	16	**1004163**	
			60°	19	**1004164**	
Dali Touch	2700 K	950 lm	24°	16	**1004434**	
			36°	16	**1004435**	
			60°	19	**1004436**	
	3000 K	1050 lm	24°	16	**1004442**	
			36°	16	**1004443**	
			60°	19	**1004444**	
	4000 K	1100 lm	24°	16	**1004450**	
			36°	16	**1004451**	
			60°	19	**1004452**	
C	2700 K	950 lm	24°	16	**1004150**	
			36°	16	**1004151**	
			60°	19	**1004152**	
	3000 K	1050 lm	24°	16	**1004158**	
			36°	16	**1004159**	
			60°	19	**1004160**	
	4000 K	1100 lm	24°	16	**1004166**	
			36°	16	**1004167**	
			60°	19	**1004168**	
Dali Touch	2700 K	950 lm	24°	16	**1004438**	
			36°	16	**1004439**	
			60°	19	**1004440**	
	3000 K	1050 lm	24°	16	**1004446**	
			36°	16	**1004447**	
			60°	19	**1004448**	
	4000 K	1100 lm	24°	16	**1004454**	
			36°	16	**1004455**	
			60°	19	**1004456**	

NUMINOS® M
PD









220-240 V ~50/60 Hz | 350 mA
Total wattage: 14 W
Material: aluminium/PC

Variant	GBP
All M versions	**138.00**
All M versions DALI	**180.00**


Note:
Decorative ring also available in white, gold and copper



Product	Prod. no.	GBP
Front ring M		
○ white	**1006168**	**3.00**
● copper	**1008141**	**8.00**
● gold	**1008145**	**8.00**



● black




○ white

					Prod. no.	
C	2700 K	1750 lm	24°	16	**1004242**	
			36°	16	**1004243**	
			60°	22	**1004244**	
	3000 K	1800 lm	24°	16	**1004250**	
			36°	16	**1004251**	
			60°	22	**1004252**	
	4000 K	1950 lm	24°	16	**1004258**	
			36°	16	**1004259**	
			60°	22	**1004260**	
Dali Touch	2700 K	1750 lm	24°	16	**1004530**	
			36°	16	**1004531**	
			60°	22	**1004532**	
	3000 K	1800 lm	24°	16	**1004538**	
			36°	16	**1004539**	
			60°	22	**1004540**	
	4000 K	1950 lm	24°	16	**1004546**	
			36°	16	**1004547**	
			60°	22	**1004548**	
C	2700 K	1750 lm	24°	16	**1004246**	
			36°	16	**1004247**	
			60°	22	**1004248**	
	3000 K	1800 lm	24°	16	**1004254**	
			36°	16	**1004255**	
			60°	22	**1004256**	
	4000 K	1950 lm	24°	16	**1004262**	
			36°	16	**1004263**	
			60°	22	**1004264**	
Dali Touch	2700 K	1750 lm	24°	16	**1004534**	
			36°	16	**1004535**	
			60°	22	**1004536**	
	3000 K	1800 lm	24°	16	**1004542**	
			36°	16	**1004543**	
			60°	22	**1004544**	
	4000 K	1950 lm	24°	16	**1004550**	
			36°	16	**1004551**	
			60°	22	**1004552**	

NUMINOS® L
PD






IP20 | 50 000 h L90B10 | 250 cm | 78

INSIDE | CRI 90

220-240 V ~50/60 Hz | 500 mA
Total wattage: 20 W
Material: aluminium/PC



● black



○ white

Variant	GBP
All L versions	**151.00**
All L versions DALI	**197.00**

Note:
Decorative ring also available in white, gold and copper




Product	Prod. no.	GBP
Front ring L		
○ white	**1006169**	**3.00**
● copper	**1008142**	**10.00**
● gold	**1008146**	**10.00**

					Prod. no.	
C	2700 K	2300 lm	24°	16	**1004338**	
			36°	16	**1004339**	
			60°	19	**1004340**	
	3000 K	2400 lm	24°	16	**1004346**	
			36°	16	**1004347**	
			60°	19	**1004348**	
	4000 K	2600 lm	24°	16	**1004354**	
			36°	16	**1004355**	
			60°	19	**1004356**	
Dali Touch	2700 K	2300 lm	24°	16	**1004626**	
			36°	16	**1004627**	
			60°	19	**1004628**	
	3000 K	2400 lm	24°	16	**1004634**	
			36°	16	**1004635**	
			60°	19	**1004636**	
	4000 K	2600 lm	24°	16	**1004642**	
			36°	16	**1004643**	
			60°	19	**1004644**	
C	2700 K	2300 lm	24°	16	**1004342**	
			36°	16	**1004343**	
			60°	19	**1004344**	
	3000 K	2400 lm	24°	16	**1004350**	
			36°	16	**1004351**	
			60°	19	**1004352**	
	4000 K	2600 lm	24°	16	**1004358**	
			36°	16	**1004359**	
			60°	19	**1004360**	
Dali Touch	2700 K	2300 lm	24°	16	**1004630**	
			36°	16	**1004631**	
			60°	19	**1004632**	
	3000 K	2400 lm	24°	16	**1004638**	
			36°	16	**1004639**	
			60°	19	**1004640**	
	4000 K	2600 lm	24°	16	**1004646**	
			36°	16	**1004647**	
			60°	19	**1004648**	

NUMINOS® XL
PD









220-240 V ~50/60 Hz | 700 mA
Total wattage: 27 W
Material: aluminium/PC

Variant	GBP
All XL versions	**172.00**
All XL versions DALI	**218.00**


Note:
Decorative ring also available in white, gold and copper



Product	Prod. no.	GBP
Front ring XL		
○ white	**1006170**	**4.00**
● copper	**1008143**	**10.00**
● gold	**1008147**	**10.00**




● black




○ white

					Prod. no.	
C	2700 K	3550 lm	24°	16	**1005705**	
			36°	16	**1005706**	
		3150 lm	60°	22	**1005707**	
	3000 K	3550 lm	24°	16	**1005711**	
			36°	16	**1005712**	
		3150 lm	60°	22	**1005713**	
	4000 K	3900 lm	24°	16	**1005717**	
			36°	16	**1005718**	
		3500 lm	60°	22	**1005719**	
Dali Touch	2700 K	3550 lm	24°	16	**1005777**	
			36°	16	**1005778**	
		3150 lm	60°	22	**1005779**	
	3000 K	3550 lm	24°	16	**1005783**	
			36°	16	**1005784**	
		3150 lm	60°	22	**1005785**	
	4000 K	3900 lm	24°	16	**1005789**	
			36°	16	**1005790**	
		3500 lm	60°	22	**1005791**	
C	2700 K	3550 lm	24°	16	**1005708**	
			36°	16	**1005709**	
		3150 lm	60°	22	**1005710**	
	3000 K	3550 lm	24°	16	**1005714**	
			36°	16	**1005715**	
		3150 lm	60°	22	**1005716**	
	4000 K	3900 lm	24°	16	**1005720**	
			36°	16	**1005721**	
		3500 lm	60°	22	**1005722**	
Dali Touch	2700 K	3550 lm	24°	16	**1005780**	
			36°	16	**1005781**	
		3150 lm	60°	22	**1005782**	
	3000 K	3550 lm	24°	16	**1005786**	
			36°	16	**1005787**	
		3150 lm	60°	22	**1005788**	
	4000 K	3900 lm	24°	16	**1005792**	
			36°	16	**1005793**	
		3500 lm	60°	22	**1005794**	

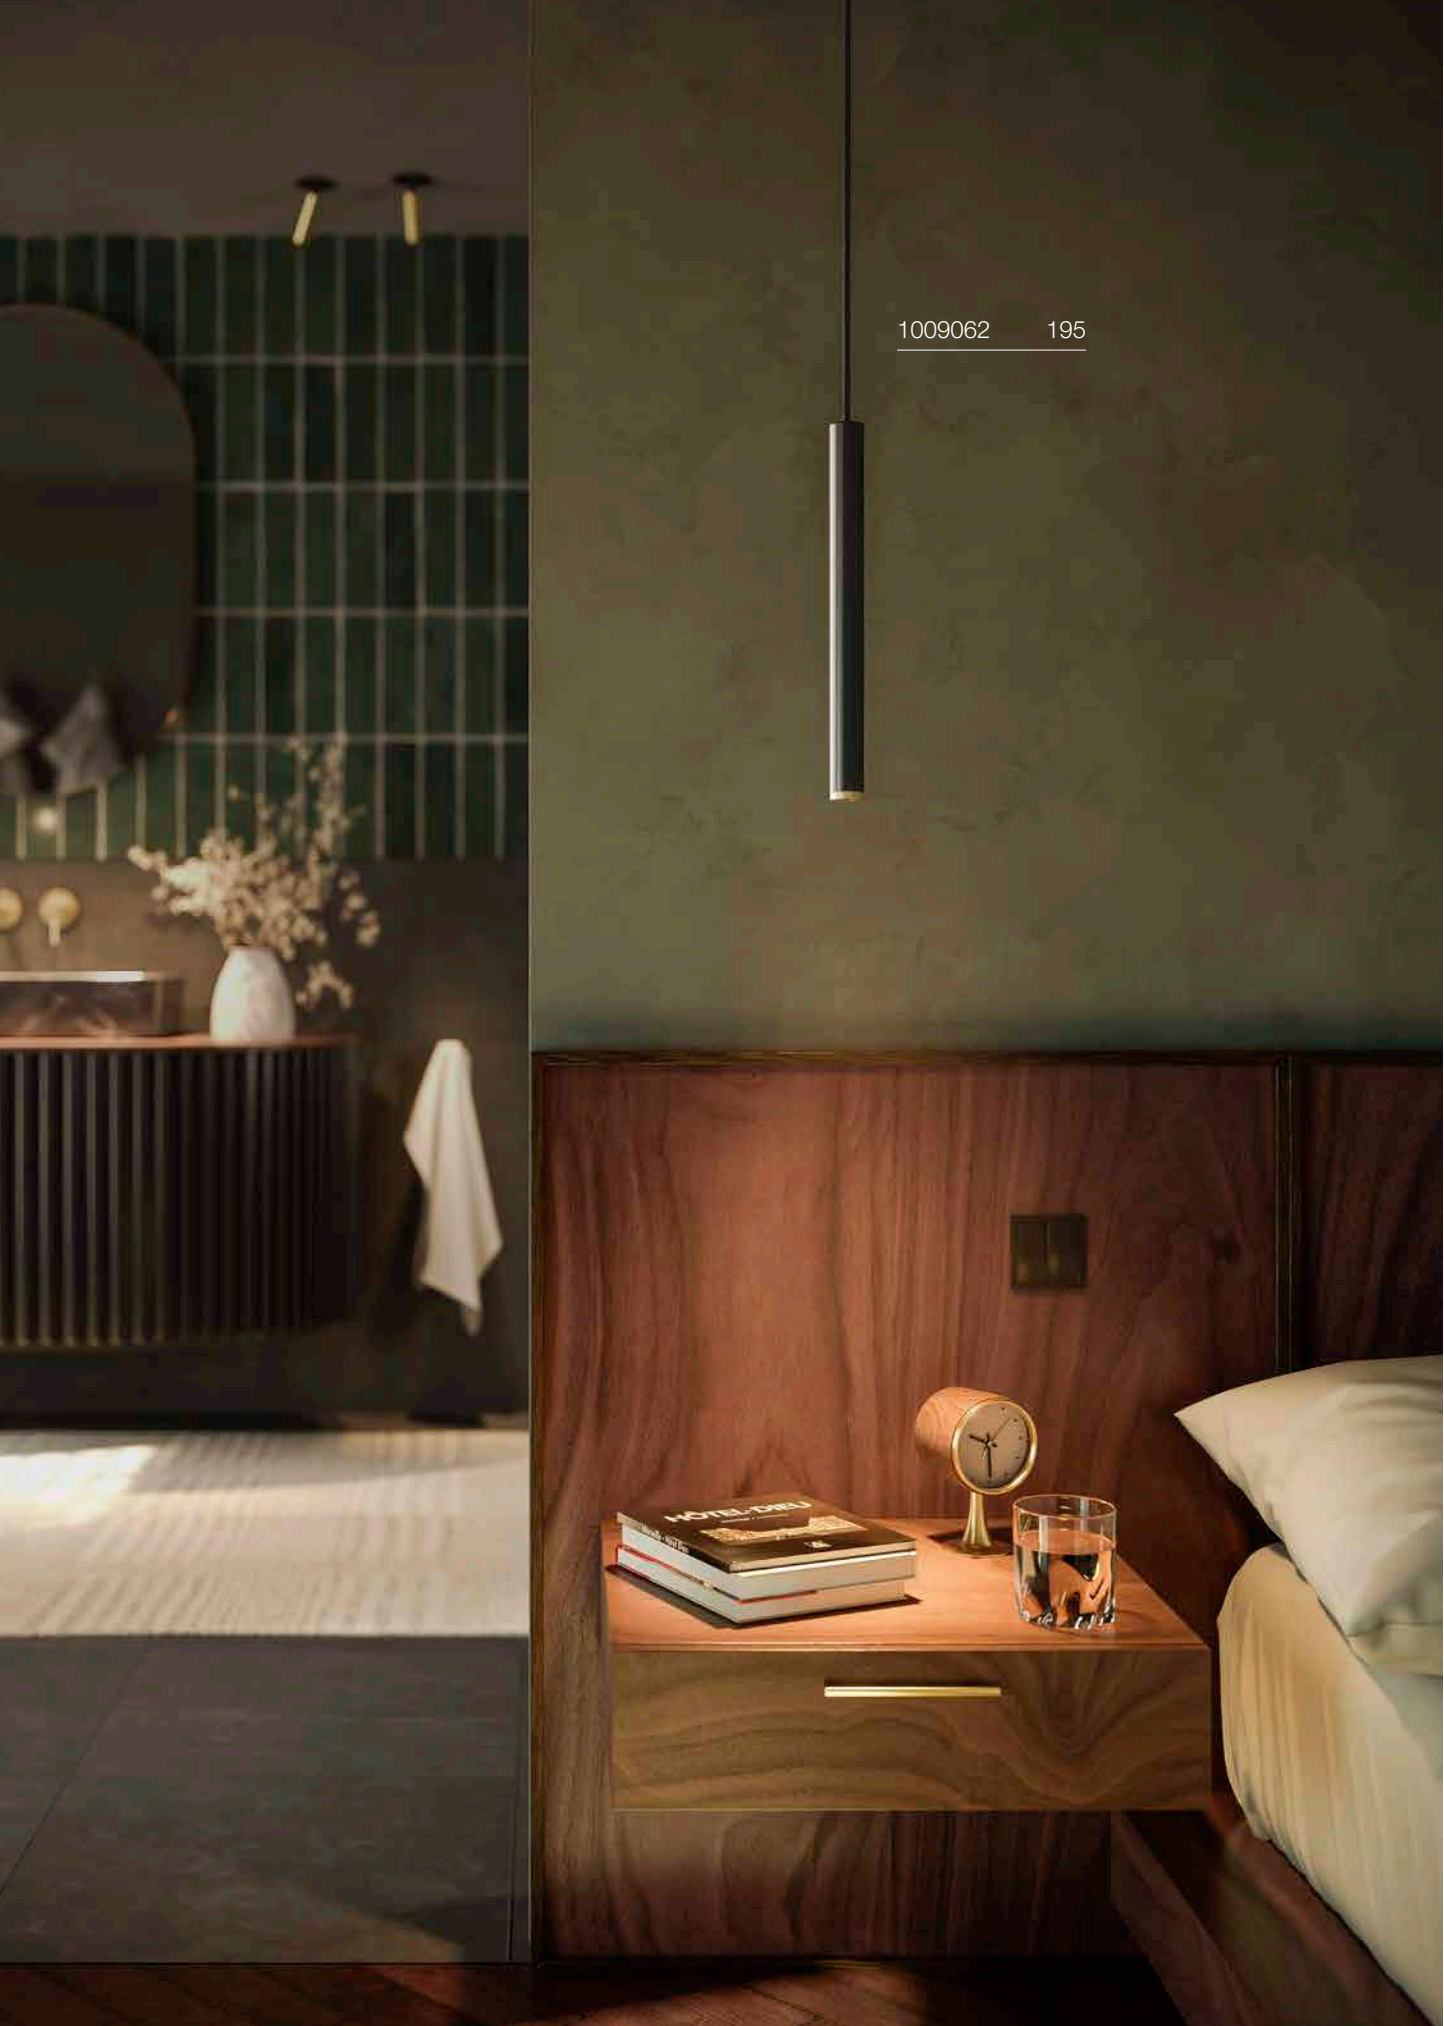
1009062 195
HÔTEL-DIEU

GRIP! S
PD, PHASE, Ø 3,0 CM





C,L · IP20 · IK02 · 29° · 50000 h L80B10 · 200 cm · UGR 25

220-240 V ~50/60 Hz | 250 mA
Total wattage: 10 W
Material: steel

- Honeycomb accessories included
- Including external LED driver

LED INSIDE · CRI 90

1009060 **1009062** **1009064** **1009066**	2700 K 590 lm
1009061 **1009063** **1009065** **1009067**	3000 K 620 lm

Variant	Prod. no.	GBP
black/gold 590 lm | 2700 K	**1009062**	**138.00**
black/gold 620 lm | 3000 K	**1009063**	**138.00**
white/black 590 lm | 2700 K	**1009060**	**138.00**
white/black 620 lm | 3000 K	**1009061**	**138.00**
gold/black 590 lm | 2700 K	**1009066**	**138.00**
gold/black 620 lm | 3000 K	**1009067**	**138.00**
bronze/black 590 lm | 2700 K	**1009064**	**138.00**
bronze/black 620 lm | 3000 K	**1009065**	**138.00**

⊕

Product	Prod. no.	GBP
Decorative ring, white		
black	**1011829**	**16.00**
white	**1011830**	**16.00**
gold	**1011831**	**16.00**
nickel	**1011832**	**16.00**
HONEYCOMB + Spacer		
black	**1011837**	**8.00**



MOTUNA
PD, PHASE



C · IP20 · 130° · 50000 h L80B20 · 250 cm

220-240 V ~50/60 Hz | 250 mA
Total wattage: 10 W
Material: aluminium

LED INSIDE · CRI 90

	2700 K
1010216	750 lm
1010366	1000 lm

Variant	Prod. no.	GBP
black/gold 750 lm	**1010216**	**189.00**
white/gold 1000 lm	**1010366**	**189.00**

OVANA 44
PD, LED, PHASE, CCT



C,L · IP20 · IK02 · 115° · 50000 h L80B10 · 200 cm · UGR 22 · 50

220-240 V ~50/60 Hz | 350 mA
Total wattage: 14 W
Material: steel/polycarbonate (PE)

LED INSIDE · CCT · CRI 90

	2700 K	3000 K	4000 K
1011991 Down	1620 lm	1650 lm	1680 lm
1011992 Down	1860 lm	1870 lm	1900 lm

Variant	Prod. no.	GBP
black 1620 lm	**1011991**	**247.00**
white 1860 lm	**1011992**	**247.00**

SLVconnect® OVANA 44
PD, LED, ZIGBEE, TW



IP20 · IK02 · 115° · 50000 h L80B10 · 200 cm · UGR 22 · 50 · zigbee

220-240 V ~50/60 Hz | 350 mA
Total wattage: 14 W
Material: steel/polycarbonate (PE)

LED INSIDE · TW · CRI 90


	2200 K - 6500 K
1011997 Down	1490 lm - 1650 lm
1011998 Down	1710 lm - 1900 lm

Variant	Prod. no.	GBP
black 1490 lm	**1011997**	**285.00**
white 1710 lm	**1011998**	**285.00**



MEDO® 2.0 SLIM 30
CL, PHASE

NEW





220-240 V ~50/60 Hz | 200 mA
Total wattage: 8 W
Material: aluminium/steel



	3000 K	4000 K
Down	1000 lm	1000 lm


Variant	Prod. no.	GBP
● black	**1011693**	**201.00**
○ white	**1011694**	**201.00**

⊕

Product	Prod. no.	GBP
Pendant suspension 1.5 m central		
● black	**1011779**	**52.00**
○ white	**1011780**	**52.00**
Pendant suspension 5 m central		
● black	**1011781**	**92.00**
○ white	**1011782**	**92.00**
Pendant suspension 3 m parallel		
● black	**1011783**	**78.00**
○ white	**1011784**	**78.00**

MEDO® 2.0 SLIM 40
CL, PHASE

NEW



220-240 V ~50/60 Hz | 400 mA
Total wattage: 15.5 W
Material: aluminium/steel

	3000 K	4000 K
Down	1900 lm	1900 lm

Variant	Prod. no.	GBP
● black	1011695	239.00
○ white	1011696	239.00

Product	Prod. no.	GBP
Pendant suspension 1.5 m central		
● black	1011779	52.00
○ white	1011780	52.00
Pendant suspension 5 m central		
● black	1011781	92.00
○ white	1011782	92.00
Pendant suspension 3 m parallel		
● black	1011783	78.00
○ white	1011784	78.00

MEDO® 2.0 SLIM 60
CL, PHASE

NEW



220-240 V ~50/60 Hz | 900 mA
Total wattage: 35 W
Material: aluminium/steel


	3000 K	4000 K
Down	4200 lm	4200 lm

Variant	Prod. no.	GBP
● black	1011697	394.00
○ white	1011698	394.00

Product	Prod. no.	GBP
Pendant suspension 1.5 m central		
● black	1011779	52.00
○ white	1011780	52.00
Pendant suspension 5 m central		
● black	1011781	92.00
○ white	1011782	92.00
Pendant suspension 3 m parallel		
● black	1011783	78.00
○ white	1011784	78.00

MEDO® 2.0 SLIM 80
CL, PHASE

NEW



220-240 V ~50/60 Hz | 1200 mA
Total wattage: 45 W
Material: aluminium/steel

	3000 K	4000 K
Down	5900 lm	5900 lm

Variant	Prod. no.	GBP
● black	1011699	579.00
○ white	1011700	579.00


Product	Prod. no.	GBP
Pendant suspension 1.5 m central		
● black	1011779	52.00
○ white	1011780	52.00
Pendant suspension 5 m central		
● black	1011781	92.00
○ white	1011782	92.00
Pendant suspension 3 m parallel		
● black	1011783	78.00
○ white	1011784	78.00



MEDO® 2.0 SLIM 30
CL, DALI

NEW





Dali Touch IP20 IK03 85° 100 000 h L80B10 UGR 19

220-240 V ~0/50/60 Hz | 200 mA
Total wattage: 8.6 W
Material: aluminium/steel

LED INSIDE CCT CRI 90

	3000 K	4000 K
Down	1000 lm	1000 lm

Variant	Prod. no.	GBP
● black	**1011701**	**243.00**
○ white	**1011702**	**243.00**

⊕

Product	Prod. no.	GBP
Pendant suspension 1.5 m central		
● black	**1011779**	**52.00**
○ white	**1011780**	**52.00**
Pendant suspension 5 m central		
● black	**1011781**	**92.00**
○ white	**1011782**	**92.00**
Pendant suspension 3 m parallel		
● black	**1011783**	**78.00**
○ white	**1011784**	**78.00**

MEDO® 2.0 SLIM 40
CL, DALI



Dali Touch IP20 IK03 85° 100 000 h L80B10 UGR 19

220-240 V ~0/50/60 Hz | 400 mA
Total wattage: 15.5 W
Material: aluminium/steel

LED INSIDE CCT CRI 90

Down	3000 K	4000 K
	1900 lm	1900 lm

Variant	Prod. no.	GBP
● black	1011703	268.00
○ white	1011704	268.00

⊕

Product	Prod. no.	GBP
Pendant suspension 1.5 m central		
● black	1011779	52.00
○ white	1011780	52.00
Pendant suspension 5 m central		
● black	1011781	92.00
○ white	1011782	92.00
Pendant suspension 3 m parallel		
● black	1011783	78.00
○ white	1011784	78.00

MEDO® 2.0 SLIM 60
CL, DALI



Dali Touch IP20 IK03 85° 100 000 h L80B10 UGR 19

220-240 V ~0/50/60 Hz | 900 mA
Total wattage: 34 W
Material: aluminium/steel

LED INSIDE CCT CRI 90

Down	3000 K	4000 K
	4200 lm	4200 lm

Variant	Prod. no.	GBP
● black	1011705	420.00
○ white	1011706	420.00

⊕

Product	Prod. no.	GBP
Pendant suspension 1.5 m central		
● black	1011779	52.00
○ white	1011780	52.00
Pendant suspension 5 m central		
● black	1011781	92.00
○ white	1011782	92.00
Pendant suspension 3 m parallel		
● black	1011783	78.00
○ white	1011784	78.00

MEDO® 2.0 SLIM 80
CL, DALI



Dali Touch IP20 IK03 85° 100 000 h L80B10 UGR 19

200-240 V ~0/50/60 Hz | 1200 mA
Total wattage: 45 W
Material: aluminium/steel

LED INSIDE CCT CRI 90

Down	3000 K	4000 K
	5900 lm	5900 lm

Variant	Prod. no.	GBP
● black	1011707	604.00
○ white	1011708	604.00


⊕

Product	Prod. no.	GBP
Pendant suspension 1.5 m central		
● black	1011779	52.00
○ white	1011780	52.00
Pendant suspension 5 m central		
● black	1011781	92.00
○ white	1011782	92.00
Pendant suspension 3 m parallel		
● black	1011783	78.00
○ white	1011784	78.00

MEDO® 2.0 HYVE 40
CL, PHASE

NEW





C · IP20 · 80° · 60 000 h L80B10 · UGR 16

220-240 V ~50/60 Hz | 400 mA
Total wattage: 16 W
Material: aluminium/steel

LED INSIDE · CCT · CRI 90

Down	3000 K	4000 K
	2100 lm	2100 lm


Variant	Prod. no.	GBP
● black	1011851	268.00
○ white	1011850	268.00

Product	Prod. no.	GBP
Pendant suspension 1.5 m central		
● black	1011779	52.00
○ white	1011780	52.00
Pendant suspension 5 m central		
● black	1011781	92.00
○ white	1011782	92.00
Pendant suspension 3 m parallel		
● black	1011783	78.00
○ white	1011784	78.00

MEDO® 2.0 HYVE 40
CL, DALI

NEW





Dali · Touch · IP20 · 80° · 60 000 h L80B10 · UGR 16

200-240 V ~0/50/60 Hz | 400 mA
Total wattage: 17 W
Material: aluminium/steel

LED INSIDE · CCT · CRI 90

Down	3000 K	4000 K
	2100 lm	2100 lm


Variant	Prod. no.	GBP
● black	1011853	302.00
○ white	1011852	302.00

Product	Prod. no.	GBP
Pendant suspension 1.5 m central		
● black	1011779	52.00
○ white	1011780	52.00
Pendant suspension 5 m central		
● black	1011781	92.00
○ white	1011782	92.00
Pendant suspension 3 m parallel		
● black	1011783	78.00
○ white	1011784	78.00

MEDO® 2.0 HYVE 60
CL, PHASE

NEW





C · IP20 · 80° · 60 000 h L80B10 · UGR 13

220-240 V ~50/60 Hz | 900 mA
Total wattage: 35 W
Material: aluminium/steel


LED INSIDE · CCT · CRI 90

Down	3000 K	4000 K
	4800 lm	4800 lm

Variant	Prod. no.	GBP
● black	1011855	529.00
○ white	1011854	529.00

Product	Prod. no.	GBP
Pendant suspension 1.5 m central		
● black	1011779	52.00
○ white	1011780	52.00
Pendant suspension 5 m central		
● black	1011781	92.00
○ white	1011782	92.00
Pendant suspension 3 m parallel		
● black	1011783	78.00
○ white	1011784	78.00

MEDO® 2.0 HYVE 60
CL, DALI

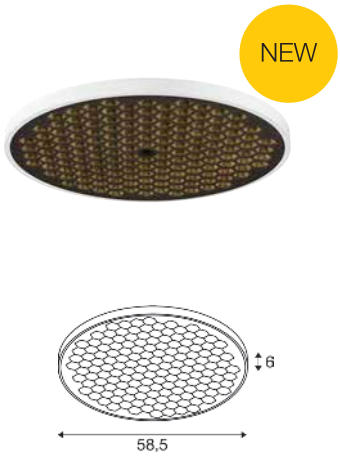

200-240 V ~0/50/60 Hz | 900 mA
Total wattage: 33 W
Material: aluminium/steel

Down	3000 K	4000 K
	4800 lm	4800 lm

Variant	Prod. no.	GBP
● black	1011857	562.00
○ white	1011856	562.00

Product	Prod. no.	GBP
Pendant suspension 1.5 m central		
● black	1011779	52.00
○ white	1011780	52.00
Pendant suspension 5 m central		
● black	1011781	92.00
○ white	1011782	92.00
Pendant suspension 3 m parallel		
● black	1011783	78.00
○ white	1011784	78.00

MEDO® 2.0 HYVE 80
CL, PHASE



220-240 V ~50/60 Hz | 1800 mA
Total wattage: 70 W
Material: aluminium/steel

Down	3000 K	4000 K
	9700 lm	9700 lm

Variant	Prod. no.	GBP
● black	1011859	789.00
○ white	1011858	789.00

Product	Prod. no.	GBP
Pendant suspension 1.5 m central		
● black	1011779	52.00
○ white	1011780	52.00
Pendant suspension 5 m central		
● black	1011781	92.00
○ white	1011782	92.00
Pendant suspension 3 m parallel		
● black	1011783	78.00
○ white	1011784	78.00

MEDO® 2.0 HYVE 80
CL, DALI



200-240 V ~0/50/60 Hz | 1800 mA
Total wattage: 67 W
Material: aluminium/steel

Down	3000 K	4000 K
	9700 lm	9700 lm

Variant	Prod. no.	GBP
● black	1011861	823.00
○ white	1011860	823.00

Product	Prod. no.	GBP
Pendant suspension 1.5 m central		
● black	1011779	52.00
○ white	1011780	52.00
Pendant suspension 5 m central		
● black	1011781	92.00
○ white	1011782	92.00
Pendant suspension 3 m parallel		
● black	1011783	78.00
○ white	1011784	78.00


1011699 199

MEDO® 2.0 SUSPENSION KIT
PENDANT SUSPENSION, 1.5 M CENTRAL

NEW



IP20 150 cm

Ø: 13 cm
H: 3 cm
Material: steel

Variant	Prod. no.	GBP
● black	1011779	52.00
○ white	1011780	52.00

MEDO® 2.0 SUSPENSION KIT
PENDANT SUSPENSION, 5 M CENTRAL

NEW



IP20 500 cm

Ø: 13 cm
H: 3 cm
Material: steel

Variant	Prod. no.	GBP
● black	1011781	92.00
○ white	1011782	92.00

MEDO® 2.0 SUSPENSION KIT
PENDANT SUSPENSION, 3 M PARALLEL

NEW



IP20 300 cm

Ø: 8 cm
H: 3 cm
Material: steel

Variant	Prod. no.	GBP
● black	1011783	78.00
○ white	1011784	78.00



MEDO® RING 60
PD, DALI







220-240 V ~50/60 Hz | 700 mA
Total wattage: 26 W
Material: aluminium/steel




	3000 K	4000 K
Down	3750 lm	4000 lm

Variant	Prod. no.	GBP
● black	**1008589**	**688.00**
○ white	**1008590**	**688.00**

MEDO® RING 60
PD, PHASE





C · IP20 · 110° · 50000 h L80B10 · 300 cm · UGR 25 · 30

220-240 V ~50/60 Hz | 700 mA
Total wattage: 27 W
Material: aluminium/steel


LED INSIDE · CCT · CRI 90

	3000 K	4000 K
Down	3750 lm	4000 lm

Variant	Prod. no.	GBP
● black	**1008591**	**663.00**
○ white	**1008592**	**663.00**

MEDO® RING 90
PD, DALI





Dali · Touch · IP20 · 110° · 50000 h L80B10 · 300 cm · UGR 25 · 22

220-240 V ~50/60 Hz | 1200 mA
Total wattage: 42 W
Material: aluminium/steel


LED INSIDE · CCT · CRI 90

	3000 K	4000 K
Down	5000 lm	5300 lm

Variant	Prod. no.	GBP
● black	**1008593**	**865.00**
○ white	**1008594**	**865.00**

MEDO® RING 90
PD, PHASE





C · IP20 · 110° · 50000 h L80B10 · 300 cm · UGR 25 · 30

220-240 V ~50/60 Hz | 1200 mA
Total wattage: 43 W
Material: aluminium/steel

LED INSIDE · CCT · CRI 90

	3000 K	4000 K
Down	5000 lm	5300 lm

Variant	Prod. no.	GBP
● black	**1008595**	**831.00**
○ white	**1008596**	**831.00**

MEDO® PRO 30
CW, DALI, UGR<19



Dali · Touch · IP50 · IK02 · 70° · 50 000 h L80B10 · UGR 19 · 20

220-240 V ~50/60 Hz | 250 mA
Total wattage: 10 W
Material: aluminium/steel

LED INSIDE · CCT · CRI 90

	3000 K	4000 K
Direct	1150 lm	1150 lm
Indirect	100 lm	100 lm

Variant	Prod. no.	GBP
● black	**1007284**	**285.00**
○ white	**1007285**	**285.00**

⊕

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	**135250**	**40.00**
○ white	**135251**	**40.00**
Suspension kit 5 m		
○ white	**1001950**	**88.00**
● black	**1001952**	**88.00**

MEDO® PRO 30
CW, PHASE, UGR<19



C · IP50 · IK02 · 70° · 50 000 h L80B10 · UGR 19 · 20

220-240 V ~50/60 Hz | 250 mA
Total wattage: 10 W
Material: aluminium/steel

LED INSIDE · CCT · CRI 90

	3000 K	4000 K
Direct	1150 lm	1150 lm
Indirect	100 lm	100 lm

Variant	Prod. no.	GBP
● black	**1007288**	**257.00**
○ white	**1007289**	**257.00**

⊕

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	**135250**	**40.00**
○ white	**135251**	**40.00**
Suspension kit 5 m		
○ white	**1001950**	**88.00**
● black	**1001952**	**88.00**

MEDO® PRO 40
CW, DALI, UGR<19



Dali · Touch · IP50 · IK02 · 80° · 50 000 h L80B10 · UGR 19 · 20

220-240 V ~50/60 Hz | 500 mA
Total wattage: 19 W
Material: aluminium/steel

LED INSIDE · CCT · CRI 90

	3000 K	4000 K
Direct	2200 lm	2300 lm
Indirect	200 lm	200 lm

Variant	Prod. no.	GBP
● black	**1007292**	**344.00**
○ white	**1007293**	**344.00**

⊕

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	**135250**	**40.00**
○ white	**135251**	**40.00**
Suspension kit 5 m		
○ white	**1001950**	**88.00**
● black	**1001952**	**88.00**

MEDO® PRO 40
CW, PHASE, UGR<19



220-240 V ~50/60 Hz | 500 mA
Total wattage: 19 W
Material: aluminium/steel

	3000 K	4000 K
Direct	2200 lm	2300 lm
Indirect	200 lm	200 lm

Variant	Prod. no.	GBP
● black	**1007296**	**300.00**
○ white	**1007297**	**300.00**

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	**135250**	**40.00**
○ white	**135251**	**40.00**
Suspension kit 5 m		
○ white	**1001950**	**88.00**
● black	**1001952**	**88.00**

MEDO® PRO 60
CW, DALI, UGR<19



220-240 V ~0/50/60 Hz | 1000 mA
Total wattage: 39 W
Material: aluminium/steel

	3000 K	4000 K
Direct	4600 lm	4700 lm
Indirect	400 lm	400 lm

Variant	Prod. no.	GBP
● black	**1007300**	**604.00**
○ white	**1007301**	**604.00**

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	**135250**	**40.00**
○ white	**135251**	**40.00**
Suspension kit 5 m		
○ white	**1001950**	**88.00**
● black	**1001952**	**88.00**

MEDO® PRO 60
CW, PHASE, UGR<19



220-240 V ~50/60 Hz | 1000 mA
Total wattage: 37 W
Material: aluminium/steel

	3000 K	4000 K
Direct	4600 lm	4700 lm
Indirect	400 lm	400 lm

Variant	Prod. no.	GBP
● black	**1007304**	**540.00**
○ white	**1007305**	**540.00**

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	**135250**	**40.00**
○ white	**135251**	**40.00**
Suspension kit 5 m		
○ white	**1001950**	**88.00**
● black	**1001952**	**88.00**

MEDO® PRO 90
CL, DALI, UGR<19



Dali Touch IP50 IK02 80° 50 000 h L80B10 UGR 19 20

220-240 V ~50/60 Hz | 1000 mA
Total wattage: 75 W
Material: aluminium/steel

LED INSIDE CCT CRI 90

	3000 K	4000 K
Direct	8800 lm	9100 lm
Indirect	600 lm	600 lm

Variant	Prod. no.	GBP
● black	**1007308**	**1,201.00**
○ white	**1007309**	**1,201.00**

⊕

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	**135250**	**40.00**
○ white	**135251**	**40.00**
Suspension kit 5 m		
○ white	**1001950**	**88.00**
● black	**1001952**	**88.00**

MEDO® PRO 90
CL, PHASE, UGR<19



C IP50 IK02 80° 50 000 h L80B10 UGR 19 20

220-240 V ~50/60 Hz | 1000 mA
Total wattage: 74 W
Material: aluminium/steel

LED INSIDE CCT CRI 90

	3000 K	4000 K
Direct	8800 lm	9100 lm
Indirect	600 lm	600 lm

Variant	Prod. no.	GBP
● black	**1007312**	**1,072.00**
○ white	**1007313**	**1,072.00**

⊕

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	**135250**	**40.00**
○ white	**135251**	**40.00**
Suspension kit 5 m		
○ white	**1001950**	**88.00**
● black	**1001952**	**88.00**

MEDO® PRO 30
CW, DALI



Dali Touch IP50 IK02 110° 50 000 h L80B10 UGR 25 20

220-240 V ~50/60 Hz | 250 mA
Total wattage: 10 W
Material: aluminium/steel

LED INSIDE CCT CRI 90

	3000 K	4000 K
Direct	1300 lm	1300 lm
Indirect	50 lm	50 lm

Variant	Prod. no.	GBP
● black	**1007286**	**277.00**
○ white	**1007287**	**277.00**

⊕

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	**135250**	**40.00**
○ white	**135251**	**40.00**
Suspension kit 5 m		
○ white	**1001950**	**88.00**
● black	**1001952**	**88.00**

MEDO® PRO 30
CW, PHASE



220-240 V ~50/60 Hz | 250 mA
Total wattage: 10 W
Material: aluminium/steel

Direct	3000 K	4000 K
	1300 lm	1300 lm
Indirect	3000 K	4000 K
	50 lm	50 lm

Variant	Prod. no.	GBP
● black	**1007290**	**249.00**
○ white	**1007291**	**249.00**

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	**135250**	**40.00**
○ white	**135251**	**40.00**
Suspension kit 5 m		
○ white	**1001950**	**88.00**
● black	**1001952**	**88.00**

MEDO® PRO 40
CW, DALI



220-240 V ~50/60 Hz | 500 mA
Total wattage: 19 W
Material: aluminium/steel

Direct	3000 K	4000 K
	2550 lm	2550 lm
Indirect	3000 K	4000 K
	100 lm	100 lm

Variant	Prod. no.	GBP
● black	**1007294**	**336.00**
○ white	**1007295**	**336.00**

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	**135250**	**40.00**
○ white	**135251**	**40.00**
Suspension kit 5 m		
○ white	**1001950**	**88.00**
● black	**1001952**	**88.00**

MEDO® PRO 40
CW, PHASE




220-240 V ~50/60 Hz | 500 mA
Total wattage: 19 W
Material: aluminium/steel

Direct	3000 K	4000 K
	2550 lm	2550 lm
Indirect	3000 K	4000 K
	100 lm	100 lm


Variant	Prod. no.	GBP
● black	**1007298**	**292.00**
○ white	**1007299**	**292.00**

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	**135250**	**40.00**
○ white	**135251**	**40.00**
Suspension kit 5 m		
○ white	**1001950**	**88.00**
● black	**1001952**	**88.00**

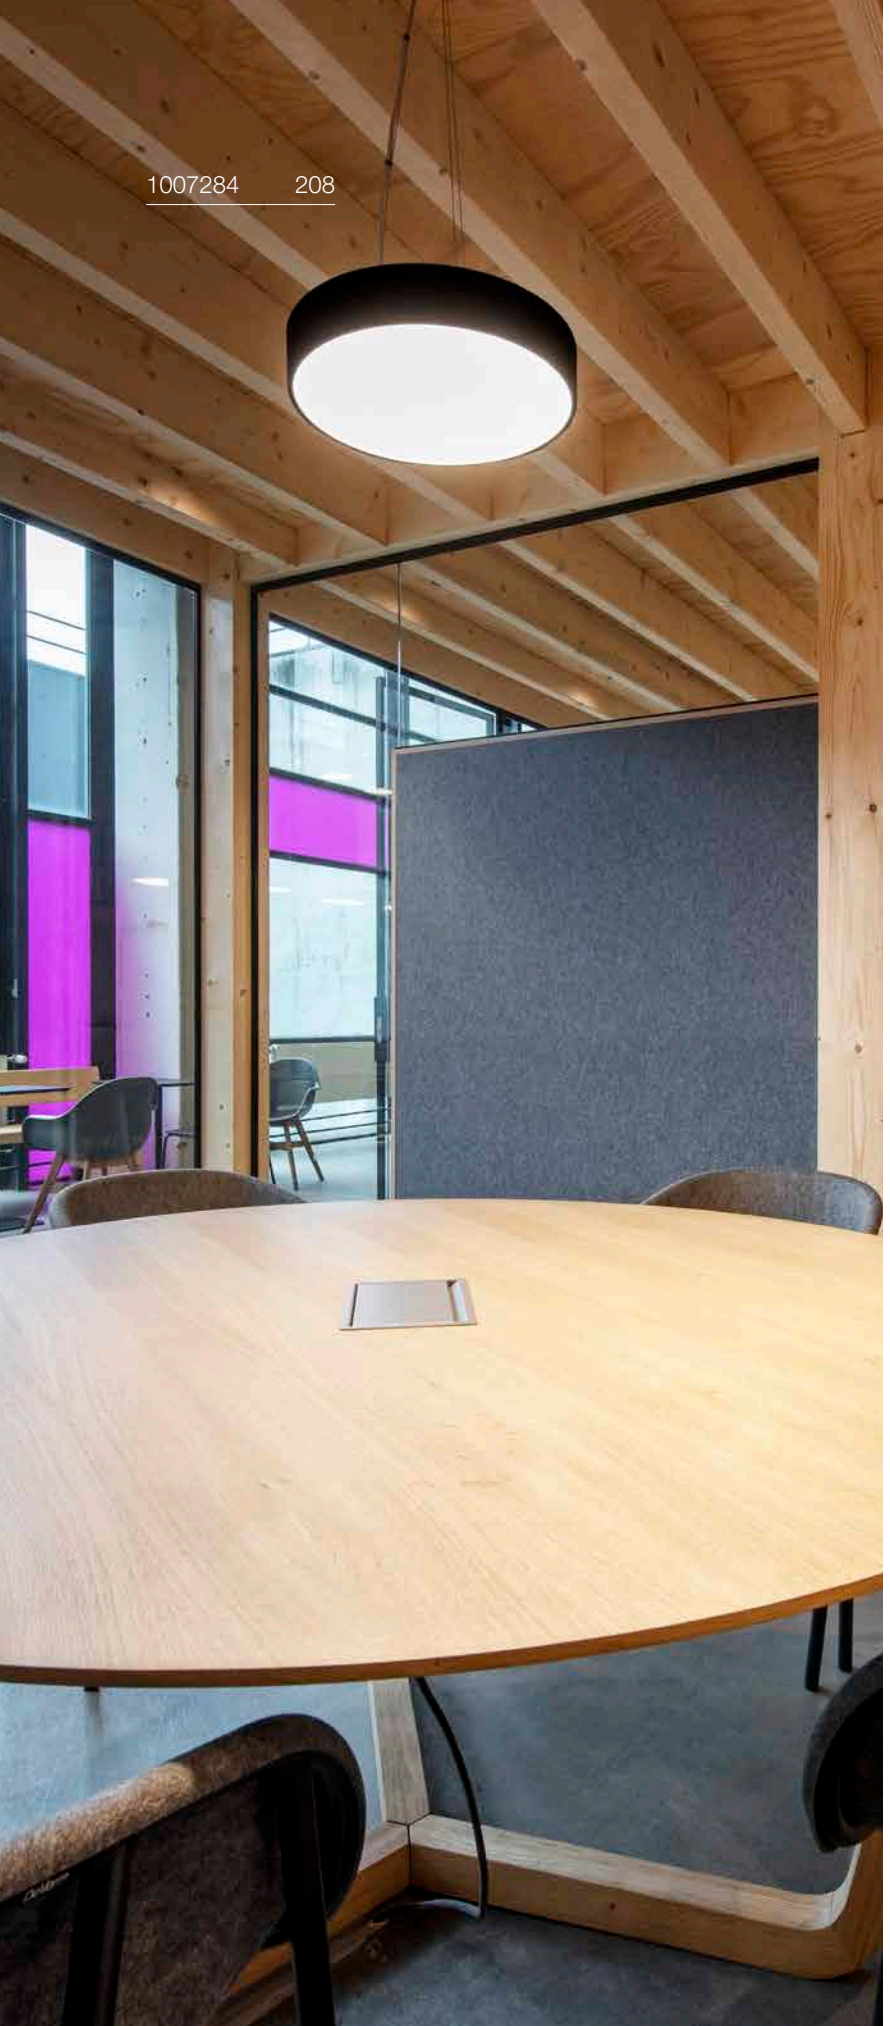

MEDO® PRO 60
CW, DALI







220-240 V ~0/50/60 Hz | 1000 mA
Total wattage: 39 W
Material: aluminium/steel



	3000 K	4000 K
Direct	5250 lm	5300 lm
Indirect	200 lm	200 lm

Variant	Prod. no.	GBP
● black	**1007302**	**588.00**
○ white	**1007303**	**588.00**

⊕

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	**135250**	**40.00**
○ white	**135251**	**40.00**
Suspension kit 5 m		
○ white	**1001950**	**88.00**
● black	**1001952**	**88.00**

MEDO® PRO 60
CW, PHASE



C · IP50 · IK02 · 110° · 50 000 h L80B10 · UGR 25 · 20

220-240 V ~50/60 Hz | 1000 mA
Total wattage: 37 W
Material: aluminium/steel

LED INSIDE · CCT · CRI 90

	3000 K	4000 K
Direct	5250 lm	5300 lm
Indirect	200 lm	200 lm

Variant	Prod. no.	GBP
● black	**1007306**	**524.00**
○ white	**1007307**	**524.00**

⊕

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	**135250**	**40.00**
○ white	**135251**	**40.00**
Suspension kit 5 m		
○ white	**1001950**	**88.00**
● black	**1001952**	**88.00**

MEDO® PRO 90
CL, DALI



Dali · Touch · IP50 · IK02 · 110° · 50 000 h L80B10 · UGR 25 · 20

220-240 V ~50/60 Hz | 1000 mA
Total wattage: 75 W
Material: aluminium/steel

LED INSIDE · CCT · CRI 90

	3000 K	4000 K
Direct	10550 lm	10750 lm
Indirect	450 lm	450 lm

Variant	Prod. no.	GBP
● black	**1007310**	**1,184.00**
○ white	**1007311**	**1,184.00**

⊕

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	**135250**	**40.00**
○ white	**135251**	**40.00**
Suspension kit 5 m		
○ white	**1001950**	**88.00**
● black	**1001952**	**88.00**

MEDO® PRO 90
CL, PHASE



C · IP50 · IK02 · 110° · 50 000 h L80B10 · UGR 25 · 20

220-240 V ~50/60 Hz | 1000 mA
Total wattage: 74 W
Material: aluminium/steel

LED INSIDE · CCT · CRI 90

	3000 K	4000 K
Direct	10550 lm	10750 lm
Indirect	450 lm	450 lm


Variant	Prod. no.	GBP
● black	**1007314**	**1,057.00**
○ white	**1007315**	**1,057.00**


⊕

Product	Prod. no.	GBP
Suspension kit 1.5 m		
● black	**135250**	**40.00**
○ white	**135251**	**40.00**
Suspension kit 5 m		
○ white	**1001950**	**88.00**
● black	**1001952**	**88.00**


MEDO®
OVERVIEW

NEW







NEW



	MEDO® SLIM 2.0 CW	**MEDO® PRO** CW	**MEDO® HYVE** CW
Sizes	**30 | 40 | 60 | 80**	**30 | 40 | 60 | 90**	**40 | 60 | 80**
UGR	19	19 | 25	13 | 16
Control	Phase **|** DALI 2	Phase **|** DALI 2	Phase **|** DALI 2
CCT Switch	3000K **|** 4000K	3000K **|** 4000K	3000K **|** 4000K
EasyBase	✓	✓	✓
Suspension kit	1.5 | 5 m (not included) 3 m parallel	1.5 | 5 m (not included)	1.5 | 5 m (not included) 3 m parallel

LED drivers are not included
and must be ordered separately






MEDO® MOUNTING FRAME	**MEDO® RING** PD
30 | 40 | 60 | 90	**60 | 90**
19	25
*	Phase **|** DALI 2
3000K **|** 4000K	3000K **|** 4000K
-	-
-	3 m (included)


*Requires driver

Easy and fast
to install thanks
to EasyBase


CEILING LIGHTS



Screw EasyBase
to the ceiling



Wire
EasyBase

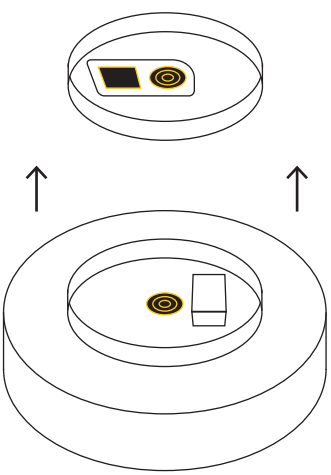


Select the colour temperature using
the CCT switch on the light, look for
the green markings

MEDO® 60 and MEDO® 90 are also
attached using the safety chain provided

LALU® SET
PD, E27 BASE





IP20 200 cm

220-240 V ~50/60 Hz
Material: aluminium/steel

- E27 lamp included

SOCKET INSIDE 4 W

Base: 1xE27

Variant	Prod. no.	GBP
● black	**1010785**	**142.00**

E27 | 4 W | 280°
830 lm | 2700 K | EEC = A

Prod. no. **1008641** **7.00 GBP**

LALU® SET
PD, E27 BASE





IP20 200 cm

220-240 V ~50/60 Hz
Material: aluminium/steel

- E27 lamp included

SOCKET INSIDE 7.5 W

Base: 1xE27

Variant	Prod. no.	GBP
● black	**1010786**	**176.00**


E27 | 8 W | 320°
700 lm | 2500 K | EEC = F

C,L

Prod. no. 1005265 23.00 GBP

LALU® SET
PD, E27 BASE





IP20 200 cm

220-240 V ~50/60 Hz
Material: aluminium/steel

- E27 lamp included

SOCKET INSIDE 7.5 W

Base: 1xE27

Variant	Prod. no.	GBP
● black	**1010787**	**205.00**


E27 | 8 W | 320°
700 lm | 2500 K | EEC = F

C,L

Prod. no. 1005265 23.00 GBP

LALU® SET
PD, E27 BASE





IP20 200 cm

220-240 V ~50/60 Hz
Material: aluminium/steel

- E27 lamp included

SOCKET INSIDE 7.5 W

Base: 1xE27


Variant	Prod. no.	GBP
● black	**1010788**	**176.00**

E27 | 8 W | 320°
700 lm | 2500 K | EEC = F

C,L


Prod. no. 1005265 23.00 GBP

Discover more LALU colours and shapes® at ks-light.co.uk

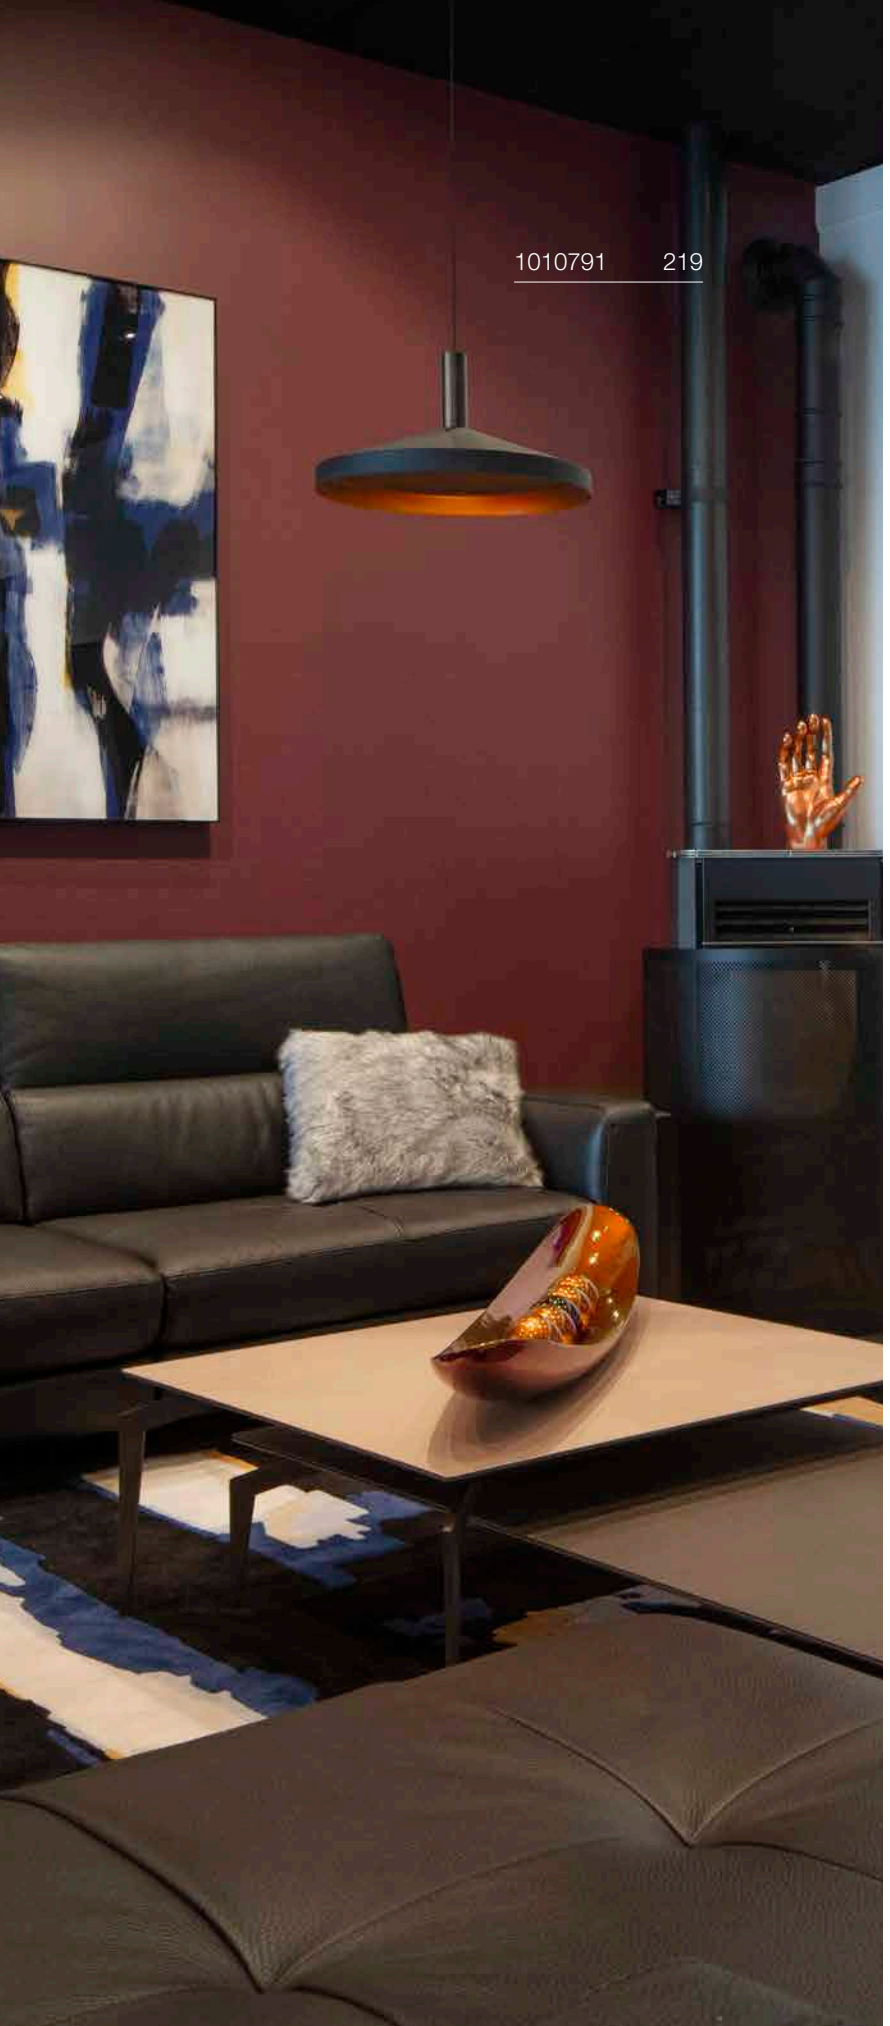

LALU® SET
PD, LED BASE, PHASE







220-240 V ~50/60 Hz | 500 mA
Total wattage: 9.5 W
Material: aluminium/steel

- Including colour temperature switch 2700 K/3000 K



	2700 K	3000 K
Down	550 lm	600 lm

Variant	Prod. no.	GBP
● black	**1010789**	**231.00**

LALU® SET
PD, LED BASE, PHASE





IP20 IK03 40° 50000 h L80B20 200 cm

220-240 V ~50/60 Hz | 500 mA
Total wattage: 9.5 W
Material: aluminium/steel

- Including colour temperature switch 2700 K/3000 K


LED INSIDE CCT CRI 90

	2700 K	3000 K
Down	650 lm	700 lm

Variant	Prod. no.	GBP
● black	1010790	235.00

LALU® SET
PD, LED BASE, PHASE





IP20 IK03 40° 50000 h L80B20 200 cm

220-240 V ~50/60 Hz | 500 mA
Total wattage: 9.5 W
Material: aluminium/steel

- Including colour temperature switch 2700 K/3000 K


LED INSIDE CCT CRI 90

	2700 K	3000 K
Down	700 lm	800 lm

Variant	Prod. no.	GBP
● black	1010791	256.00

LALU® SET
PD, LED BASE, PHASE





IP20 IK03 40° 50000 h L80B20 200 cm

220-240 V ~50/60 Hz | 500 mA
Total wattage: 9.5 W
Material: aluminium/steel

- Including colour temperature switch 2700 K/3000 K

LED INSIDE CCT CRI 90


	2700 K	3000 K
Down	700 lm	700 lm

Variant	Prod. no.	GBP
● black	1010792	205.00

Discover more LALU colours and shapes® at ks-light.co.uk

LALU® SET
PD, LED BASE, PHASE, RECESSED







220-240 V ~50/60 Hz | 500 mA
Total wattage: 9.5 W
Material: aluminium/steel

- Including colour temperature switch 2700 K/3000 K




	2700 K	3000 K
Down	550 lm	600 lm

Variant	Prod. no.	GBP
● black	**1010793**	**222.00**

LALU® SET
PD, LED BASE, PHASE, RECESSED







220-240 V ~50/60 Hz | 500 mA
Total wattage: 9.5 W
Material: aluminium/steel

- Including colour temperature switch 2700 K/3000 K




	2700 K	3000 K
Down	650 lm	700 lm

Variant	Prod. no.	GBP
● black	**1010794**	**226.00**

LALU® SET
PD, LED BASE, PHASE, RECESSED







220-240 V ~50/60 Hz | 500 mA
Total wattage: 9.5 W
Material: aluminium/steel

- Including colour temperature switch 2700 K/3000 K




	2700 K	3000 K
Down	700 lm	800 lm

Variant	Prod. no.	GBP
● black	**1010795**	**247.00**

LALU® SET
PD, LED BASE, PHASE, RECESSED





IP20 IK03 40° 50000 h L80B20 200 cm

220-240 V ~50/60 Hz | 500 mA
Total wattage: 9.5 W
Material: aluminium/steel

- Including colour temperature switch 2700 K/3000 K


LED INSIDE CCT CRI 90


	2700 K	3000 K
Down	700 lm	700 lm

Variant	Prod. no.	GBP
● black	**1010796**	**197.00**

DYSKO
PD, PHASE

GERMAN DESIGN AWARD WINNER 2026





IP20 IK02 36° 50000 h L80B10 200 cm

220-240 V ~50/60 Hz | 100 mA
Total wattage: 4.4 W
Material: aluminium

- Including external LED driver

LED INSIDE CRI 90


2700 K
500 lm

Variant	Prod. no.	GBP
black/white	**1010360**	**127.00**
gold/black/white	**1010359**	**127.00**
gold/black/gold	**1010361**	**130.00**


1007703 223

ONE FLAT
PD, DALI, TRIPLE







220-240 V ~50/60 Hz | 1700 mA
Total wattage: 58 W
Material: aluminium/steel




2700 K	3000 K
3500 lm	3700 lm

Variant	Prod. no.	GBP
● black	**1007701**	**991.00**
○ white	**1007702**	**991.00**
● brass	**1007703**	**991.00**

ONE FLAT
PD, PHASE, SINGLE








220-240 V ~50/60 Hz | 600 mA
Total wattage: 23 W
Material: aluminium/steel



	2700 K	3000 K
1007856	1900 lm	2050 lm
1007855	1300 lm	1350 lm
1007857	1700 lm	1750 lm


Variant	Prod. no.	GBP
● black	**1007855**	**417.00**
○ white	**1007856**	**417.00**
● brass	**1007857**	**417.00**

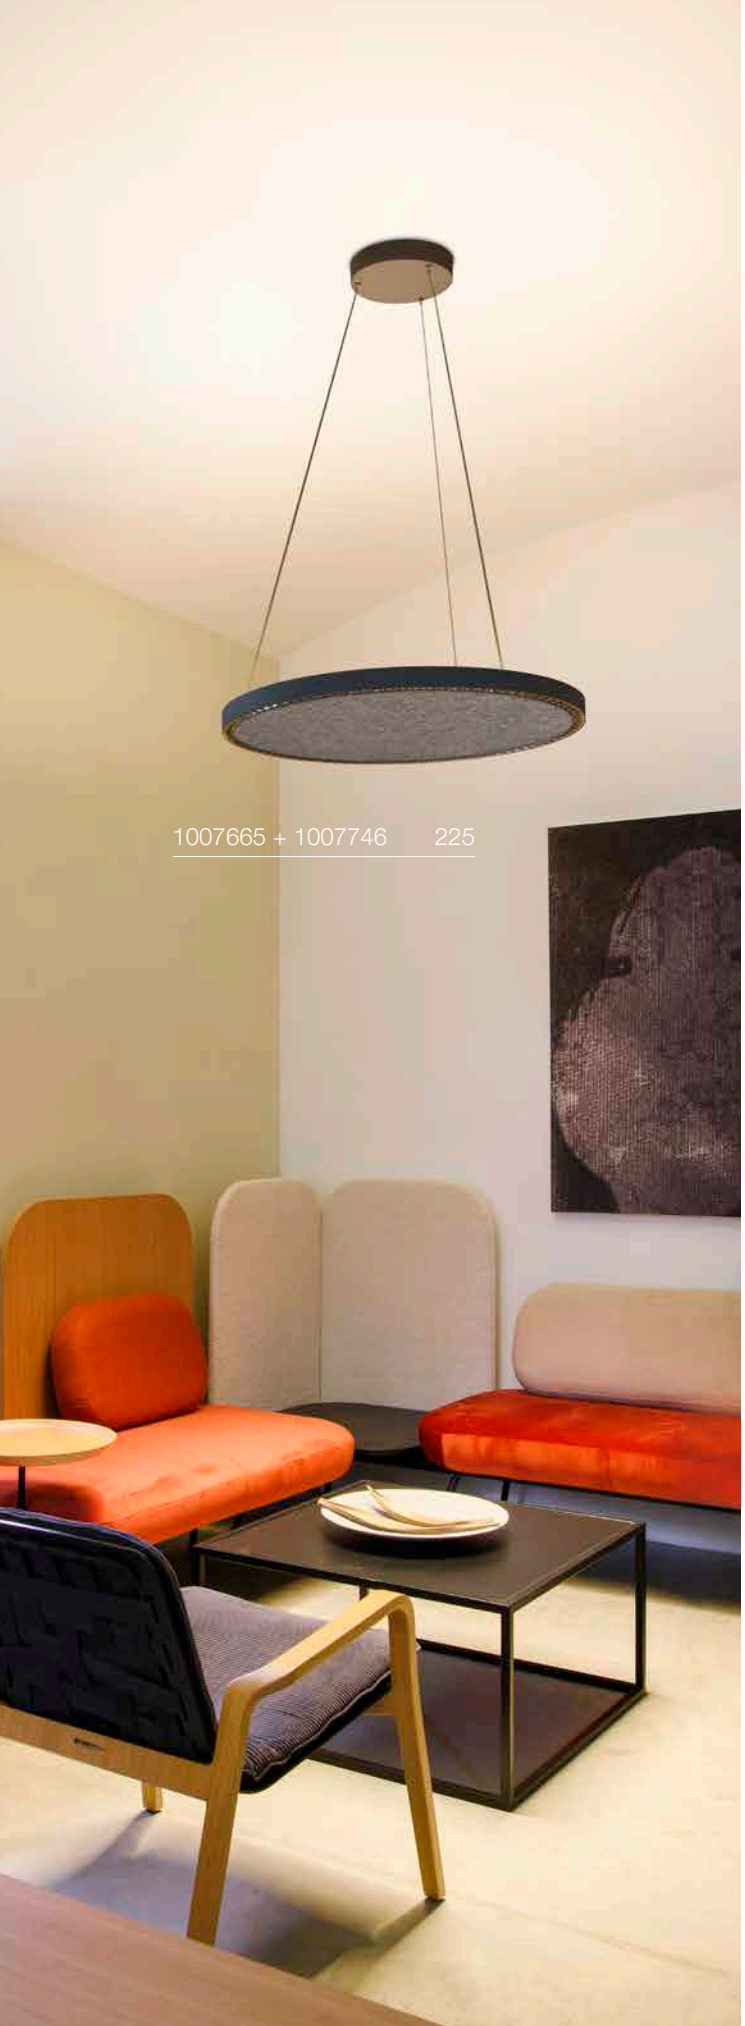

1007665 + 1007746 225

ONE VERTICAL
PD, PHASE







220-240 V ~50/60 Hz | 1050 mA
Total wattage: 40 W
Material: aluminium/steel




2700 K	3000 K
2400 lm	2550 lm

Variant	Prod. no.	GBP
● black	**1008002**	**416.00**
○ white	**1008003**	**416.00**
● brass	**1008004**	**416.00**

ONE CUBE
PD, DALI





Dali · Touch · IP20 · 44° · 50000 h L80B10 · 300 cm · UGR 19


220-240 V ~50/60 Hz | 1400 mA
Total wattage: 54 W
Material: aluminium/steel


LED INSIDE · CRI 90

1007661 **1007662**	3000 K 4000 lm	
1007663 **1007664**	4000 K 4300 lm	

Variant	Prod. no.	GBP
● black 3000 K	**1007661**	**540.00**
● black 4000 K	**1007663**	**539.00**
○ white 3000 K	**1007662**	**540.00**
○ white 4000 K	**1007664**	**539.00**

ONE CUBE UP/DOWN
PD, DALI, UP/DOWN





Dali · Touch · IP20 · 130° · 44° · 50000 h L80B10 · 300 cm · UGR 19

220-240 V ~50/60 Hz | 2100 mA
Total wattage: 80 W
Material: aluminium/steel

LED INSIDE

1007665 **1007666**	Down Up	3000 K 4000 lm 3000 K 2000 lm
1007671 **1007672**	Down Up	4000 K 4300 lm 4000 K 2200 lm

Variant	Prod. no.	GBP
● black 3000 K	**1007665**	**604.00**
● black 4000 K	**1007671**	**604.00**
○ white 3000 K	**1007666**	**604.00**
○ white 4000 K	**1007672**	**604.00**

ONE
FELT PLATE, ACOUSTIC FELT, FOR ONE 80/ONE CUBE



Ø: 75.5 cm
H: 3.8 cm


- Fits all One light rings with Ø 80 cm


Variant	Prod. no.	GBP
grey	**1007746**	**96.00**
beige	**1007891**	**96.00**


1005177 227

ONE 60
PD, DALI







220-240 V ~50/60 Hz | 600 mA
Total wattage: 24 W
Material: aluminium/steel




3000 K	4000 K
1480 lm	1550 lm

Variant	Prod. no.	GBP
● black	**1002909**	**361.00**
○ white	**1002910**	**361.00**

ONE 60
PD, DALI, UP/DOWN







220-240 V ~50/60 Hz | 600 mA
Total wattage: 25 W
Material: aluminium/steel




	3000 K	4000 K
Up	400 lm	410 lm
Down	400 lm	410 lm

Variant	Prod. no.	GBP
● black	**1004761**	**459.00**
○ white	**1004762**	**459.00**

ONE 60
PD, PHASE, UP/DOWN







220-240 V ~50/60 Hz | 600 mA
Total wattage: 24 W
Material: aluminium/steel




		2700 K	3000 K
1005177	Up	750 lm	800 lm
	Down	750 lm	800 lm
1004760	Up	800 lm	850 lm
	Down	800 lm	850 lm
1004759	Up	575 lm	600 lm
	Down	575 lm	600 lm

Variant	Prod. no.	GBP
● black	**1004759**	**416.00**
○ white	**1004760**	**416.00**
● brass	**1005177**	**433.00**


1004763 229

ONE 80
PD, DALI







220-240 V ~50/60 Hz | 800 mA
Total wattage: 32 W
Material: aluminium/steel




3000 K	4000 K
1930 lm	2140 lm

Variant	Prod. no.	GBP
● black	**1002911**	**403.00**
○ white	**1002912**	**403.00**

ONE 80
PD, DALI, UP/DOWN







220-240 V ~50/60 Hz | 800 mA
Total wattage: 34 W
Material: aluminium/steel



	3000 K	4000 K
Up	615 lm	635 lm
Down	615 lm	635 lm

Variant	Prod. no.	GBP
● black	**1004763**	**554.00**
○ white	**1004764**	**554.00**

ONE
FELT PLATE, ACOUSTIC FELT, FOR ONE 80/ONE CUBE



Ø: 75.5 cm
H: 3.8 cm

- Fits all One light rings with Ø 80 cm


Variant	Prod. no.	GBP
● grey	**1007746**	**96.00**
● beige	**1007891**	**96.00**


1005178 231

ONE DOUBLE
PD, DALI, UP/DOWN

GERMAN DESIGN AWARD SPECIAL 2022





Dali · 130° · 50000 h L80B10 · 300 cm

220-240 V ~50/60 Hz | 1400 mA
Total wattage: 55 W
Material: aluminium/steel

INSIDE · CCT · CRI 90


	3000 K	4000 K
Up	1050 lm	1060 lm
Down	3000 K	4000 K
	1050 lm	1060 lm

Variant	Prod. no.	GBP
● black	**1004767**	**940.00**
○ white	**1004768**	**940.00**

ONE DOUBLE
PD, PHASE, UP/DOWN

GERMAN DESIGN AWARD SPECIAL 2022





C · 130° · 180 cm

220-240 V ~50/60 Hz | 900 mA
Total wattage: 35 W
Material: aluminium/steel


INSIDE · CCT · CRI 90

	2700 K	3000 K
Up	615 lm	635 lm
Down	2700 K	3000 K
	615 lm	635 lm

Variant	Prod. no.	GBP
● black	**1004765**	**697.00**
○ white	**1004766**	**697.00**
● brass	**1005178**	**728.00**

ONE TRIPLE
PD, DALI





Dali · IP20 · 30000 h L70B50 · 300 cm

220-240 V ~50/60 Hz | 1700 mA
Total wattage: 64 W
Material: aluminium/steel

INSIDE · CCT · CRI 90

	3000 K	4000 K
	4040 lm	4200 lm

Variant	Prod. no.	GBP
● black	**1002913**	**966.00**
○ white	**1002914**	**966.00**



1006188 233



ONE LINEAR 100
PD, PHASE, UP/DOWN

GERMAN DESIGN AWARD SPECIAL 2022





180 cm 20

220-240 V ~50/60 Hz | 600 mA
Total wattage: 24 W
Material: aluminium/steel

LED INSIDE CCT CRI 90


	2700 K	3000 K
Up	550 lm	580 lm
Down	700 lm	670 lm

Variant	Prod. no.	GBP
● black	**1006185**	**268.00**

ONE LINEAR 140
PD, PHASE, UP/DOWN

GERMAN DESIGN AWARD SPECIAL 2022






180 cm 20

220-240 V ~50/60 Hz | 900 mA
Total wattage: 35 W
Material: aluminium/steel

LED INSIDE CCT CRI 90


	2700 K	3000 K
Up	830 lm	860 lm
Down	980 lm	1015 lm


Variant	Prod. no.	GBP
● black	**1006188**	**316.00**
○ white	**1006189**	**316.00**
● brass	**1006190**	**333.00**

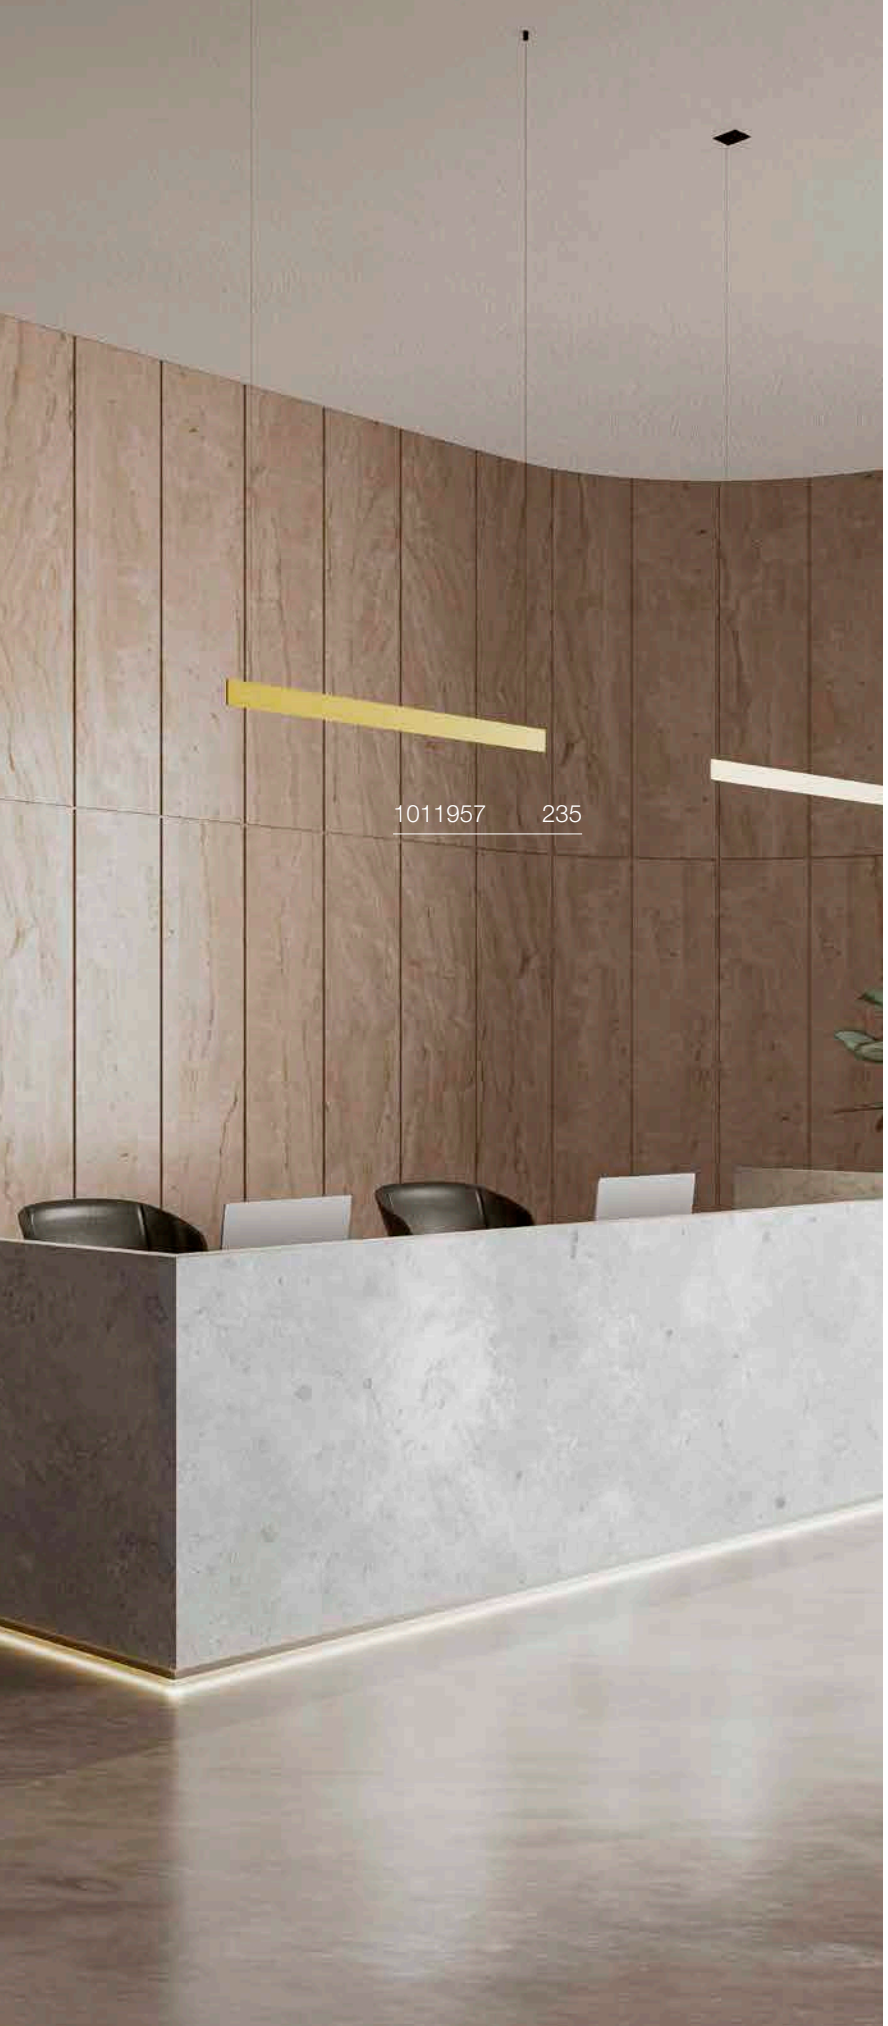

LINIUS 120
PD, PHASE, CANOPY

NEW








220-240 V ~50/60 Hz | 900 mA
Total wattage: 34 W
Material: aluminium/steel

LED INSIDE CRI 90

1011934 **1011935**	Up	2700 K 1350 lm
	Down	2700 K 1650 lm
1011936 **1011937**	Up	3000 K 1400 lm
	Down	3000 K 1700 lm

Variant	Prod. no.	GBP
black 2700 K	**1011934**	**520.00**
black 3000 K	**1011936**	**520.00**
brass 2700 K	**1011935**	**546.00**
brass 3000 K	**1011937**	**546.00**

LINIUS 120
PD, PHASE, RECESSED

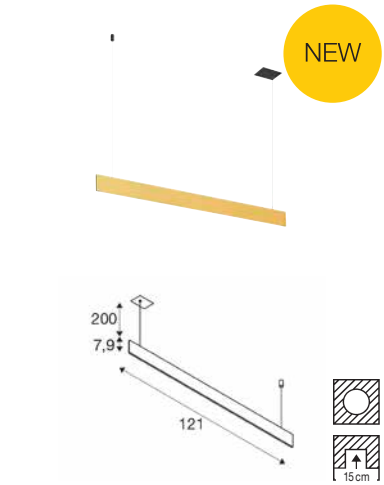

C · IP20 · IK02 · 90° · 50000 h L80B20 · 200 cm · 64


220-240 V ~50/60 Hz | 900 mA
Total wattage: 34 W
Material: aluminium/steel

LED INSIDE · CRI 90

1011938	Up	2700 K / 1350 lm
1011939	Down	2700 K / 1650 lm
1011940	Up	3000 K / 1400 lm
1011941	Down	3000 K / 1700 lm

Variant	Prod. no.	GBP
black 2700 K	1011938	487.00
black 3000 K	1011940	487.00
brass 2700 K	1011939	512.00
brass 3000 K	1011941	512.00

LINIUS 120
PD, DALI, CANOPY

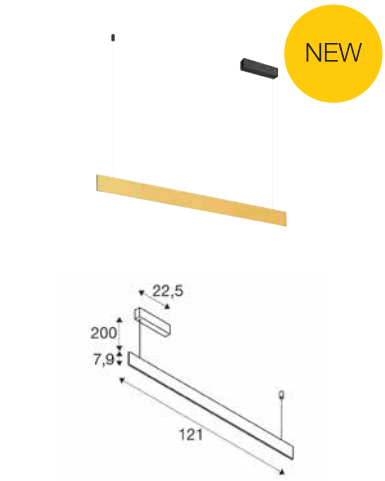

Dali · IP20 · IK02 · 90° · 50000 h L80B20 · 200 cm · 15


220-240 V ~0/50/60 Hz | 900 mA
Total wattage: 34 W
Material: aluminium/steel

LED INSIDE · CRI 90

1011950	Up	2700 K / 1350 lm
1011951	Down	2700 K / 1650 lm
1011952	Up	3000 K / 1400 lm
1011953	Down	3000 K / 1700 lm

Variant	Prod. no.	GBP
black 2700 K	1011950	546.00
black 3000 K	1011952	546.00
brass 2700 K	1011951	571.00
brass 3000 K	1011953	571.00

LINIUS 120
PD, DALI, RECESSED

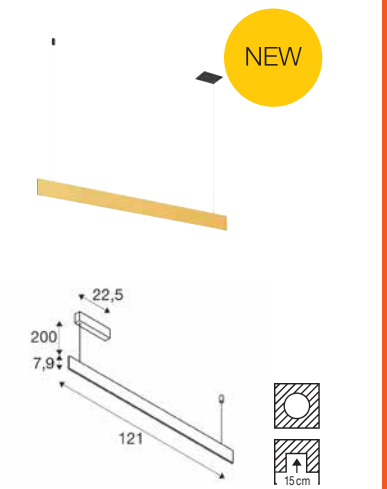


Dali · IP20 · IK02 · 90° · 50000 h L80B20 · 200 cm · 15

220-240 V ~0/50/60 Hz | 900 mA
Total wattage: 34 W
Material: aluminium/steel

LED INSIDE · CRI 90


1011954	Up	2700 K / 1350 lm
1011955	Down	2700 K / 1650 lm
1011956	Up	3000 K / 1400 lm
1011957	Down	3000 K / 1700 lm


Variant	Prod. no.	GBP
black 2700 K	1011954	520.00
black 3000 K	1011956	520.00
brass 2700 K	1011955	546.00
brass 3000 K	1011957	546.00

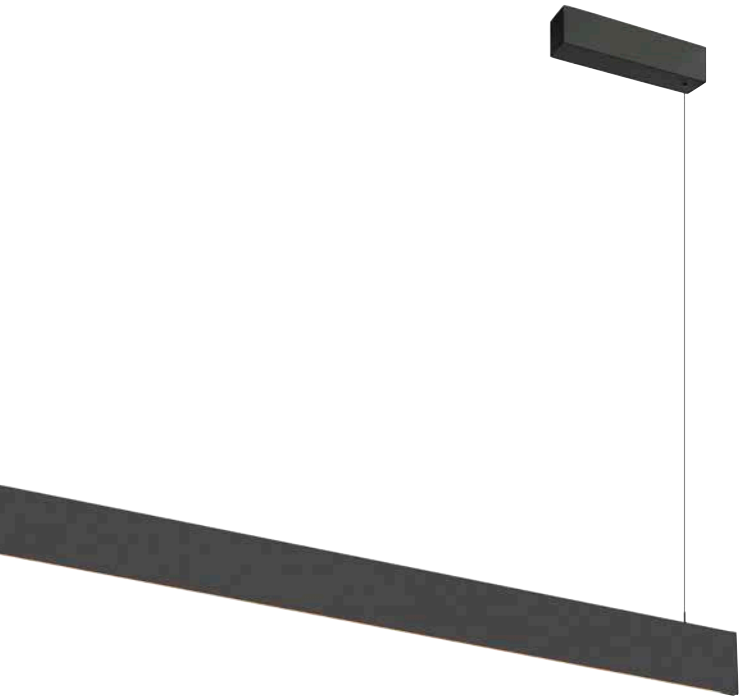

LINIUS 150
PD, PHASE, CANOPY

NEW








220-240 V ~50/60 Hz | 1050 mA
Total wattage: 40 W
Material: aluminium/steel


LED INSIDE CRI 90

1011938 **1011939**	Up	2700 K 1550 lm
	Down	2700 K 1800 lm
1011940 **1011941**	Up	3000 K 1600 lm
	Down	3000 K 1850 lm

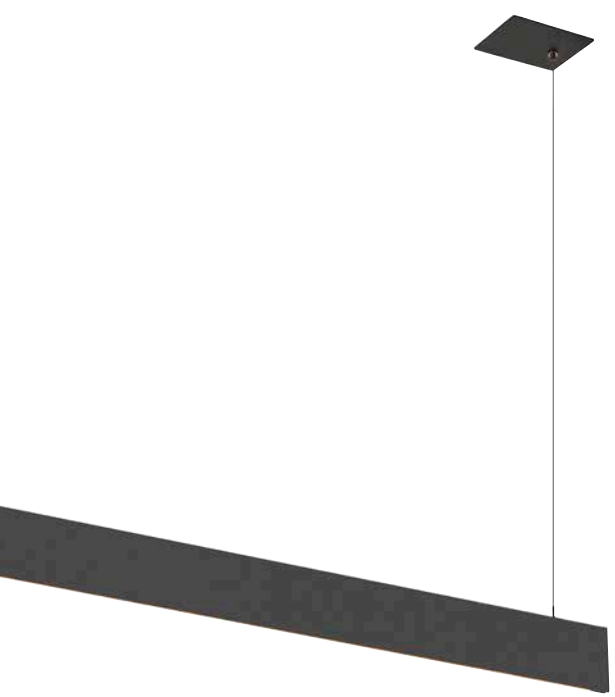

Variant	Prod. no.	GBP
● black 2700 K	**1011942**	**604.00**
● black 3000 K	**1011944**	**604.00**
● brass 2700 K	**1011943**	**646.00**
● brass 3000 K	**1011945**	**646.00**

LINIUS 150
PD, PHASE, RECESSED

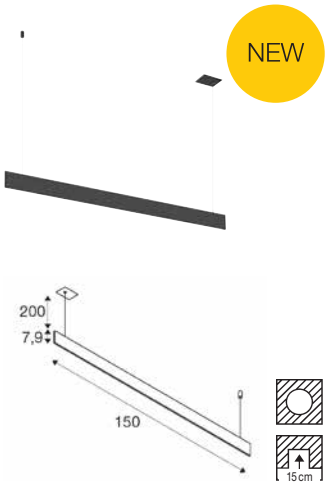

C · IP20 · IK02 · 90° · 50000 h L80B20 · 200 cm · 64


220-240 V ~50/60 Hz | 1050 mA
Total wattage: 40 W
Material: aluminium/steel

LED INSIDE · CRI 90

1011946 **1011947**	Up	2700 K 1550 lm
	Down	2700 K 1800 lm
1011948 **1011949**	Up	3000 K 1600 lm
	Down	3000 K 1850 lm

Variant	Prod. no.	GBP
● black 2700 K	**1011946**	**588.00**
● black 3000 K	**1011948**	**588.00**
● brass 2700 K	**1011947**	**604.00**
● brass 3000 K	**1011949**	**604.00**

LINIUS 150
PD, DALI, CANOPY

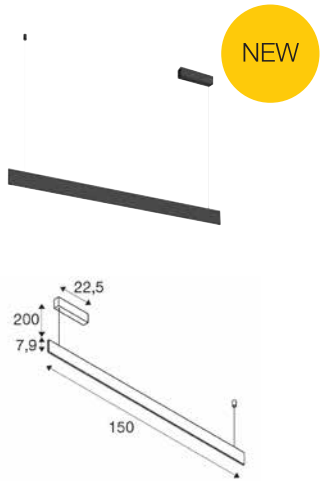

Dali · IP20 · IK02 · 90° · 50000 h L80B20 · 200 cm · 15


220-240 V ~0/50/60 Hz | 1050 mA
Total wattage: 40 W
Material: aluminium/steel

LED INSIDE · CRI 90

1011958 **1011959**	Up	2700 K 1550 lm
	Down	2700 K 1800 lm
1011960 **1011961**	Up	3000 K 1600 lm
	Down	3000 K 1850 lm

Variant	Prod. no.	GBP
● black 2700 K	**1011958**	**630.00**
● black 3000 K	**1011960**	**630.00**
● brass 2700 K	**1011959**	**655.00**
● brass 3000 K	**1011961**	**655.00**

LINIUS 150
PD, DALI, RECESSED

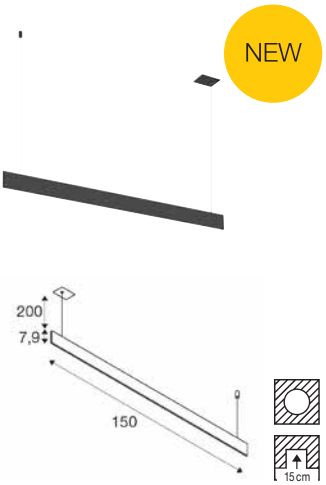

Dali · IP20 · IK02 · 90° · 50000 h L80B20 · 200 cm · 15

220-240 V ~0/50/60 Hz | 1050 mA
Total wattage: 40 W
Material: aluminium/steel

LED INSIDE · CRI 90


1011962 **1011963**	Up	2700 K 1550 lm
	Down	2700 K 1800 lm
1011964 **1011965**	Up	3000 K 1600 lm
	Down	3000 K 1850 lm

Variant	Prod. no.	GBP
● black 2700 K	**1011962**	**604.00**
● black 3000 K	**1011964**	**604.00**
● brass 2700 K	**1011963**	**630.00**
● brass 3000 K	**1011965**	**630.00**


1007588 239

PANTILO ROPE 19
PD, E27





IP20 250 cm 250 cm

220-240 V ~50/60 Hz
Material: glass

- open cable end
- Matching accessories can be found on page 259

SOCKET INSIDE 15 W

Base: 1xE27 | max. Ø: 10 cm | L: 11 cm

Variant	Prod. no.	GBP
gold	1007597	172.00
silver	1007596	172.00

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F

Prod. no. 1005303 9.00 GBP


SMART

E27 | 9 W | 180°
806 lm | 2700 K | EEC = F

Prod. no. 1012471 14.00 GBP

PANTILO ROPE 20
PD, E27





IP20 250 cm

220-240 V ~50/60 Hz
Material: glass

SOCKET INSIDE 15 W

Base: 1xE27 | max. Ø: 10 cm | L: 18 cm

Variant	Prod. no.	GBP
gold	1007589	205.00
silver	1007588	205.00

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F

Prod. no. 1005303 9.00 GBP

SMART

E27 | 9 W | 180°
806 lm | 2700 K | EEC = F

Prod. no. 1012471 14.00 GBP

PANTILO ROPE 27
PD, E27





IP20 250 cm

220-240 V ~50/60 Hz
Material: glass

SOCKET INSIDE 15 W

Base: 1xE27 | max. Ø: 15 cm | L: 11 cm

Variant	Prod. no.	GBP
gold	1007599	222.00
silver	1007598	222.00

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F

Prod. no. 1005303 9.00 GBP

SMART

E27 | 9 W | 180°
806 lm | 2700 K | EEC = F

Prod. no. 1012471 14.00 GBP

PANTILO OVAL
PD, E27



IP20 250

220-240 V ~50/60 Hz
Material: glass

- open cable end
- Matching accessories can be found on page 259

SOCKET INSIDE 15 W

Base: 1xE27

Variant	Prod. no.	GBP
white	1006402	134.00
gold	1006403	151.00
chrome	1006398	151.00
copper	1006400	151.00

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F

Prod. no. 1005303 9.00 GBP

SMART

E27 | 9 W | 180°
806 lm | 2700 K | EEC = F

Prod. no. 1012471 14.00 GBP

PANTILO 20
PD, E27



IP20 250

220-240 V ~50/60 Hz
Material: glass

- open cable end
- Matching accessories can be found on page 259

SOCKET INSIDE 15 W

Base: 1xE27

Variant	Prod. no.	GBP
white	1006396	134.00
gold	1006395	151.00
chrome	1003004	151.00
copper	1003005	151.00

E27 | 8 W | 320°
700 lm | 2500 K | EEC = F

Prod. no. 1005265 23.00 GBP

SMART

E27 | 9 W | 180°
806 lm | 2700 K | EEC = F

Prod. no. 1012471 14.00 GBP

PANTILO 28
PD, E27



IP20 250

220-240 V ~50/60 Hz
Material: glass

- open cable end
- Matching accessories can be found on page 259

SOCKET INSIDE 15 W

Base: 1xE27

Variant	Prod. no.	GBP
white	1006399	163.00
gold	1006397	184.00
chrome	1003006	184.00
copper	1003007	184.00

E27 | 8 W | 320°
700 lm | 2500 K | EEC = F

Prod. no. 1005265 23.00 GBP


SMART

E27 | 9 W | 180°
806 lm | 2700 K | EEC = F

Prod. no. 1012471 14.00 GBP

PANTILO CONVEX 29
PD, E27





IP20 250

220-240 V ~50/60 Hz
Material: glass

- open cable end
- Matching accessories can be found on page 259

SOCKET INSIDE 40 W

Base: E27 | max. Ø: 10 cm | L: 20 cm


Variant	Prod. no.	GBP
white	1007881	197.00
gold	1007880	214.00
chrome	1003443	214.00
copper	1007879	214.00

E27 | 6 W | 330°
570 lm | 2200 K | EEC = F

Prod. no. 1008152 55.00 GBP

PANTILO CONVEX 40
PD, E27





IP20 150 cm

220-240 V ~50/60 Hz
Material: glass

SOCKET INSIDE 40 W

Base: E27 | max. Ø: 15 cm | L: 30 cm

Variant	Prod. no.	GBP
white	1007878	294.00
gold	1007877	315.00
chrome	1003444	306.00
copper	1007876	315.00

E27 | 6 W | 330°
570 lm | 2200 K | EEC = F


Prod. no. 1008152 55.00 GBP



1008178 + 1008192 243

LIGHT EYE® 90
PD, QPAR51





IP20 150 cm

220-240 V ~50/60 Hz
Material: steel

SOCKET INSIDE 6 W

Base: 1xGU10 max. Ø: 5.1 cm | L: 5.35 cm

Variant	Prod. no.	GBP
● black	1008172	73.00
○ white	1008173	73.00

GU10 | 6 W | 38°
470 lm | 3000 K | EEC = F

C,L

Prod. no. 1005079 7.00 GBP


SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no. 1012469 23.00 GBP

LIGHT EYE® 150
PD, QPAR111





IP20 150 cm

220-240 V ~50/60 Hz
Material: steel

SOCKET INSIDE 13 W

Base: 1xGU10 max. Ø: 11.1 cm | L: 7 cm

Variant	Prod. no.	GBP
● black	1008178	113.00
○ white	1008179	113.00

GU10 | 12 W | 55°
680 lm | 3000 K | EEC = G

C,L

Prod. no. 1005298 73.00 GBP

LIGHT EYE® 90
DECORATIVE RING Ø 5.7 CM



Ø: 5.9 cm
H: 1.4 cm
Material: steel

Variant	Prod. no.	GBP
● black	1008186	8.00
○ white	1008187	8.00
● gold	1008188	13.00
◑ chrome	151049	13.00

LIGHT EYE® 150
DECORATIVE RING Ø 13.6 CM



Ø: 13.6 cm
H: 2.3 cm
Material: steel

Variant	Prod. no.	GBP
● black	1008189	31.00
○ white	1008190	31.00
● gold	1008192	39.00
◑ chrome	1008191	39.00




ENOLA® 2.0 S

PD, SINGLE, GU10 MINI, PAR11

NEW







IP20 IK02 200 cm

220-240 V ~50/60 Hz
Material: aluminium/steel/plastic PC

SOCKET INSIDE 5 W

Base: 1xGU10 | max. Ø: 3.6 cm | L: 4.6 cm

Variant	Prod. no.	GBP
● black	**1011929**	**52.00**
○ white	**1011930**	**52.00**

GU10 | 5 W | 36°
390 lm | 2700 K | EEC = F


C,L

Prod. no. 1011670 10.00 GBP

Product	Prod. no.	GBP
Fitu | Single ceiling rosette		
○ white	**1004745**	**31.00**
ENOLA® 2.0 S, decorative ring		
● black	**1011753**	**4.00**
○ white	**1011754**	**4.00**
gold	**1011755**	**4.00**
copper	**1011756**	**4.00**

ENOLA® 2.0 M
PD, SINGLE, GU10, QPAR51

NEW

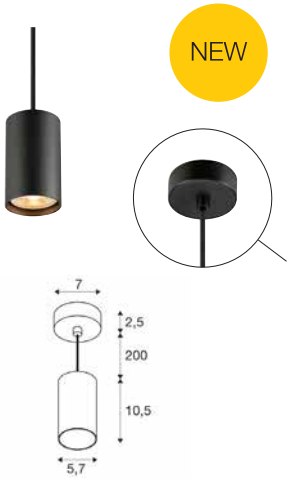

IP20 IK02 200 cm

220-240 V ~50/60 Hz
Material: aluminium/steel/plastic PC

SOCKET INSIDE 10 W

Base: 1xGU10 max. Ø: 5.1 cm | L: 6 cm

Variant	Prod. no.	GBP
● black	1011909	60.00
○ white	1011910	60.00

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

C,L

Prod. no. 1005077 7.00 GBP

SMART


GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no. 1012469 23.00 GBP

Product	Prod. no.	GBP
Fitu | Single ceiling rosette		
○ white	1004745	31.00
ENOLA® 2.0/BIMA 2.0 M, decorative ring		
● black	1011749	4.00
○ white	1011750	4.00
● gold	1011751	4.00
● copper	1011752	4.00

ENOLA® 2.0 M
PD, SIX. LONG, GU10, QPAR51

NEW

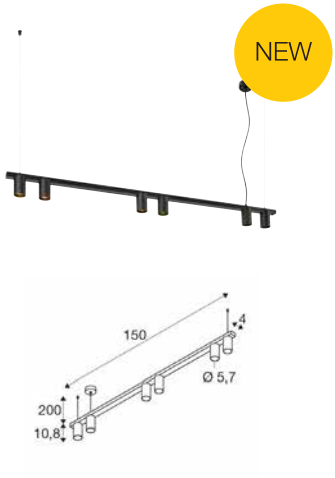

IP20 IK02 200 cm

220-240 V ~50/60 Hz
Material: aluminium/steel/plastic PC

SOCKET INSIDE 10 W

Base: 6xGU10 max. Ø: 5.1 cm | L: 6 cm

Variant	Prod. no.	GBP
● black	1011907	310.00
○ white	1011908	310.00

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

C,L

Prod. no. 1005077 7.00 GBP

SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no. 1012469 23.00 GBP

Product	Prod. no.	GBP
Fitu | Single ceiling rosette		
○ white	1004745	31.00
ENOLA® 2.0/BIMA 2.0 M, decorative ring		
● black	1011749	4.00
○ white	1011750	4.00
● gold	1011751	4.00
● copper	1011752	4.00

ENOLA® 2.0 S
DECORATIVE RING

NEW



Ø: 3.9 cm
H: 1.1 cm
Material: plastic PC

Variant	Prod. no.	GBP
● black	1011753	4.00
○ white	1011754	4.00
● gold	1011755	4.00
● copper	1011756	4.00

ENOLA® 2.0/BIMA 2.0 M
DECORATIVE RING

NEW



Ø: 5.4 cm
H: 2 cm
Material: plastic PC

Variant	Prod. no.	GBP
● black	1011749	4.00
○ white	1011750	4.00
● gold	1011751	4.00
● copper	1011752	4.00



ASTO TUBE
PD, GU 10

IP20 250 cm

220-240 V ~50/60 Hz
Material: aluminium

• Decorative rings available as accessories

SOCKET INSIDE 10 W

Base: 1-4xGU10

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no. **1005077** **7.00 GBP**

SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F


Prod. no. **1012469** **23.00 GBP**

ASTO TUBE
PD, SINGLE, GU 10



Variant	Prod. no.	GBP
● black	**1006431**	**52.00**
○ white	**1006432**	**52.00**

ASTO TUBE
PD, DOUBLE, GU 10

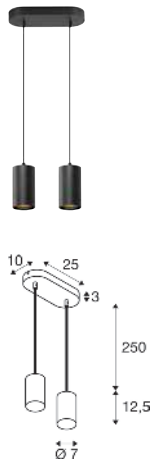

Variant	Prod. no.	GBP
● black	**1006433**	**96.00**
○ white	**1006434**	**96.00**


ASTO TUBE
DECORATIVE REFLECTOR



Ø: 6.8 cm
H: 4 cm
Material: polycarbonate (PC)

Variant	Prod. no.	GBP
black/chrome	**1007190**	**4.00**
gold	**1006450**	**4.00**
chrome	**1006449**	**4.00**
copper	**1006451**	**4.00**

ASTO TUBE
PD, TRIPLE, GU 10

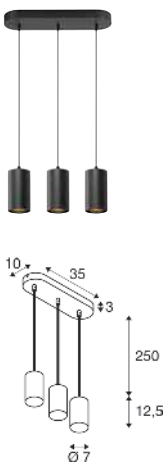

Variant	Prod. no.	GBP
● black	**1006435**	**138.00**
○ white	**1006436**	**138.00**

ASTO TUBE
PD, QUADRUPLE, GU 10




Variant	Prod. no.	GBP
● black	**1006437**	**168.00**
○ white	**1006438**	**168.00**



GLENOS® 2.0
PD, 1,2 M, DALI, UGR19

NEW







200-240 V ~0/50/60 Hz | 1050 mA
Total wattage: 38 W
Material: aluminium

LED INSIDE CRI 80

1012154	Down	3000 K / 2050 lm
	Up	3000 K / 3900 lm
1012155	Down	3000 K / 1800 lm
	Up	3000 K / 3850 lm
1012156	Down	4000 K / 2100 lm
	Up	4000 K / 4150 lm
1012157	Down	4000 K / 1850 lm
	Up	4000 K / 3950 lm

Variant	Prod. no.	GBP
● black 3000 K	**1012155**	**302.00**
● black 4000 K	**1012157**	**302.00**
○ white 3000 K	**1012154**	**302.00**
○ white 4000 K	**1012156**	**302.00**

GLENOS® 2.0
PD, 1,5 M, DALI, UGR19



Dali · Touch · IP20 · 100 000 h L80B20 · 200 cm · 20

200-240 V ~0/50/60 Hz | 1250 mA
Total wattage: 46 W
Material: aluminium

LED INSIDE · CRI 80

1012158	Down	3000 K / 2700 lm
	Up	3000 K / 4800 lm
1012159	Down	3000 K / 2350 lm
	Up	3000 K / 4350 lm
1012160	Down	4000 K / 2800 lm
	Up	4000 K / 4850 lm
1012161	Down	4000 K / 2400 lm
	Up	4000 K / 4800 lm

Variant	Prod. no.	GBP
● black 3000 K	1012159	344.00
● black 4000 K	1012161	344.00
○ white 3000 K	1012158	344.00
○ white 4000 K	1012160	344.00

GLENOS® PRO
PD, 1,2 M, DALI, UGR16



Dali · Touch · IP20 · IK02 · 140° · 75° · 100 000 h L80B20 · 210 cm · UGR 16 · 15

220-240 V ~0/50/60 Hz | 1600 mA
Total wattage: 60 W
Material: Aluminium/Plastic PC

LED INSIDE · CRI 90

1010509 1010510	Down	3000 K / 3200 lm
	Up	3000 K / 4300 lm
1010511 1010512	Down	4000 K / 3400 lm
	Up	4000 K / 4400 lm

Variant	Prod. no.	GBP
● black 3000 K	1010510	399.00
● black 4000 K	1010512	399.00
◑ white/black 3000 K	1010509	399.00
◑ white/black 4000 K	1010511	399.00

GLENOS® PRO
PD, 1,5M, DALI, UGR16



Dali · Touch · IP20 · IK02 · 140° · 75° · 100 000 h L80B20 · 210 cm · UGR 16 · 13

220-240 V ~0/50/60 Hz | 1850 mA
Total wattage: 70 W
Material: Aluminium/Plastic PC

LED INSIDE · CRI 90


1010513 1010514	Down	3000 K / 3600 lm
	Up	3000 K / 4900 lm
1010515 1010516	Down	4000 K / 3850 lm
	Up	4000 K / 5550 lm

Variant	Prod. no.	GBP
● black 3000 K	1010514	436.00
● black 4000 K	1010516	436.00
◑ white/black 3000 K	1010513	436.00
◑ white/black 4000 K	1010515	436.00


1006345 251

WORKLIGHT PRO 120
PD, DALI





Dali · Touch · IP20 · IK03 · 115° · 80° · 50000 h L80B10 · 250 cm · UGR 19

220-240 V ~50/60 Hz | 1200 mA
Total wattage: 50 W
Material: aluminium/steel


INSIDE

Down	4000 K	3300 lm
Up	4000 K	2800 lm

Variant	Prod. no.	GBP
● black	1007468	436.00
○ white	1007469	436.00
● grey	1007470	436.00

WORKLIGHT PRO 150
PD, DALI





Dali · Touch · IP20 · IK03 · 115° · 80° · 50000 h L80B10 · 250 cm · UGR 19

220-240 V ~50/60 Hz | 1400 mA
Total wattage: 59 W
Material: aluminium/steel


INSIDE CRI 80

Down	4000 K	3900 lm
Up	4000 K	3300 lm

Variant	Prod. no.	GBP
● black	1007471	520.00
○ white	1007472	520.00
● grey	1007473	520.00

WORKLIGHT
PD, DALI





Dali · IP20 · IK02 · 110° · 80° · 50000 h L80B10 · 250 cm · UGR 19

220-240 V ~50/60 Hz | 1550 mA
Total wattage: 57 W
Material: aluminium

- Safety plug


INSIDE CRI 80


Down	4000 K	3000 lm
Up	4000 K	2000 lm

Variant	Prod. no.	GBP
● black	1005395	407.00
○ white	1005396	407.00
● grey	1006345	407.00


1010429 253

PANEL 60
PD, ROUND, PHASE

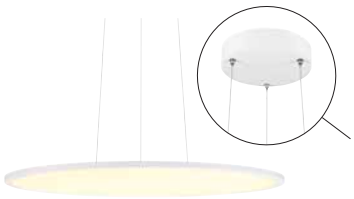



C,L · IP20 · IK02 · 90° · 50 000 h L80B10 · 200 cm · UGR 19


220-240 V ~50/60 Hz | 750 mA
Total wattage: 29 W
Material: aluminium/steel


LED INSIDE · CCT · CRI 90

3000 K	4000 K
3050 lm	3300 lm

Variant	Prod. no.	GBP
○ white	**1010426**	**273.00**
● grey	**1010427**	**273.00**

PANEL 60
PD, ROUND, DALI

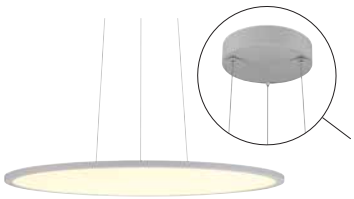



Dali · Touch · IP20 · IK02 · 90° · 50 000 h L80B10 · 200 cm · UGR 19

220-240 V ~50/60 Hz | 750 mA
Total wattage: 29 W
Material: aluminium/steel

LED INSIDE · CCT · CRI 90

3000 K	4000 K
3050 lm	3300 lm


Variant	Prod. no.	GBP
○ white	**1010428**	**281.00**
● grey	**1010429**	**281.00**



1009014 + 1010408 255

GRIP! FLAT
PD, PHASE





C,L | IP20 | 50000 h L70B50 | 200 cm | UGR 15

220-240 V ~50/60 Hz | 500 mA
Total wattage: 16 W

- Including colour temperature switch 2700K/3000K
- Honeycomb included


LED INSIDE | CCT | CRI 90

	2700 K	3000 K
Down	400 lm	430 lm

Variant	Prod. no.	GBP
black/gold	1009014	247.00
white/black	1009015	247.00

Product	Prod. no.	GBP
GRIP! FLAT, decorative ring		
black	1009102	28.00
white	1009103	28.00
gold	1009104	28.00


GRIP! FLAT
FELT SHADE Ø 50 CM X 6.2 CM



Ø: 50 cm
H: 6.2 cm

Variant	Prod. no.	GBP
anthracite	1010403	121.00
grey	1010404	121.00
ochre	1010405	121.00

GRIP! FLAT
FELT SHADE Ø 50 CM X 0.6 CM




Ø: 50 cm
H: 0.6 cm

Variant	Prod. no.	GBP
anthracite	1010406	88.00
grey	1010407	88.00
ochre	1010408	88.00


1008617 257

OCULUS
PD, SINGLE, PHASE







220-240 V ~50/60 Hz | 250 mA
Total wattage: 11 W
Material: aluminium

- Additional frosted lens included
- Matching accessories can be found on page 259
- open cable end




	2000 K - 3000 K
Down	36 lm - 780 lm

Variant	Prod. no.	GBP
● black	**1004672**	**180.00**
○ white	**1004673**	**180.00**

OCULUS
PD, DTW, PVD







220-240 V ~50/60 Hz | 250 mA
Total wattage: 11 W
Material: aluminium




	2000 K - 3000 K
Down	36 lm - 780 lm

Variant	Prod. no.	GBP
brass	**1008616**	**256.00**
dark bronze	**1008615**	**256.00**
dark copper	**1008617**	**256.00**

FITU
PD, E27





IP20 500

220-240 V ~50/60 Hz
Material: aluminium

- Textile cable
- Matching accessories can be found on page 259
- open cable end

SOCKET INSIDE 60 W

Base: 1xE27

Variant	Prod. no.	GBP
● black	132690	52.00
○ white	132691	52.00

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F

Prod. no. 1005303 9.00 GBP


SMART

E27 | 9 W | 180°
806 lm | 2700 K | EEC = F

Prod. no. 1012471 14.00 GBP

FITU
PD, E27 STONE





IP20 500 cm 500 cm

220-240 V ~50/60 Hz
Material: stone

- open cable end

SOCKET INSIDE 15 W

Base: 1xE27


Variant	Prod. no.	GBP
● black	1010417	73.00
● grey	1010419	73.00
● beige	1010418	73.00

E27 | 6 W | 330°
260 lm | 1900 K |

Prod. no. 1008163 72.00 GBP

FITU
PD, E27 RIBBED





IP20 500 cm 500 cm

220-240 V ~50/60 Hz
Material: aluminium

- open cable end

SOCKET INSIDE 15 W

Base: 1xE27

Variant	Prod. no.	GBP
● black	1010420	52.00
● gold	1010421	52.00

E27 | 4 W | 325°
250 lm | 1800 K | EEC = G

Prod. no. 1008645 6.00 GBP

Better value as a set at ks-light.co.uk

Fitu | Single ceiling rosette

16A max.
H: 3.9 cm
Material: steel
Strain relief included



Variant	Prod. no.	GBP
● black	132600	23.00
○ white	132601	23.00
● gold	1002163	26.00
◑ chrome	132605	26.00

Fitu | triple ceiling rose

16A max.
H: 5.4 cm
Material: steel
Strain relief included



Variant	Prod. no.	GBP
● black	132610	55.00
○ white	132611	55.00

FITU | Surface-mounted ceiling rosette

16A max.
H: 2.6 cm
Ø: 9 cm
Material: steel



Variant	Prod. no.	GBP
● black	1004744	31.00
○ white	1004745	31.00
● gold	1006377	33.00

FITU | Recessed ceiling rosette

16A max.
H: 3.3 cm
Material: steel/polyamide 66 (PA)



Variant	Prod. no.	GBP
● black	1004674	21.00
○ white	1004675	21.00
● gold	1006378	24.00

FITU | Ceiling hook

L: 4.6 cm
Material: aluminium



Variant	Prod. no.	GBP
● black	132670	17.00
○ white	132671	17.00

1-phase light adapter

6A max.
H: 3.2 cm
L: 8.5 cm
W: 3.5 cm
Material: polycarbonate (PC)



Variant	Prod. no.	GBP
● black	143120	14.00
○ white	143121	14.00
● grey	143124	14.00

3-phase light adapter

10A max.
H: 4.5 cm
L: 9.6 cm
W: 3.5 cm
Material: plastic




Variant	Prod. no.	GBP
● black	145990	18.00
○ white	1001542	18.00
● grey	145994	18.00

FITU | Cable clamp

L: 3.1 cm
Material: aluminium




Variant	Prod. no.	GBP
● black	132680	11.00
○ white	132681	11.00

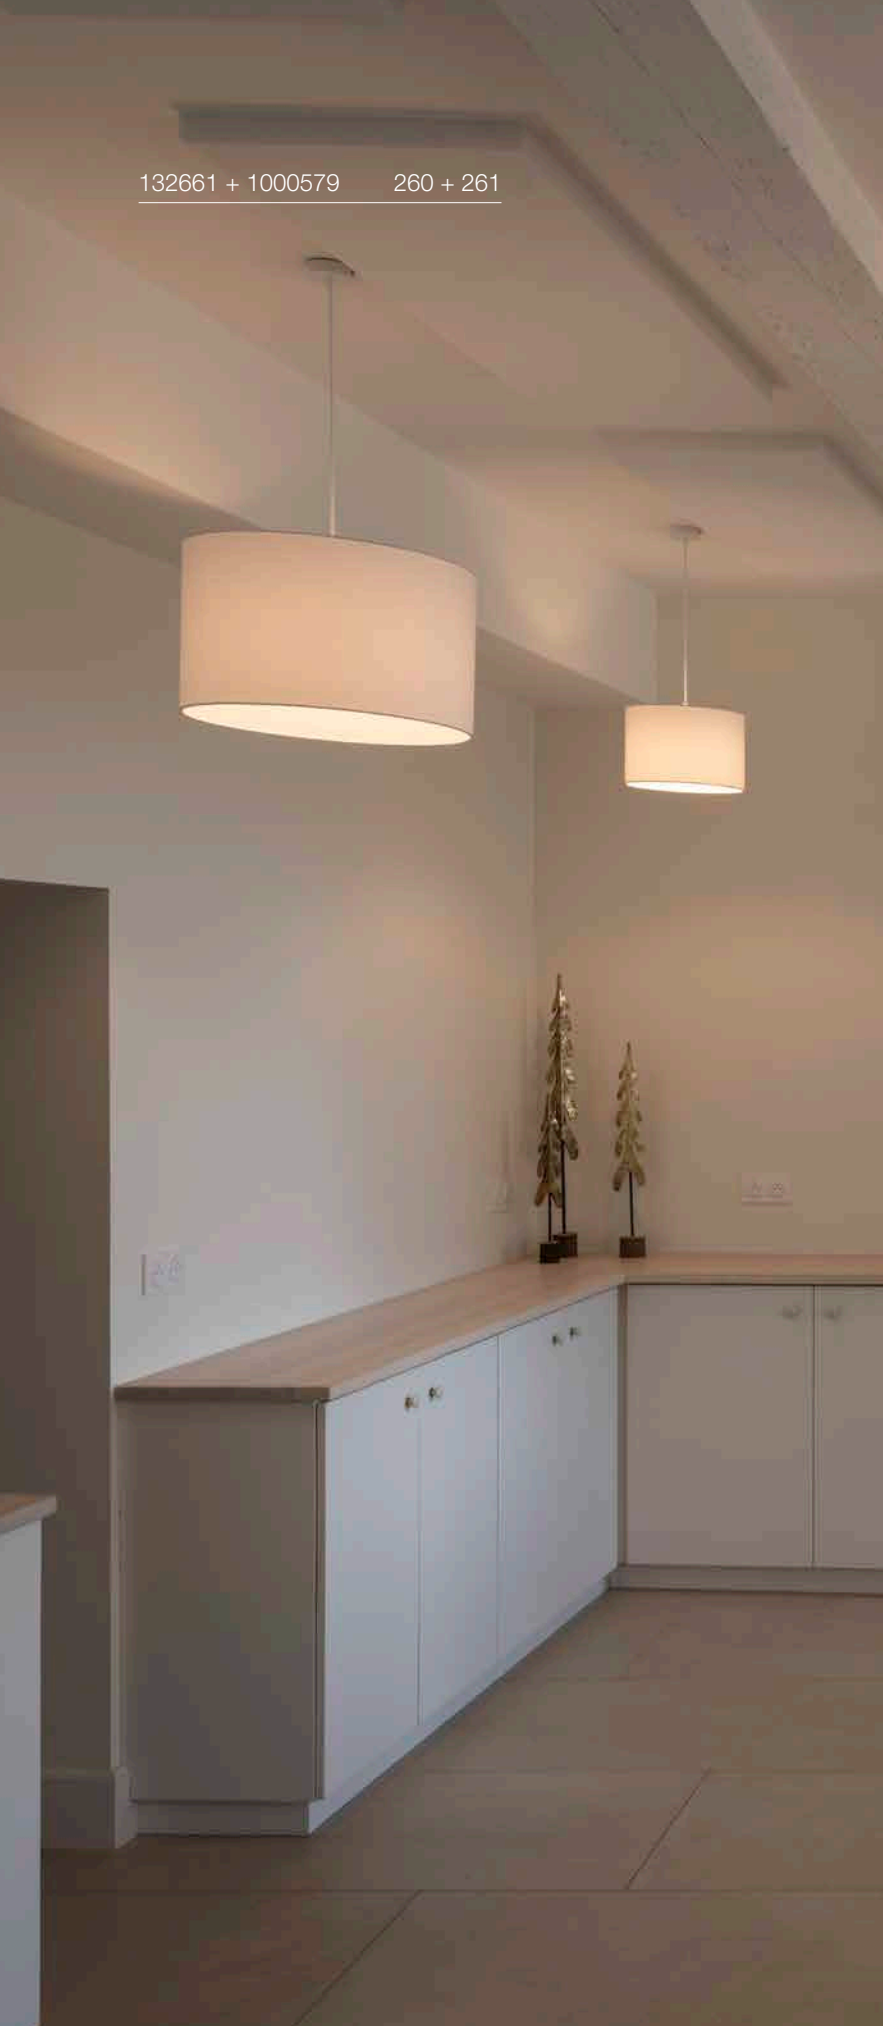

132661 + 1000579 260 + 261

FENDA
PD, E27





IP20 250

220-240 V ~50/60 Hz
Material: steel/plastic

- Matching accessories can be found on page 259
- open cable end

SOCKET INSIDE 60 W

Base: 1xE27

Variant	Prod. no.	GBP
● black	**132660**	**26.00**
○ white	**132661**	**26.00**

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F

C

Prod. no. **1005303** **9.00 GBP**

FENDA
30 CM, ROUND



Ø: 30 cm
H: 20 cm
Material: textile/steel

Variant	Prod. no.	GBP
black/copper	**155592**	**62.00**
white	**155582**	**47.00**
grey	**1004774**	**47.00**
beige	**155583**	**47.00**

FENDA
Ø 45 CM, ROUND



Ø: 45.5 cm
H: 28 cm
Material: textile/steel

Variant	Prod. no.	GBP
black/copper	**156122**	**77.00**
white	**156111**	**73.00**
grey	**1004775**	**73.00**
beige	**156113**	**73.00**

⊕

Product	Prod. no.	GBP
Acrylic glass cover, for FENDA Ø 45.5 cm		
white	**156100**	**39.00**

FENDA
Ø 70 CM, ROUND



Ø: 70 cm
H: 36 cm
Material: textile/steel

- Not suitable for Fenda Bow

Variant	Prod. no.	GBP
black/copper	**1000580**	**113.00**
white	**1000579**	**100.00**

⊕

Product	Prod. no.	GBP
Acrylic glass cover, for FENDA Ø 70 cm		
white	**1000957**	**82.00**

FENDA
GLASS SHADE 12.5 CM, ROUND



Ø: 12.5 cm
H: 20 cm
Material: glass

Variant	Prod. no.	GBP
brown	**1000773**	**57.00**

MIX & MATCH FENDA & FITU


The modular components of the FENDA and FITU ranges can be combined flexibly to create a wide variety of configurations. A wide selection of shades and bases enables bespoke lighting solutions for a broad range of applications.

FENDA TL
- *155780*

FENDA FL
- *155790*

FENDA TL
- *155540*

FENDA FL
- *155490*

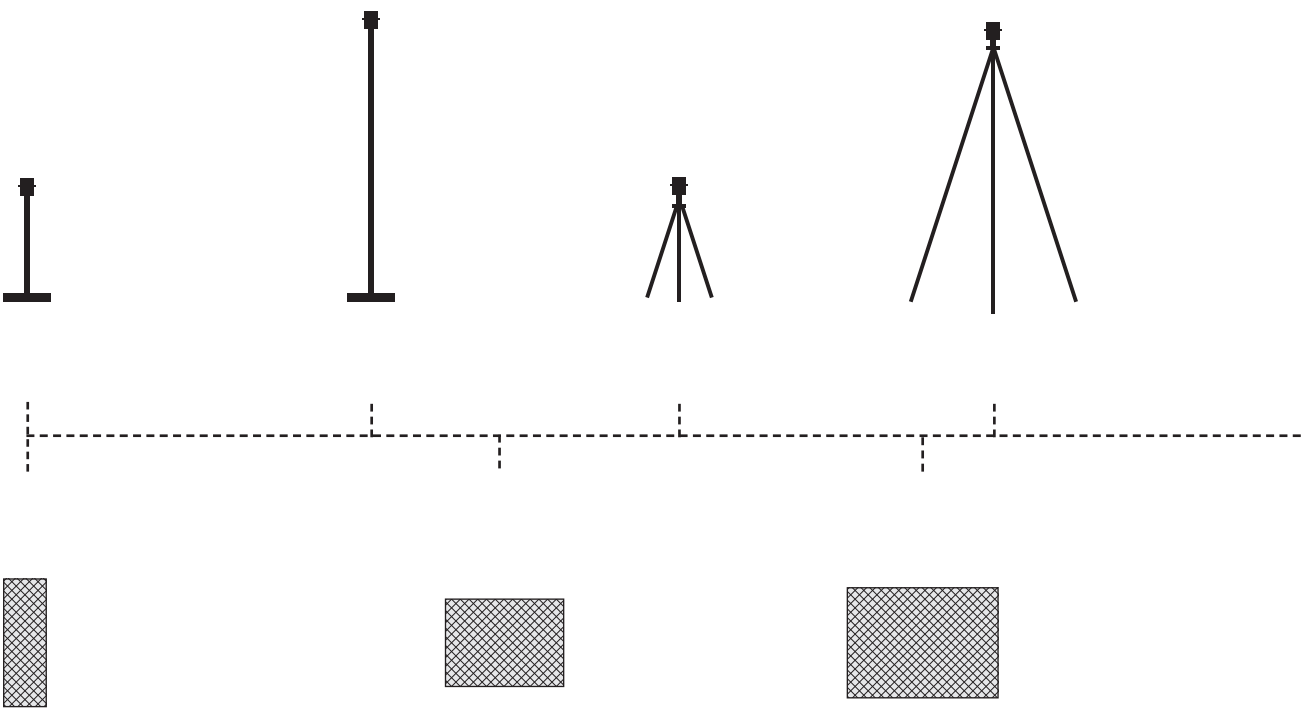

FENDA Ø15
- *156152*
- *156141*
- *156143*

FENDA Ø30
- *155592*
- *155582*
- *155583*
- *1004774*

FENDA Ø45
- *156122*
- *156111*
- *156113*
- *1004775*

All SLV Mix & Match products are identified by the corresponding symbol.

MIX match

FENDA PD

- ● *132660*
- ○ *132661*

FENDA CL

- ● *155550*
- ○ *155551*

FITU CRANE BASE

- ● *1004682*

FITU PD


- ● *132690*
- ○ *132691*


Stone

- ● *1010417*
- ● *1010418*
- ● *1010419*

Metal

- ● *1010420*
- ● *1010421*

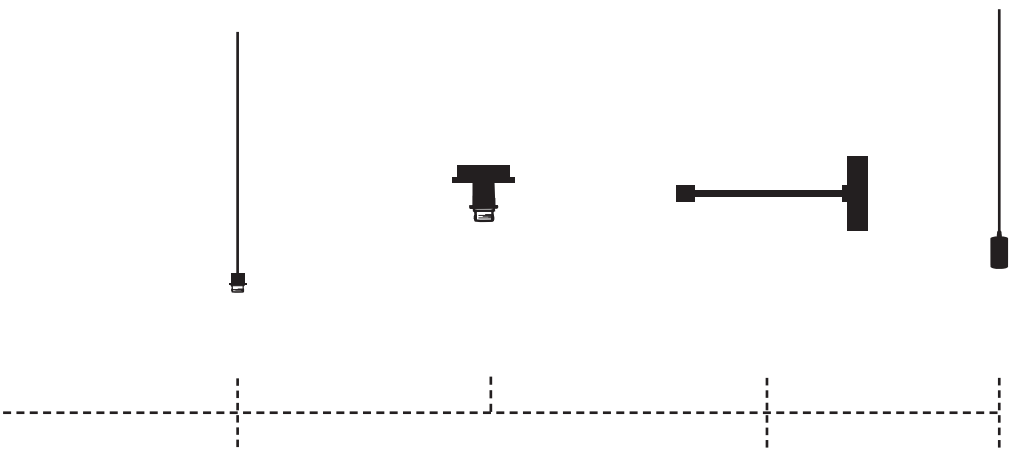



FENDA Ø70

- ● *1000580*
- ○ *1000579*




FENDA Ø12,5


Glass Shade

- ● *1000773*



HELIA 30
PD, PHASE








220-240 V ~50/60 Hz | 500 mA
Total wattage: 9.2 W
Material: aluminium




3000 K
590 lm

Variant	Prod. no.	GBP
● black	**152360**	**193.00**

HELIA 40
PD, PHASE





IP20 | 30° | 30000 h L70B50 | 150 cm

220-240 V ~50/60 Hz | 500 mA
Total wattage: 10 W
Material: aluminium


LED INSIDE | CRI 90

3000 K
730 lm

Variant	Prod. no.	GBP
● black	**152370**	**218.00**

PARA CONE 20
PD, E27





IP20 | 250 cm

220-240 V ~50/60 Hz
Material: aluminium/steel

SOCKET INSIDE | 60 W

Base: 1xE27


Variant	Prod. no.	GBP
black/gold	**1008129**	**100.00**
copper/white	**1008130**	**142.00**

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F

Prod. no. 1005303 9.00 GBP

PARA CONE 30
PD, E27





IP20 | 250 cm

220-240 V ~50/60 Hz
Material: aluminium/steel

SOCKET INSIDE | 60 W

Base: 1xE27


Variant	Prod. no.	GBP
black/gold	**1008131**	**172.00**
copper/white	**1008132**	**193.00**

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F

Prod. no. 1005303 9.00 GBP



PHELIA 10
PD, E27

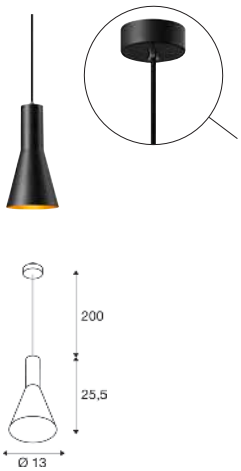

IP20 200 cm

220-240 V ~50/60 Hz
Material: aluminium

- Textile cable

SOCKET INSIDE 23 W

Base: 1xE27

Variant	Prod. no.	GBP
black/gold	**1002951**	**113.00**

E27 | 8 W | 180°
720 lm | 2700 K | EEC = F


Prod. no. **1005305** **17.00 GBP**

SMART

E27 | 9 W | 180°
806 lm | 2700 K | EEC = F

Prod. no. **1012471** **14.00 GBP**

PHELIA 25
PD, E27

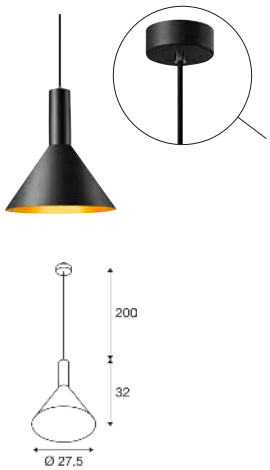

IP20 200 cm

220-240 V ~50/60 Hz
Material: aluminium

- Textile cable

SOCKET INSIDE 23 W

Base: 1xE27

Variant	Prod. no.	GBP
black/gold	**1002949**	**138.00**

E27 | 8 W | 180°
720 lm | 2700 K | EEC = F


Prod. no. **1005305** **17.00 GBP**

SMART

E27 | 9 W | 180°
806 lm | 2700 K | EEC = F

Prod. no. **1012471** **14.00 GBP**

PHELIA 30
PD, E27

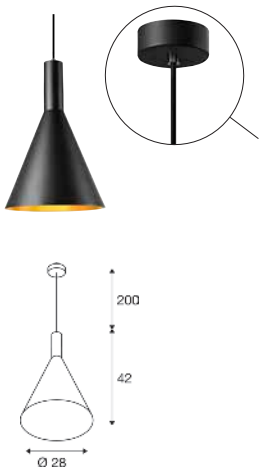

IP20 200 cm

220-240 V ~50/60 Hz
Material: aluminium

- Textile cable

SOCKET INSIDE 23 W

Base: 1xE27

Variant	Prod. no.	GBP
black/gold	**1002950**	**163.00**

E27 | 8 W | 320°
700 lm | 2500 K | EEC = F

Prod. no. **1005265** **23.00 GBP**

SMART


E27 | 9 W | 180°
806 lm | 2700 K | EEC = F

Prod. no. **1012471** **14.00 GBP**



FORCHINI 50
PD, E27





IP20 150 cm

220-240 V ~50/60 Hz
Material: GRP

SOCKET INSIDE 40 W

Base: 1xE27	L: 20 cm

Variant	Prod. no.	GBP
black/gold	**1008535**	**197.00**


E27 | 8 W | 320°
800 lm | 2700 K | EEC = F

C

Prod. no. **1005303** **9.00 GBP**

FORCHINI 70
PD, E27





IP20 150 cm

220-240 V ~50/60 Hz
Material: GRP

SOCKET INSIDE 40 W

Base: 1xE27 | L: 20 cm

Variant	Prod. no.	GBP
black/gold	**1008538**	**352.00**


E27 | 8 W | 320°
800 lm | 2700 K | EEC = F

C,L

Prod. no. **1005268** **11.00 GBP**

FORCHINI M 40
PD, E27





IP20 150 cm

220-240 V ~50/60 Hz
Material: Steel/Aluminium

SOCKET INSIDE 40 W

Base: 1xE27 | L: 15.2 cm

Variant	Prod. no.	GBP
black/gold	**1008536**	**197.00**


E27 | 8 W | 320°
800 lm | 2700 K | EEC = F

C,L

Prod. no. **1005268** **11.00 GBP**

FORCHINI M 50
PD, E27





IP20 150 cm

220-240 V ~50/60 Hz
Material: Steel/Aluminium

SOCKET INSIDE 40 W

Base: 1xE27 | L: 18 cm

Variant	Prod. no.	GBP
black/gold	**1008537**	**218.00**


E27 | 8 W | 330°
400 lm | 1900 K |

C

Prod. no. **1008159** **77.00 GBP**


165400 271

ROTOBALL 25
PD, E27

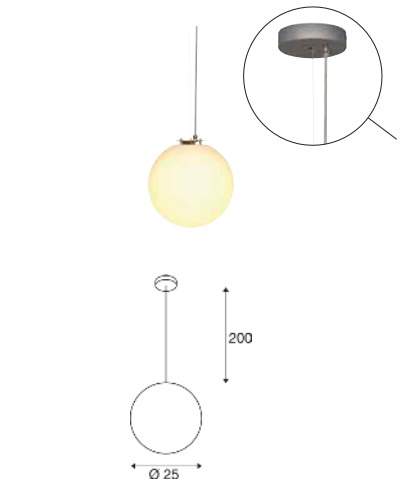

IP20 200 cm

220-240 V ~50/60 Hz
Material: Steel/Polyethylene (PE)

SOCKET INSIDE 24 W

Base: 1xE27 max. Ø: 7 cm

Variant	Prod. no.	GBP
○ white	**165390**	**138.00**

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F


Prod. no. 1005303 9.00 GBP

SMART

E27 | 9 W | 180°
806 lm | 2700 K | EEC = F

Prod. no. 1012471 14.00 GBP

ROTOBALL 40
PD, E27

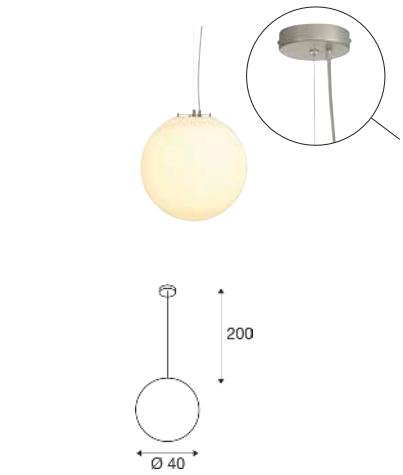

IP20 200 cm

220-240 V ~50/60 Hz
Material: Steel/Polyethylene (PE)

SOCKET INSIDE 24 W

Base: 1xE27 max. Ø: 9.5 cm

Variant	Prod. no.	GBP
○ white	**165410**	**155.00**

E27 | 13 W | 220°
1300 lm | 2700 K | EEC = F


Prod. no. 1005302 11.00 GBP

SMART

E27 | 9 W | 180°
806 lm | 2700 K | EEC = F

Prod. no. 1012471 14.00 GBP

ROTOBALL 50
PD, E27

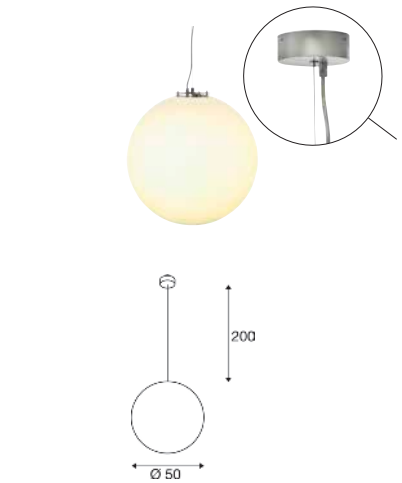

IP20 200 cm

220-240 V ~50/60 Hz
Material: Steel/Polyethylene (PE)

SOCKET INSIDE 24 W

Base: 1xE27 max. Ø: 9.5 cm

Variant	Prod. no.	GBP
○ white	**165400**	**193.00**

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F

Prod. no. 1005303 9.00 GBP

SMART


E27 | 9 W | 180°
806 lm | 2700 K | EEC = F

Prod. no. 1012471 14.00 GBP


1005216 273

PARA DOME
PD, E27





IP20 250

220-240 V ~50/60 Hz
Material: aluminium

• open cable end

SOCKET INSIDE 150 W

Base: 1xE27 max. Ø: 7 cm

Variant	Prod. no.	GBP
black	1005214	71.00
grey	1005215	71.00

E27 | 11 W | 330°
1250 lm | 2700 K | EEC = E

Prod. no. 1008162 72.00 GBP

Product	Prod. no.	GBP
Fitu | Single ceiling rosette		
chrome	132605	26.00
1-phase light adapter		
grey	143124	14.00
3-phase light adapter		
grey	145994	18.00
Ceiling rosette		
grey	210064	28.00
Recessed ceiling rosette		
chrome	1004676	24.00
PARA DOME | Shade		
black	1005216	88.00
grey	1005217	88.00
transparent	1005218	88.00
PARA DOME, Shade		
black/gold	1006410	88.00

PARA DOME
SHADE



IP20

Ø: 30.8 cm
H: 20.6 cm
Material: aluminium

Variant	Prod. no.	GBP
black/gold	1006410	88.00
black	1005216	88.00
grey	1005217	88.00

PARA DOME
SHADE




IP20

Ø: 31.5 cm
H: 20 cm
Material: polycarbonate (PC)

Variant	Prod. no.	GBP
transparent	1005218	88.00

PARA 380
PD, E27





IP20 150 cm

220-240 V ~50/60 Hz
Material: aluminium

SOCKET INSIDE 20 W

Base: 1xE27

Variant	Prod. no.	GBP
black	165359	142.00

E27 | 13 W | 220°
1300 lm | 2700 K | EEC = F

Prod. no. 1005302 11.00 GBP

SYMBOLS KEY

Recommendations
Displays accessories and recommended light bulbs for the chosen products

Mix & Match
Indicates products that can be combined

Energy efficiency class
"This light is suitable for bulbs with an energy efficiency rating of ..."

Protection classes
- Protection class I / Protective conductor
- Protection class II/ Protection by double or reinforced insulation
- Protection class III/ Protection by extra-low voltage

Dimmable with:
- **C** = Trailing-edge phase dimmer
- **L** = Leading-edge phase dimmer
- **Uni** = Universal dimmer
- **1–10 V**
- **Dali** = DALI bus system
- **Switch** = Switch/button or touch control on the light
- **Touch** = Simple, stepless operation; responds to touch

IP protection rating:
Indicates the suitability of electrical equipment for different environmental conditions.

IK impact resistance rating:
The IK impact resistance rating is a measure of the resistance of housings for electrical equipment to mechanical stress, especially impact stress.

Half-diffusion angle:
Describes the beam angle in degrees. The smaller the angle, the more concentrated the light will be.

Rotation and pivoting capacity in degrees:
- Rotation range
- Pivot range
- Gimballed

Preservation of luminous flux:
Describes the amount by which the luminous flux of an LED decreases during a specified period.

Unified Glare Rating:
The lower the UGR value, the lower the psychological glare.

Pendant cable length
in cm

Cable length:
Mains plugs, connectors and supply cables (with open cable end) in cm

Through-wiring possible

Shape of the installation opening

Specification of the installation depth

Drive-over capability of the product ensured

Weight-bearing capacity of the product up to the specified value in tonnes. Measurements based on installation in concrete.

Sea-air resistant coating

Independent converter:
Control equipment also for use outside of lights

Short-circuit protected safety control equipment

Light colour temperature in Kelvin (K)

Luminous flux in lumens (lm)

Dark Sky
Indicates that the light emits almost no light into the upper half-space (ULOR < 2 %). Reduces light pollution and ensures targeted, needs-based illumination of the usable area.

Primary/Replica
Indicates lights with integrated primary/replica function. A sensor light (primary) controls downstream lights (replica) via a switched phase, enabling simple, networked lighting control without additional bus or control systems.

Connected lighting:
Indicates smart products that use the following protocols:
- Zigbee®
- DALI
- Bluetooth

Allows the installation of electrical control equipment on materials whose flammability is not known.

CCT switch:
By means of an integrated CCT switch, the light colour can be changed from 2700 K, 3000 K, 4000 K to 6500 K during installation.

Dim-to-warm:
With dimmers, the light colour can be altered from cold white to warm white.

Indicates lights with RGB+W and RGB
(Red-Green-Blue + White and Red-Green-Blue)

Indicates lights with motion sensors
(Microwaves (MR) - Technology / Infrared / Radio)

Products with integrated LEDs

Products with light socket

KS Licht – Your lighting wholesaler in Essen

Contact, customer service and information for customers
BIG WHITE 2027

Directly linked to our product range, advice and project services:

In the KS Multi Brand Business online shop, you will find the latest products, new releases and special offers, as well as information to support you with advice, quotations and project management:

- Online stock availability check
- Catalogues, browsable catalogues and product links
- Technical data, tender specifications, light distribution curves and LDT files
- Easily find and order spare parts
- View your individual terms and conditions, delivery and payment terms
- Relevant product recommendations, variants and alternative products
- Direct contact with our sales team

Customer Information

All prices are net, plus statutory VAT. The retail prices quoted are recommended retail prices. Upon publication of this catalogue, previous price lists cease to be valid.
Illustrations, colours, shapes, designs and technical specifications are for illustrative purposes only and are not binding. Subject to changes and errors.
Goods are generally dispatched ex works, carriage forward.
For orders with a net value of less than €70.00, a minimum order surcharge of €8.00 will be applied.

Ordering & Delivery

When placing orders, please always specify the item number, colour and quantity. This reduces the need for follow-up enquiries and speeds up processing.
Express and direct deliveries are available on request.
Custom-made items, components assembled to the customer's specifications and lamps are excluded from exchange.
Our General Terms and Conditions apply and are available at www.ks-germany.com/de/agb.

Kontakt

KS Licht- und Elektrotechnik GmbH
Manderscheidtstraße 8 c
45141 Essen
Germany

Verkauf & Service
Tel.: +49 (0)201-89924-0
verkauf@ks-germany.com

Online
ks-light.co.uk
www.ks-germany.com

Pflichtangaben

KS Licht- und Elektrotechnik GmbH · Sitz der Gesellschaft: Essen · Geschäftsführer: Kai Becker
Registergericht: Amtsgericht Essen · Handelsregister: HRB 12736 · Steuer-Nr.: 111/5708/2689 ·
USt-IdNr.: DE190673411

KS Licht- und Elektrotechnik GmbH
Manderscheidtstraße 8 c
45141 Essen
Germany

Tel.: +49 (0)201-89924-0

B2B-Shop: **ks-light.co.uk**
Website: www.ks-germany.com
E-Mail: verkauf@ks-germany.com

Opening hours
Monday – Thursday 08:00 – 16:30
Friday 08:00 – 15:00