
BIG WHITE®
2027

SLV LIGHTING CATALOGUE



RECESSED LIGHTS


INDOOR | RECESSED LIGHTS



UNIVERSAL DOWNLIGHT SLIM | 12



UNIVERSAL DOWNLIGHT FIX | 12



UNIVERSAL DOWNLIGHT MOVE | 12



KADUX | 14



KADUX | 15



KADUX | 15



KADUX | 15



KADUX | 16–17



NUMINOS® | 18–26



NUMINOS® MOVE | 28–36



NUMINOS® GIMBLE | 38–46



DYSKO | 57





NEW TRIA® | 58–63, 66–73



NEW TRIA® UNIVERSAL | 64–65



NEW TRIA® | 86



NEW TRIA® | 87



GLENOS® PRO | 87



MEDO® | 88–89



HORN MINI | 90



HORN | 91–93



HORN 1 | 92



HORN T | 93



HORN MAGNA



SENSER 2.0 | 94–101





DOWNLIGHT VARIO | 102–103

VERLUX | 104



DL 126 | 105



PIKA | 105



OCULUS | 107

OCCULDAS | 107

NEW



ENOLA® 2.0 | 108–109

NEW



ENOLA® 2.0 | 108–109



KARPO | 110

NEW



GRIP! | 111



GRIP! | 111





PLASTRA | 113



VARU | 113





DOLIX OUT | 114–115



KINI | 115

AKALO D83 | 115

FRAME BASIC | 116–117



FRAME CURVE | 117

NOTAPO | 119



DOWNUNDER PUR | 120–121



MOBALA | 121


WORO | 121



PATTA-I | 122




PATTA-I | 122–123



PATTA-F | 123

UNIVERSAL DOWNLIGHT SLIM
RL, PHASE







220-240 V ~50/60 Hz | 185 mA
Total Wattage: 6 W
Material: Aluminium/Plastic PC


- Airtight and suitable for installation in insulation
- Complies with the requirements of RE2020 and NF C15-100

6 W	2700 K	3000 K	4000 K
	560 lm	590 lm	580 lm

Variant	Prod. no.	GBP
● black	**1012624**	**24.00**
○ white	**1012623**	**24.00**

UNIVERSAL DOWNLIGHT FIX
RL, LED, PHASE, IP65







220-240 V ~50/60 Hz | 60 mA
Total Wattage: 5 W / 7 W
Material: Steel/PC plastic


- Airtight and suitable for installation in insulation.
- Tested for use in specified fire-retardant suspended ceilings
- Lockable springs for easier installation

5 W	2700 K	3000 K	4000 K	6500 K
	470 lm	490 lm	500 lm	490 lm
7 W	2700 K	3000 K	4000 K	6500 K
	670 lm	680 lm	690 lm	680 lm

Variant	Prod. no.	GBP
● black	**1011209**	**26.00**
○ white	**1011208**	**26.00**

UNIVERSAL DOWNLIGHT MOVE
RL, LED, PHASE







220-240 V ~50/60 Hz | 60 mA
Total Wattage: 5 W / 7 W
Material: Steel/PC plastic

- Tested for use in specified fire-retardant suspended ceilings,
- Lockable springs for easier installation

5 W	2700 K	3000 K	4000 K	6500 K
	470 lm	490 lm	500 lm	490 lm
7 W	2700 K	3000 K	4000 K	6500 K
	670 lm	680 lm	690 lm	680 lm

Variant	Prod. no.	GBP
● black	**1011211**	**26.00**
○ white	**1011210**	**26.00**

UNIVERSAL DOWNLIGHT
COVER, RIGID, ROUND, IP65



IP20/ IP65

Ø: 8.8 cm
H: 0.5 cm
Material: Polycarbonate (PC)

- IP65 in conjunction with the universal downlight module

Variant	Prod. no.	GBP
● black	**1008067**	**3.00**
○ white	**1008068**	**3.00**
● gold	**1008070**	**4.00**
◑ chrome	**1008069**	**4.00**

UNIVERSAL DOWNLIGHT
COVER, RIGID, SQUARE, IP65



IP20/ IP65

L: 8.8 cm
W: 8.8 cm
H: 0.6 cm
Material: Plastic PC

- IP65 in conjunction with the universal downlight module

Variant	Prod. no.	GBP
● black	**1008096**	**3.00**
○ white	**1008095**	**3.00**
● gold	**1008098**	**4.00**
◑ chrome	**1008097**	**4.00**

UNIVERSAL DOWNLIGHT
COVER, PIVOTING, ROUND, IP20



IP20

Ø: 8.8 cm
H: 0.4 cm
Material: Polycarbonate (PC)

Variant	Prod. no.	GBP
● black	**1007091**	**3.00**
○ white	**1007092**	**3.00**
● gold	**1007191**	**4.00**
◑ aluminium	**1007093**	**4.00**


UNIVERSAL DOWNLIGHT
COVER, PIVOTING, SQUARE, IP20



IP20

L: 8.8 cm
W: 8.8 cm
H: 0.4 cm
Material: Polycarbonate (PC)


Variant	Prod. no.	GBP
● black	**1007184**	**4.00**
○ white	**1007185**	**4.00**
● gold	**1007194**	**5.00**
◑ aluminium	**1007186**	**5.00**

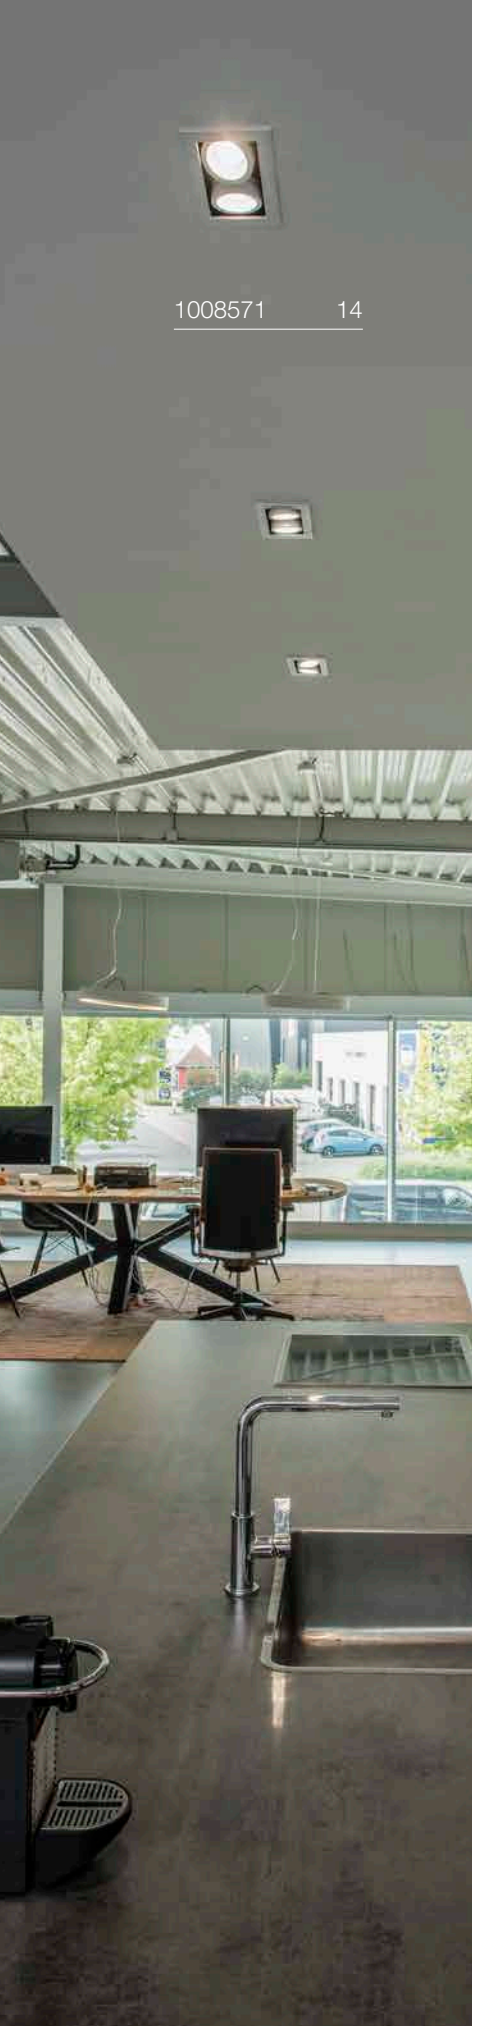

1008571 14

KADUX
DL, SINGLE, DALI





Dali Touch IP20 IK02 30° 20° 50 000 h L80B10 40

220-240 V ~50/60 Hz | 700 mA
Total wattage: 27 W
Material: Aluminium/Steel


LED INSIDE CRI 90

1008567 **1008568**	Down	3000 K / 3050 lm
1008569 **1008570**	Down	4000 K / 3350 lm

Variant	Prod. no.	GBP
● black 3000 K	**1008568**	**201.00**
● black 4000 K	**1008570**	**201.00**
○ white 3000 K	**1008567**	**201.00**
○ white 4000 K	**1008569**	**201.00**

KADUX
DL, DOUBLE, DALI



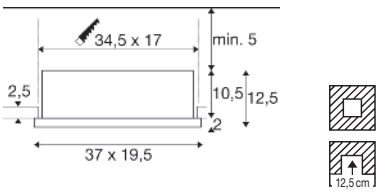

Dali Touch IP20 IK02 2x 30° 20° 50 000 h L80B10 30

220-240 V ~50/60 Hz | 1400 mA
Total wattage: 54 W
Material: Aluminium/Steel


LED INSIDE CRI 90

1008571	Down	3000 K / 3150 lm
1008572	Down	3000 K / 3250 lm
1008573	Down	4000 K / 3400 lm
1008574	Down	4000 K / 3400 lm

Variant	Prod. no.	GBP
● black 3000 K	**1008572**	**348.00**
● black 4000 K	**1008574**	**348.00**
○ white 3000 K	**1008571**	**348.00**
○ white 4000 K	**1008573**	**348.00**

KADUX
DL, SINGLE, PHASE



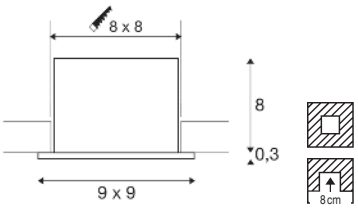



220-240 V ~50/60 Hz | 350 mA
Total wattage: 8.3 W
Material: Aluminium/Acrylic

- Spring clips


INSIDE CRI 90

3000 K	
770 lm	

Variant	Prod. no.	GBP
● black	**1007551**	**73.00**
○ white	**1007552**	**73.00**

KADUX
DL, DOUBLE, PHASE



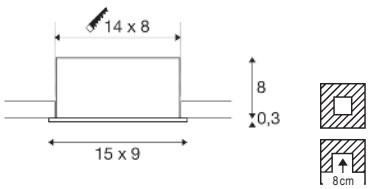



220-240 V ~50/60 Hz | 350 mA
Total Wattage: 14 W
Material: Aluminium/Steel

- Spring clips


INSIDE CRI 90

Down	3000 K
	775 lm
Down	3000 K
	775 lm

Variant	Prod. no.	GBP
● black	**1007559**	**138.00**
○ white	**1007560**	**138.00**

KADUX
DL, TRIPLE, PHASE



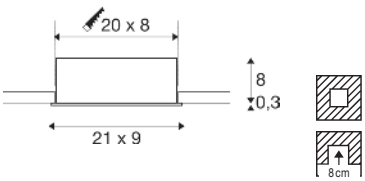



220-240 V ~50/60 Hz | 350 mA
Total Wattage: 20 W
Material: Aluminium/Steel

- Spring clips


INSIDE CRI 90

Down	3000 K
	775 lm
Down	3000 K
	775 lm
Down	3000 K
	775 lm

Variant	Prod. no.	GBP
● black	**1007567**	**184.00**
○ white	**1007568**	**184.00**

KADUX
EL, SINGLE, QPAR51





IP20 30°

220-240 V ~50/60 Hz
Material: Aluminium/Steel

- Spring clips

SOCKET INSIDE 50 W

Base: 1xGU10

Variant	Prod. no.	GBP
● black	**115510**	**29.00**
○ white	**115511**	**29.00**

GU10 | 6 W | 36°
360 lm | 2200 K-2700 K | EEC = G C

Prod. no.: 1005273 9.00 GBP


SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: 1012469 23.00 GBP

KADUX
EL, DOUBLE, QPAR51





IP20 30°

220-240 V ~50/60 Hz
Material: Aluminium/Steel

- Spring clips

SOCKET INSIDE 50 W

Base: 2xGU10


Variant	Prod. no.	GBP
● black	**115520**	**53.00**
○ white	**115521**	**53.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F C,L

Prod. no.: 1005077 7.00 GBP

KADUX
EL, TRIPLE, QPAR51





IP20 30°

220-240 V ~50/60 Hz
Material: Aluminium/Steel

- Spring clips

SOCKET INSIDE 50 W

Base: 3xGU10


Variant	Prod. no.	GBP
● black	**115530**	**72.00**
○ white	**115531**	**72.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F C,L

Prod. no.: 1005077 7.00 GBP

KADUX
EL, SINGLE, QPAR111





IP20 20°

220-240 V ~50/60 Hz
Material: Aluminium/Steel

- Spring clips

SOCKET INSIDE 75 W

Base: 1xGU10

Variant	Prod. no.	GBP
● black	**115540**	**92.00**
○ white	**115541**	**92.00**


GU10 | 12 W | 55°
670 lm | 2700 K | EEC = G

C,L

Prod. no.: 1005297 73.00 GBP

KADUX
EL, DOUBLE, QPAR111





IP20 20°

220-240 V ~50/60 Hz
Material: Aluminium/Steel

- Spring clips

SOCKET INSIDE 75 W

Base: 2xGU10

Variant	Prod. no.	GBP
● black	**115550**	**142.00**
○ white	**115551**	**142.00**


GU10 | 8 W | 38°
680 lm | 2700 K | EEC = F

C,L

Prod. no.: 1005274 26.00 GBP

NUMINOS® XS
DL






IP20 IK02 50 000 h L90B10 10 cm LED INSIDE CRI 90

200 mA
Power Consumption: 6.9 W
Material: Aluminium/Plastic PC

- Material thickness of mounting surface: max. 25 mm
- Low-voltage plug
- Driver not included

Variant	GBP
All XS versions	**60.00**


Product	Prod. no.	GBP
Decorative reflector		
gold	**1010125**	**8.00**
copper	**1010126**	**8.00**



● Black



● Black



○ White



● Black



○ White

Note:
Suitable drivers and reducer rings can be found on pages 50-55.

			UGR	Prod. no.	
2700 K	900 lm	20°	19	**1009271**	
		40°	22	**1009274**	
		55°	25	**1009277**	
3000 K	950 lm	20°	19	**1009289**	
		40°	22	**1009292**	
		55°	25	**1009295**	
4000 K	1000 lm	20°	19	**1009307**	
		40°	22	**1009310**	
		55°	25	**1009313**	
2700 K	900 lm	20°	19	**1009280**	
		40°	22	**1009283**	
		55°	25	**1009286**	
3000 K	950 lm	20°	19	**1009298**	
		40°	22	**1009301**	
		55°	25	**1009304**	
4000 K	1000 lm	20°	19	**1009316**	
		40°	22	**1009319**	
		55°	25	**1009322**	
2700 K	900 lm	20°	19	**1009281**	
		40°	22	**1009284**	
		55°	25	**1009287**	
3000 K	950 lm	20°	19	**1009299**	
		40°	22	**1009302**	
		55°	25	**1009305**	
4000 K	1000 lm	20°	19	**1009317**	
		40°	22	**1009320**	
		55°	25	**1009323**	







Configure further items and colours at ks-light.co.uk


DIFFUSERS



	Elliptical diffuser	Prismatic diffuser	Frosted diffuser	Honeycomb diffuser
	XS			
Prod. no.	**1005612**	**1005613**	**1005614**	**1005615**
GBP	**5.00**	**5.00**	**5.00**	**8.00**

NUMINOS® S
DL








200 mA
Power Consumption: 6.7 W
Material: Aluminium/Plastic PC

- Material thickness of mounting surface: max. 25 mm
- Low-voltage plug
- Driver not included

Variant	GBP
All S Versions	**62.00**

⊕


Product	Prod. no.	GBP
Decorative reflector		
gold	**1010127**	**8.00**
copper	**1010128**	**8.00**



● Black



● Black



○ White



● Black



○ White

Note:
Suitable drivers and reducer rings can be found on pages 50-55.

			UGR	Prod. no.	
2700 K	1000 lm	20°	19	1009433	
		40°	19	1009436	
		55°	22	1009439	
3000 K	1050 lm	20°	19	1009451	
		40°	19	1009454	
		55°	22	1009457	
4000 K		20°	19	1009469	
		40°	19	1009472	
		55°	22	1009475	
2700 K	1000 lm	20°	19	1009442	
		40°	19	1009445	
		55°	22	1009448	
3000 K	1050 lm	20°	19	1009460	
		40°	19	1009463	
		55°	22	1009466	
4000 K		20°	19	1009478	
		40°	19	1009481	
		55°	22	1009484	
2700 K	1000 lm	20°	19	1009443	
		40°	19	1009446	
		55°	22	1009449	
3000 K	1050 lm	20°	19	1009461	
		40°	19	1009464	
		55°	22	1009467	
4000 K		20°	19	1009479	
		40°	19	1009482	
		55°	22	1009485	


Configure further items and colours at ks-light.co.uk

DIFFUSERS

				
	Elliptical diffuser	Prismatic diffuser	Frosted diffuser	Honeycomb diffuser
		S		
Prod. no.	1010682	1010680	1010681	1010679
GBP	5.00	5.00	5.00	8.00

NUMINOS® M
DL








350 mA
Power consumption: 12 W
Material: Aluminium/Plastic PC

- Material thickness of mounting surface: max. 25 mm
- Low-voltage plug
- Driver not included

Variant	GBP
All M Versions	**75.00**


Product	Prod. no.	GBP
Decorative reflector		
gold	**1010129**	**10.00**
copper	**1010130**	**9.00**



● Black



● Black



○ White



● Black



○ White

Note:
Suitable drivers and reducer rings can be found on pages 50-55.

			UGR	Prod. no.	
2700 K	1700 lm	20°	19	1009595	
		40°	19	1009598	
		55°	22	1009601	
3000 K	1800 lm	20°	19	1009613	
		40°	19	1009616	
		55°	22	1009619	
4000 K	1900 lm	20°	19	1009631	
		40°	19	1009634	
		55°	22	1009637	
2700 K	1700 lm	20°	19	1009604	
		40°	19	1009607	
		55°	22	1009610	
3000 K	1800 lm	20°	19	1009622	
		40°	19	1009625	
		55°	22	1009628	
4000 K	1900 lm	20°	19	1009640	
		40°	19	1009643	
		55°	22	1009646	
2700 K	1700 lm	20°	19	1009605	
		40°	19	1009608	
		55°	22	1009611	
3000 K	1800 lm	20°	19	1009623	
		40°	19	1009626	
		55°	22	1009629	
4000 K	1900 lm	20°	19	1009641	
		40°	19	1009644	
		55°	22	1009647	


Configure further items and colours at ks-light.co.uk

DIFFUSERS

				
	Elliptical diffuser	**Prismatic diffuser**	**Frosted diffuser**	**Honeycomb diffuser**
		M		
Prod. no.	**1010686**	**1010684**	**1010685**	**1010683**
GBP	**5.00**	**6.00**	**6.00**	**12.00**

NUMINOS® L
DL








500 mA
Power Consumption: 17 W
Material: Aluminium/Plastic PC

- Material thickness of mounting surface: max. 25 mm
- Low-voltage plug
- Driver not included

Variant	GBP
All L Versions	**92.00**

⊕


Product	Prod. no.	GBP
Decorative Reflector		
gold	**1010131**	**10.00**
copper	**1010132**	**9.00**



● Black



● Black



○ White



● Black



○ White

Note:
Suitable drivers and reducer rings can be found on pages 50-55.

				Prod. no.	
2700 K	2400 lm	20°	19	1009757	
		40°	22	1010160	
		55°	22	1009762	
3000 K	2500 lm	20°	19	1009774	
		40°	22	1009777	
		55°	22	1009780	
4000 K	2700 lm	20°	19	1009792	
		40°	22	1009795	
		55°	22	1009798	
2700 K	2400 lm	20°	19	1009765	
		40°	22	1009768	
		55°	22	1009771	
3000 K	2500 lm	20°	19	1009783	
		40°	22	1009786	
		55°	22	1009789	
4000 K	2700 lm	20°	19	1009801	
		40°	22	1009804	
		55°	22	1009807	
2700 K	2400 lm	20°	19	1009766	
		40°	22	1009769	
		55°	22	1009772	
3000 K	2500 lm	20°	19	1009784	
		40°	22	1009787	
		55°	22	1009790	
4000 K	2700 lm	20°	19	1009802	
		40°	22	1009805	
		55°	22	1009808	


Configure further items and colours at ks-light.co.uk

DIFFUSERS

				
	Elliptical diffuser	**Prismatic diffuser**	**Frosted diffuser**	**Honeycomb diffuser**
		L		
Prod. no.	**1010690**	**1010688**	**1010689**	**1010687**
GBP	**5.00**	**6.00**	**6.00**	**16.00**

NUMINOS® XL
DL








700 mA
Power consumption: 24 W
Material: Aluminium/Plastic PC

- Material thickness of mounting surface: max. 25 mm
- Low-voltage plug
- Driver not included

Variant	GBP
All XL Versions	**113.00**

⊕


Product	Prod. no.	GBP
Decorative reflector		
gold	**1010133**	**10.00**
copper	**1010134**	**11.00**



● Black



● Black



○ White



● Black



○ White

Note:
Suitable drivers and reducer rings can be found on pages 50-55.

			UGR	Prod. no.	
2700 K	3500 lm	20°	19	1009918	
		40°	19	1009921	
		55°	22	1009924	
3000 K	3600 lm	20°	19	1009936	
		40°	19	1009939	
		55°	22	1009942	
4000 K	3800 lm	20°	19	1009954	
		40°	19	1009957	
		55°	22	1009960	
2700 K	3500 lm	20°	19	1009927	
		40°	19	1009930	
		55°	22	1009933	
3000 K	3600 lm	20°	19	1009945	
		40°	19	1009948	
		55°	22	1009951	
4000 K	3800 lm	20°	19	1009963	
		40°	19	1009966	
		55°	22	1009969	
2700 K	3500 lm	20°	19	1009928	
		40°	19	1009931	
		55°	22	1009934	
3000 K	3600 lm	20°	19	1009946	
		40°	19	1009949	
		55°	22	1009952	
4000 K	3800 lm	20°	19	1009964	
		40°	19	1009967	
		55°	22	1009970	


Configure further items and colours at ks-light.co.uk

DIFFUSERS

				
	Elliptical diffuser	**Prismatic diffuser**	**Frosted diffuser**	**Honeycomb diffuser**
		XL		
Prod. no.	**1010694**	**1010692**	**1010693**	**1010691**
GBP	**6.00**	**7.00**	**7.00**	**20.00**

NUMINOS® MOVE XS
DL










200 mA
Power consumption: 6.9 W
Material: Aluminium/Plastic PC

- Material thickness of mounting surface: max. 25 mm
- Low-voltage plug
- Driver not included

Variant	GBP
All XS Versions	**73.00**


Product	Prod. no.	GBP
Decorative reflector		
gold	**1010125**	**8.00**
copper	**1010126**	**8.00**



● Black



● Black



○ White



● Black



○ White

Note:
Leaf springs are included with the product and can be replaced.

Suitable drivers and reducer rings can be found on pages 50-55.

			UGR	Prod. no.	
2700 K	900 lm	20°	19	1009325	
		40°	22	1009328	
		55°	25	1009331	
3000 K	950 lm	20°	19	1009343	
		40°	22	1009346	
		55°	25	1009349	
4000 K	1000 lm	20°	19	1009361	
		40°	22	1009364	
		55°	25	1009367	
2700 K	900 lm	20°	19	1009334	
		40°	22	1009337	
		55°	25	1009340	
3000 K	950 lm	20°	19	1009352	
		40°	22	1009355	
		55°	25	1009358	
4000 K	1000 lm	20°	19	1009370	
		40°	22	1009373	
		55°	25	1009376	
2700 K	900 lm	20°	19	1009335	
		40°	22	1009338	
		55°	25	1009341	
3000 K	950 lm	20°	19	1009353	
		40°	22	1009356	
		55°	25	1009359	
4000 K	1000 lm	20°	19	1009371	
		40°	22	1009374	
		55°	25	1009377	


Configure further items and colours at ks-light.co.uk

DIFFUSERS

				
	Elliptical diffuser	Prismatic diffuser	Frosted diffuser	Honeycomb diffuser
	XS			
Prod. no.	1005612	1005613	1005614	1005615
GBP	5.00	5.00	5.00	8.00

NUMINOS® MOVE S
DL










200 mA
Power Consumption: 6.7 W
Material: Aluminium/Plastic PC

- Material thickness of mounting surface: max. 25 mm
- Low-voltage plug
- Driver not included

Variant	GBP
All S Versions	**79.00**


Product	Prod. no.	GBP
Decorative reflector		
gold	**1010127**	**8.00**
copper	**1010128**	**8.00**



● Black



● Black



○ White



● Black



○ White

Note:
Leaf springs are included with the product and can be replaced.

Suitable drivers and reducer rings can be found on pages 50-55.

			UGR	Prod. no.	
2700 K	1000 lm	20°	19	1009487	
		40°	19	1009490	
		55°	22	1009493	
3000 K	1050 lm	20°	19	1009505	
		40°	19	1009508	
		55°	22	1009511	
4000 K		20°	19	1009523	
		40°	19	1009526	
		55°	22	1009529	
2700 K	1000 lm	20°	19	1009496	
		40°	19	1009499	
		55°	22	1009502	
3000 K	1050 lm	20°	19	1009514	
		40°	19	1009517	
		55°	22	1009520	
4000 K		20°	19	1009532	
		40°	19	1009535	
		55°	22	1009538	
2700 K	1000 lm	20°	19	1009497	
		40°	19	1009500	
		55°	22	1009503	
3000 K	1050 lm	20°	19	1009515	
		40°	19	1009518	
		55°	22	1009521	
4000 K		20°	19	1009533	
		40°	19	1009536	
		55°	22	1009539	


Configure further items and colours at ks-light.co.uk

DIFFUSERS

				
	Elliptical diffuser	Prismatic diffuser	Frosted diffuser	Honeycomb diffuser
			S	
Prod. no.	1010682	1010680	1010681	1010679
GBP	5.00	5.00	5.00	8.00

NUMINOS® MOVE M
DL










350 mA
Power Consumption: 12 W
Material: Aluminium/Plastic PC

- Material thickness of mounting surface: max. 25 mm
- Low-voltage plug
- Driver not included

Variant	GBP
All M Versions	**88.00**


Product	Prod. no.	GBP
Decorative reflector		
gold	**1010129**	**10.00**
copper	**1010130**	**9.00**



● Black



● Black



○ White



● Black



○ White

Note:
Suitable drivers and reducer rings can be found on pages 50-55.

			UGR	Prod. no.	
2700 K	1700 lm	20°	19	1009649	
		40°	19	1009652	
		55°	22	1009655	
3000 K	1800 lm	20°	19	1009667	
		40°	19	1009670	
		55°	22	1009673	
4000 K	1900 lm	20°	19	1009685	
		40°	19	1009688	
		55°	22	1009691	
2700 K	1700 lm	20°	19	1009658	
		40°	19	1009661	
		55°	22	1009664	
3000 K	1800 lm	20°	19	1009676	
		40°	19	1009679	
		55°	22	1009682	
4000 K	1900 lm	20°	19	1009694	
		40°	19	1009697	
		55°	22	1009700	
2700 K	1700 lm	20°	19	1009659	
		40°	19	1009662	
		55°	22	1009665	
3000 K	1800 lm	20°	19	1009677	
		40°	19	1009680	
		55°	22	1009683	
4000 K	1900 lm	20°	19	1009695	
		40°	19	1009698	
		55°	22	1009701	


Configure further items and colours at ks-light.co.uk

DIFFUSERS

	Elliptical diffuser	Prismatic diffuser	Frosted diffuser	 Honeycomb diffuser
	M			
Prod. no.	1010686	1010684	1010685	1010683
GBP	5.00	6.00	6.00	12.00

NUMINOS® MOVE L
DL










500 mA
Power Consumption: 17 W
Material: Aluminium/Plastic PC

- Material thickness of mounting surface: max. 25 mm
- Low-voltage plug
- Driver not included

Variant	GBP
All L Versions	**105.00**

Product	Prod. no.	GBP
Decorative reflector		
gold	**1010131**	**10.00**
copper	**1010132**	**9.00**


Note:
Suitable drivers and reducer rings can be found on pages 50-55.



● Black



● Black



○ White



● Black



○ White

				Prod. no.	
2700 K	2400 lm	20°	19	1009810	
		40°	22	1009813	
		55°	22	1009816	
3000 K	2500 lm	20°	19	1009828	
		40°	22	1009831	
		55°	22	1009834	
4000 K	2700 lm	20°	19	1009846	
		40°	22	1009849	
		55°	22	1009852	
2700 K	2400 lm	20°	19	1009819	
		40°	22	1009822	
		55°	22	1009825	
3000 K	2500 lm	20°	19	1009837	
		40°	22	1009840	
		55°	22	1009843	
4000 K	2700 lm	20°	19	1009855	
		40°	22	1009858	
		55°	22	1009861	
2700 K	2400 lm	20°	19	1009820	
		40°	22	1009823	
		55°	22	1009826	
3000 K	2500 lm	20°	19	1009838	
		40°	22	1009841	
		55°	22	1009844	
4000 K	2700 lm	20°	19	1009856	
		40°	22	1009859	
		55°	22	1009862	


Configure further items and colours at ks-light.co.uk

DIFFUSERS

				
	Elliptic al diffuser	**Prismatic diffuser**	**Frosted diffuser**	**Honeycomb diffuser**
		L		
Prod. no.	**1010690**	**1010688**	**1010689**	**1010687**
GBP	**5.00**	**6.00**	**6.00**	**16.00**

NUMINOS® MOVE XL
DL










700 mA
Power Consumption: 24 W
Material: Aluminium/Plastic PC

- Material thickness of mounting surface: max. 25 mm
- Low-voltage plug
- Driver not included

Variant	GBP
All XL Versions	**134.00**


Product	Prod. no.	GBP
Decorative reflector		
gold	**1010133**	**10.00**
copper	**1010134**	**11.00**



● Black



● Black



○ White



● Black



○ White

Note:
Suitable drivers and reducer rings can be found on pages 50-55.

			UGR	Prod. no.	
2700 K	3500 lm	20°	19	1009972	
		40°	19	1009975	
		55°	22	1009978	
3000 K	3600 lm	20°	19	1009990	
		40°	19	1009993	
		55°	22	1009996	
4000 K	3800 lm	20°	19	1010008	
		40°	19	1010011	
		55°	22	1010014	
2700 K	3500 lm	20°	19	1009981	
		40°	19	1009984	
		55°	22	1009987	
3000 K	3600 lm	20°	19	1009999	
		40°	19	1010002	
		55°	22	1010005	
4000 K	3800 lm	20°	19	1010017	
		40°	19	1010020	
		55°	22	1010023	
2700 K	3500 lm	20°	19	1009982	
		40°	19	1009985	
		55°	22	1009988	
3000 K	3600 lm	20°	19	1010000	
		40°	19	1010003	
		55°	22	1010006	
4000 K	3800 lm	20°	19	1010018	
		40°	19	1010021	
		55°	22	1010024	


Configure further items and colours at ks-light.co.uk

DIFFUSERS

				
	Elliptical diffuser	**Prismatic diffuser**	**Frosted diffuser**	**Honeycomb diffuser**
		XL		
Prod. no.	**1010694**	**1010692**	**1010693**	**1010691**
GBP	**6.00**	**7.00**	**7.00**	**20.00**

NUMINOS® GIMBLE XS
DL










200 mA
Power Consumption: 6 W
Material: Aluminium/Plastic PC

- Material thickness of mounting surface: max. 25 mm
- Low-voltage plug
- Driver not included

Variant	GBP
All XS Versions	**80.00**


Product	Prod. no.	GBP
Decorative reflector		
● gold	**1010125**	**8.00**
● copper	**1010126**	**8.00**



● Black



● Black



○ White



● Black



○ White

Note:
Leaf springs are included with the product and can be replaced.

Suitable drivers and reducer rings can be found on pages 50-55.

			UGR	Prod. no.	
2700 K	900 lm	20°	19	**1010026**	
		40°	22	**1010029**	
		55°	25	**1010032**	
3000 K	950 lm	20°	19	**1010044**	
		40°	22	**1010047**	
		55°	25	**1010050**	
4000 K	1000 lm	20°	19	**1010062**	
		40°	22	**1010065**	
		55°	25	**1010068**	
2700 K	900 lm	20°	19	**1010035**	
		40°	22	**1010038**	
		55°	25	**1010041**	
3000 K	950 lm	20°	19	**1010053**	
		40°	22	**1010056**	
		55°	25	**1010059**	
4000 K	1000 lm	20°	19	**1010071**	
		40°	22	**1010074**	
		55°	25	**1010077**	
2700 K	900 lm	20°	19	**1010036**	
		40°	22	**1010039**	
		55°	25	**1010042**	
3000 K	950 lm	20°	19	**1010054**	
		40°	22	**1010057**	
		55°	25	**1010060**	
4000 K	1000 lm	20°	19	**1010072**	
		40°	22	**1010075**	
		55°	25	**1010078**	


Configure further items and colours at ks-light.co.uk

DIFFUSERS

				
	Elliptical diffuser	**Prismatic diffuser**	**Frosted diffuser**	**Honeycomb diffuser**
		XS		
Prod. no.	**1005612**	**1005613**	**1005614**	**1005615**
GBP	**5.00**	**5.00**	**5.00**	**8.00**

NUMINOS® GIMBLE S
DL










200 mA
Power Consumption: 6.7 W
Material: Aluminium/Plastic PC

- Material thickness of mounting surface: max. 25 mm
- Low-voltage plug
- Driver not included

Variant	GBP
All S Versions	**92.00**


Product	Prod. no.	GBP
Decorative reflector		
gold	**1010127**	**8.00**
copper	**1010128**	**8.00**



● Black



● Black



○ White



● Black



○ White

Note:
Leaf springs are included with the product and can be replaced.

Suitable drivers and reducer rings can be found on pages 50-55.

			UGR	Prod. no.	
2700 K	1000 lm	20°	19	1009379	
		40°	19	1009382	
		55°	22	1009385	
3000 K	1050 lm	20°	19	1009397	
		40°	19	1009400	
		55°	22	1009403	
4000 K		20°	19	1009415	
		40°	19	1009418	
		55°	22	1009421	
2700 K	1000 lm	20°	19	1009388	
		40°	19	1009391	
		55°	22	1009394	
3000 K	1050 lm	20°	19	1009406	
		40°	19	1009409	
		55°	22	1009412	
4000 K		20°	19	1009424	
		40°	19	1009427	
		55°	22	1009430	
2700 K	1000 lm	20°	19	1009389	
		40°	19	1009392	
		55°	22	1009395	
3000 K	1050 lm	20°	19	1009407	
		40°	19	1009410	
		55°	22	1009413	
4000 K		20°	19	1009425	
		40°	19	1009428	
		55°	22	1009431	


Configure further items and colours at ks-light.co.uk

DIFFUSERS

				
	Elliptical diffuser	Prismatic diffuser	Frosted diffuser	Honeycomb diffuser
			S	
Prod. no.	1010682	1010680	1010681	1010679
GBP	5.00	5.00	5.00	8.00

NUMINOS® GIMBLE M
DL










350 mA
Power Consumption: 12 W
Material: Aluminium/Plastic PC

- Material thickness of mounting surface: max. 25 mm
- Low-voltage plug
- Driver not included

Variant	GBP
All M Versions	**100.00**


Product	Prod. no.	GBP
Decorative reflector		
gold	**1010129**	**10.00**
copper	**1010130**	**9.00**



● Black



● Black



○ White



● Black



○ White

Note:
Suitable drivers and reducer rings can be found on pages 50-55.

			UGR	Prod. no.	
2700 K	1700 lm	20°	19	1009541	
		40°	19	1009544	
		55°	22	1009547	
3000 K	1800 lm	20°	19	1009559	
		40°	19	1009562	
		55°	22	1009565	
4000 K	1900 lm	20°	19	1009577	
		40°	19	1009580	
		55°	22	1009583	
2700 K	1700 lm	20°	19	1009550	
		40°	19	1009553	
		55°	22	1009556	
3000 K	1800 lm	20°	19	1009568	
		40°	19	1009571	
		55°	22	1009574	
4000 K	1900 lm	20°	19	1009586	
		40°	19	1009589	
		55°	22	1009592	
2700 K	1700 lm	20°	19	1009551	
		40°	19	1009554	
		55°	22	1009557	
3000 K	1800 lm	20°	19	1009569	
		40°	19	1009572	
		55°	22	1009575	
4000 K	1900 lm	20°	19	1009587	
		40°	19	1009590	
		55°	22	1009593	


Configure further items and colours at ks-light.co.uk

DIFFUSERS

	Elliptical diffuser	Prismatic diffuser	Frosted diffuser	 Honeycomb diffuser
	M			
Prod. no.	1010686	1010684	1010685	1010683
GBP	5.00	6.00	6.00	12.00

NUMINOS® GIMBLE L
DL










500 mA
Power Consumption: 17 W
Material: Aluminium/Plastic PC

- Material thickness of mounting surface: max. 25 mm
- Low-voltage plug
- Driver not included

Variant	GBP
All L Versions	**117.00**


Product	Prod. no.	GBP
Decorative reflector		
gold	**1010131**	**10.00**
copper	**1010132**	**9.00**



● Black



● Black



○ White



● Black



○ White

Note:
Suitable drivers and reducer rings can be found on pages 50-55.

			UGR	Prod. no.	
2700 K	2400 lm	20°	19	1009703	
		40°	22	1009706	
		55°	22	1009709	
3000 K	2500 lm	20°	19	1009721	
		40°	22	1009724	
		55°	22	1009727	
4000 K	2700 lm	20°	19	1009739	
		40°	22	1009742	
		55°	22	1009745	
2700 K	2400 lm	20°	19	1009712	
		40°	22	1009715	
		55°	22	1009718	
3000 K	2500 lm	20°	19	1009730	
		40°	22	1009733	
		55°	22	1009736	
4000 K	2700 lm	20°	19	1009748	
		40°	22	1009751	
		55°	22	1009754	
2700 K	2400 lm	20°	19	1009713	
		40°	22	1009716	
		55°	22	1009719	
3000 K	2500 lm	20°	19	1009731	
		40°	22	1009734	
		55°	22	1009737	
4000 K	2700 lm	20°	19	1009749	
		40°	22	1009752	
		55°	22	1009755	


Configure further items and colours at ks-light.co.uk

DIFFUSERS

				
	Elliptical diffuser	Prismatic diffuser	Frosted diffuser	Honeycomb diffuser
		L		
Prod. no.	1010690	1010688	1010689	1010687
GBP	5.00	6.00	6.00	16.00

NUMINOS® GIMBLE XL
DL










700 mA
Power consumption: 24 W
Material: Aluminium/Plastic PC

- Material thickness of mounting surface: max. 25 mm
- Low-voltage plug
- Driver not included

Variant	GBP
All XL Versions	**134.00**


Product	Prod. no.	GBP
Decorative reflector		
gold	**1010133**	**10.00**
copper	**1010134**	**11.00**



● Black



● Black



○ White



● Black



○ White

Note:
Suitable drivers and reducer rings can be found on pages 50-55.

			UGR	Prod. no.	
2700 K	3500 lm	20°	19	1009864	
		40°	19	1009867	
		55°	22	1009870	
3000 K	3600 lm	20°	19	1009882	
		40°	19	1009885	
		55°	22	1009888	
4000 K	3800 lm	20°	19	1009900	
		40°	19	1009903	
		55°	22	1009906	
2700 K	3500 lm	20°	19	1009873	
		40°	19	1009876	
		55°	22	1009879	
3000 K	3600 lm	20°	19	1009891	
		40°	19	1009894	
		55°	22	1009897	
4000 K	3800 lm	20°	19	1009909	
		40°	19	1009912	
		55°	22	1009915	
2700 K	3500 lm	20°	19	1009874	
		40°	19	1009877	
		55°	22	1009880	
3000 K	3600 lm	20°	19	1009892	
		40°	19	1009895	
		55°	22	1009898	
4000 K	3800 lm	20°	19	1009910	
		40°	19	1009913	
		55°	22	1009916	

Configure further items and colours at ks-light.co.uk

DIFFUSOREN

				
	Elliptical diffuser	**Prismatic diffuser**	**Frosted diffuser**	**Honeycomb diffuser**
		XL		
Prod. no.	**1010694**	**1010692**	**1010693**	**1010691**
GBP	**6.00**	**7.00**	**7.00**	**20.00**

Driver assignment XS, S

			
	LED DRIVER 21W | 200mA	LED DRIVER 10W | 200mA dimmable	LED DRIVER 23W | 200mA DALI dimmable
	XS S		
	IP20		
Material	Polycarbonate (PC)		
Colour	White		
Prim. voltage	220-240 V ~50/60 Hz		
Sec. voltage	15-45V DC	26-38V DC	2.5-46V DC
Output Current	200mA		
Number of sec. outputs	1		
Output from	3 W	4.7 W	0.5 W
Output up to	9 W	7.6 W	9.2 W
Ambient temp. min	-20°C	-25°C	-20°C
Ambient temp. max.	45°C	50°C	
Thermal protection	110°C		
IP protection class	IP20		
Dimmable	–	PHASE C	DALI
Length	13.8 cm	12.2 cm	13.9 cm
Width	4.4 cm	4.1cm	3 cm
Height	2.3 cm	2.3 cm	2.1 cm
Prod. no.	**1010695**	**1010699**	**1010703**
GBP	**22.00**	**26.00**	**57.00**

Driver assignment M

		
LED DRIVER 21W | 350mA	LED DRIVER 20W | 350mA dimmable	LED DRIVER 23W | 350mA DALI dimmable
	M	
	IP20	

Material	Polycarbonate (PC)		
Colour	White		
Prim. voltage	220-240 V ~50/60 Hz		
Sec. voltage	15-45V DC	26-38V DC	2.5-46V DC
Output current	350mA		
Number of sec. outputs	1		
Output from	5.3 W	9.1 W	0.87 W
Output up to	15.8 W	13.3 W	16.1 W
Ambient temp. min	-20°C	-25°C	-20°C
Ambient temp. max.	45°C	50°C	
Thermal protection	110°C		
IP protection class	IP20		
Dimmable	–	PHASE C	DALI
Length	19.2 cm	13.8 cm	21 cm
Width	5.9 cm	4 cm	5.7 cm
Height	2.3 cm	3 cm	2.1 cm
Prod. no.	**1010696**	**1010700**	**1010704**
GBP	**22.00**	**31.00**	**57.00**

Driver Assignment L

		
LED DRIVER 21W | 500mA	LED DRIVER 20W | 500mA dimmable	LED DRIVER 36W | 500mA DALI dimmable
	L	
	IP20	

Material	Polycarbonate (PC)		
Colour	White		
Prim. voltage	220-240 V ~50/60 Hz		
Sec. voltage	15-45V DC	26-38V DC	2.5-50V DC
Output current	700 mA	500 mA	250/350/500/700mA
Number of sec. outputs	1		
Output from	7.5 W	9.1 W	1.25 W
Output up to	22.5 W	19 W	25 W
Ambient temp. min	-20°C	-25°C	-20°C
Ambient temp. max.	45°C	50°C	
Thermal protection	110°C		
IP protection class	IP20		
Dimmable	–	PHASE C	DALI
Length	19.2 cm	13.8 cm	24 cm
Width	5.9 cm	4 cm	5.7 cm
Height	2.3 cm	3 cm	2.1 cm
Prod. no.	**1010697**	**1010701**	**1010705**
GBP	**22.00**	**31.00**	**61.00**

Driver Assignment XL

		
LED DRIVER 30W | 700mA	LED DRIVER 30W | 700mA dimmable	LED DRIVER 30W | 700mA DALI dimmable
	XL	
	IP20	

Material	Polycarbonate (PC)		
Colour	White		
Prim. voltage	220-240 V ~50/60 Hz		
Sec. voltage	27-45V DC	26-42V DC	2.5-50V DC
Output current	1050 mA	700 mA	1050 mA
Number of sec. outputs	1		
Output from	18.9 W	18.2 W	1.75 W
Output up to	31.5 W	29.4 W	35 W
Ambient temp. min	-25°C	-20°C	-25°C
Ambient temp. max.	45°C		50°C
Thermal protection	110°C		
IP protection class	IP20		
Dimmable	–	PHASE C	DALI
Length	19.2 cm	13.8 cm	24 cm
Width	5.9 cm	4 cm	5.7 cm
Height	2.3 cm	3 cm	2.1 cm
Prod. no.	**1010698**	**1010702**	**1010706**
GBP	**24.00**	**35.00**	**61.00**



Reducer ring, round



Material	steel	steel	steel	steel	steel
External Ø	16 cm	16 cm	24 cm	24 cm	24 cm
Height	5.3 cm	5.3 cm	5.3 cm	5.3 cm	5.3 cm
Internal Ø	7 cm	10 cm	12 cm	15 cm	18 cm
Ceiling cut-out	8.5-13 cm	12 -15 cm	14 -18 cm	17- 20 cm	20 - 22 cm
Material thickness	3 cm	3 cm	3 cm	3 cm	3 cm
Prod. no. black	**1006135**	**1006139**	**1006143**	**1006147**	**1006151**
Prod. no. white	**1006136**	**1006140**	**1006144**	**1006148**	**1006152**
GBP	**16.00**	**14.00**	**17.00**	**16.00**	**16.00**

Reducer ring, square



Material	Steel	Steel	Steel	Steel	Steel
Length	16 cm	16 cm	24 cm	24 cm	24 cm
Width	16 cm	16 cm	24 cm	24 cm	24 cm
Height	5.3 cm	5.3 cm	5.3 cm	5.3 cm	5.3 cm
Internal Ø	7 cm	10 cm	12 cm	15 cm	18 cm
Ceiling cut-out	8.5-13 cm	12 -15 cm	14 -18 cm	17- 20 cm	20 - 22 cm
Material thickness	3 cm	3 cm	3 cm	3 cm	3 cm
Prod. no. black	**1006137**	**1006141**	**1006145**	**1006149**	**1006153**
Prod. no. white	**1006138**	**1006142**	**1006146**	**1006150**	**1006154**
GBP	**16.00**	**14.00**	**17.00**	**16.00**	**16.00**


CONFIGURE YOUR NUMINOS®

SELECT YOUR SYSTEM COLOUR

NUMINOS® DL

NUMINOS® MOVE

NUMINOS® GIMBLE




Black
- Black
- White
- Chrome

White
- Black
- White
- Chrome

NUMINOS® PD

NUMINOS® CL


NUMINOS® SPOT



Black White

NUMINOS® TRACK

NUMINOS® ZOOM



Black White

The NUMINOS® lighting system delivers consistent lighting performance and a contemporary design across all applications – from hotels and offices to commercial and residential spaces. From application and technology through to the finest design details, the modular downlights and spotlights can be configured precisely to meet the requirements of your project and the conditions of the space. Thanks to consistent lighting quality throughout the system, all NUMINOS variants can be seamlessly combined within a project, regardless of the installation type. The more complex your project, the more you will benefit from the NUMINOS® lighting system.

Discover NUMINOS® Lights also suitable for the 48V system pp. 442–449

SIZE

XS S M L XL

S M L XL

S M L XL

NUMINOS® Zoom only available in size M

PERFORMANCE

XS 200mA Power Consumption: 7 W

S 200mA Power Consumption: 7 W

M 350mA Power Consumption: 12 W

L 500mA Power Consumption: 17 W

XL 700mA Power Consumption: 24 W

S 200mA Power Consumption: 11W

M 350mA Power Consumption: 20W

L 500mA Power Consumption: 28W

XL 700mA Power Consumption: 36W

DIFFUSERS

ELLIPTICAL

Vertically distributed light, reduced glare, perfect for use in corridors

PRISMATIC

Wide beam, reduced glare, ideal for lights at specific distances

FROSTED

Wide beam, superior illumination, perfect for low ceilings


HONEYCOMB

Narrow beam, reduced glare, perfect for computer work



DYSKO
DL, ROUND, PHASE







220-240 V ~50/60 Hz | 150 mA
Total Wattage: 6.4 W
Material: Aluminium

- Including external LED driver




2700 K
750 lm

Variant	Prod. no.	GBP
black	1010355	121.00
black/gold	1010353	118.00
white/black	1010354	118.00

DYSKO
PD, PHASE







220-240 V ~50/60 Hz | 100 mA
Total Wattage: 4.4 W
Material: Aluminium

- Including external LED driver




2700 K
500 lm

Variant	Prod. no.	GBP
black/gold	1010359	127.00
white/black	1010360	127.00


NEW TRIA® 68
DL, PHASE



1



2



1



● Black




○ White

2



● Black



○ White



220-240V ~50/60Hz | 200mA
Total Wattage: 8.3W
Material: Aluminium

- Material thickness of mounting surface: max. 20 mm






IP				Prod. no.	GBP	
IP 20	2700 K	705 lm	38°	**1007386**	**47.00**	
	2700 K	705 lm	60°	**1007388**	**47.00**	
	3000 K	750 lm	38°	**1007390**	**47.00**	
	3000 K	750 lm	60°	**1007392**	**47.00**	
IP 20	2700 K	705 lm	38°	**1007385**	**47.00**	
	2700 K	705 lm	60°	**1007387**	**47.00**	
	3000 K	750 lm	38°	**1007389**	**47.00**	
	3000 K	750 lm	60°	**1007391**	**47.00**	
IP 20	2700 K	705 lm	38°	**1007394**	**47.00**	
	2700 K	705 lm	60°	**1007396**	**47.00**	
	3000 K	750 lm	38°	**1007398**	**47.00**	
	3000 K	750 lm	60°	**1007400**	**47.00**	
IP 20	2700 K	705 lm	38°	**1007393**	**47.00**	
	2700 K	705 lm	60°	**1007395**	**47.00**	
	3000 K	750 lm	38°	**1007397**	**47.00**	
	3000 K	750 lm	60°	**1007399**	**47.00**	

NEW TRIA® 68
DL, PHASE





C,L 50.000h L80B10 INSIDE CRI 90

220-240V ~50/60Hz | 200mA
Total Wattage: 8.3 W
Material: Aluminium

- Material thickness of mounting surface: max. 20 mm




● Black



○ White

NEW TRIA® 75
DL, ROUND, PHASE





C,L IP20 30° 50.000h L80B10 INSIDE CRI 90

220-240V ~50/60Hz | 200mA
Total Wattage: 8.3W
Material: Aluminium

- Material thickness of mounting surface: max. 20 mm




● Black



○ White

IP		lm		Prod. no.	GBP	
IP 20/ IP 65*	2700 K	460 lm	38°	**1007406**	**60.00**	
	3000 K	500 lm	38°	**1007408**	**59.00**	
IP 20/ IP 65*	2700 K	530 lm	38°	**1007405**	**60.00**	
	3000 K	570 lm	38°	**1007407**	**60.00**	

*IP65 room side

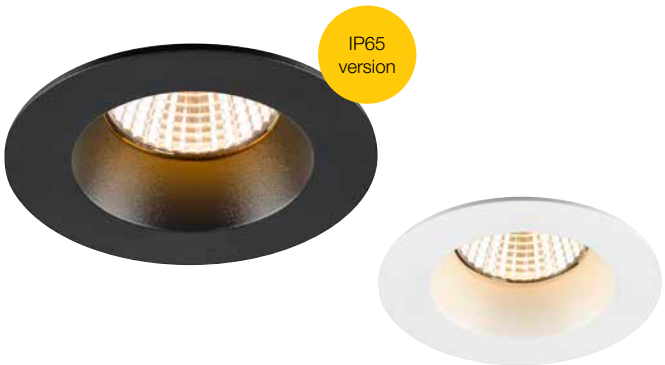

IP		lm		Prod. no.	GBP	
IP 20	2700 K	705 lm	38°	**1007402**	**55.00**	
	3000 K	750 lm	38°	**1007404**	**55.00**	
IP 20	2700 K	705 lm	38°	**1007401**	**55.00**	
	3000 K	750 lm	38°	**1007403**	**55.00**	




NEW TRIA® 68
DL, DTW, PHASE


DIM TO WARM



1



2



C,L | IP20 | 30° | 50.000h L80B10 | LED INSIDE | CRI 90

220-240V ~50/60Hz | 250mA
Total Wattage: 11W
Material: Aluminium

- Material thickness of mounting surface: max. 20 mm

1



● Black




○ White

2



● Black




○ White





					Prod. no.	GBP	
	IP 20	1800 K – 3000 K	70 lm – 700 lm	38°	**1007424**	**60.00**	
				60°	**1007426**	**60.00**	
	IP 20	1800 K – 3000 K	70 lm – 700 lm	38°	**1007423**	**60.00**	
				60°	**1007425**	**60.00**	
	IP 20	1800 K – 3000 K	70 lm – 700 lm	38°	**1007428**	**60.00**	
				60°	**1007430**	**60.00**	
	IP 20	1800 K – 3000 K	70 lm – 700 lm	38°	**1007427**	**60.00**	
				60°	**1007429**	**60.00**	

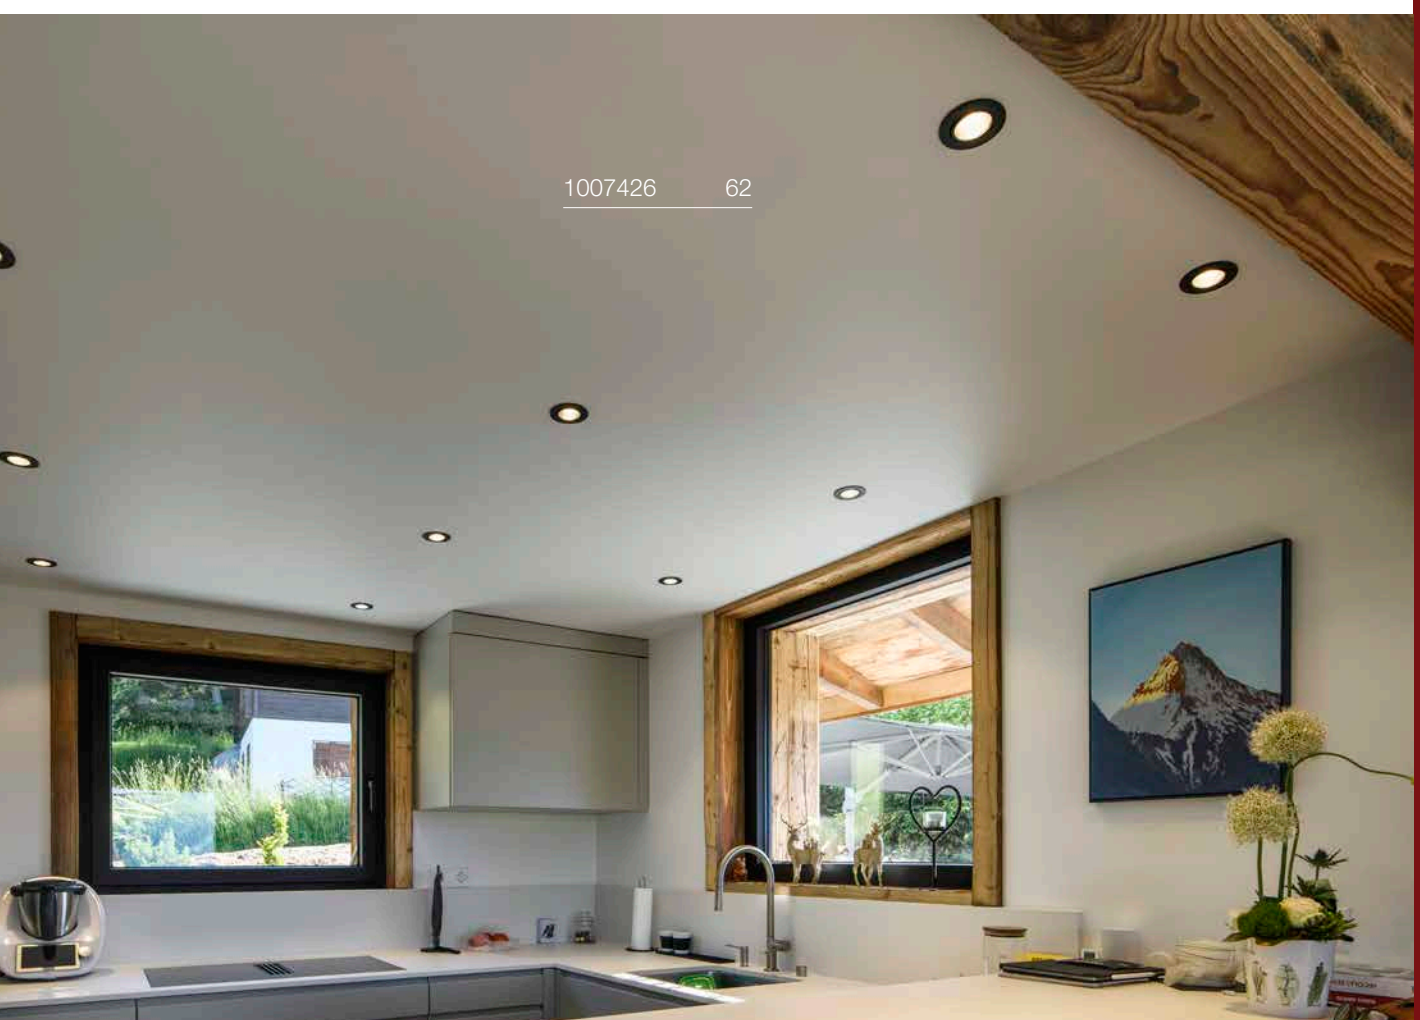


NEW TRIA®
UNIVERSAL 68
DL, PHASE


CCT




1



2



3



C.L IP20 50.000h L80B10 LED INSIDE

220-240V ~50/60Hz | 100-180mA
Total Wattage: 8.6W
Material: Aluminium

- Material thickness of mounting surface: max. 20 mm

1



● Black




○ White

2



● Black



○ White

3



● Black



○ White









	IP				Prod. no.	GBP	
30°	IP 20	2500 K 3000 K 4000 K	540 lm 600 lm 600 lm	38°	**1007434**	**77.00**	
				60°	**1007436**	**77.00**	
30°	IP 20	2500 K 3000 K 4000 K	540 lm 600 lm 600 lm	38°	**1007433**	**77.00**	
				60°	**1007435**	**77.00**	
30°	IP 20	2500 K 3000 K 4000 K	540 lm 600 lm 600 lm	38°	**1007438**	**77.00**	
				60°	**1007440**	**77.00**	
30°	IP 20	2500 K 3000 K 4000 K	540 lm 600 lm 600 lm	38°	**1007437**	**77.00**	
				60°	**1007439**	**77.00**	
–	IP 20 IP 65*	2500 K 3000 K 4000 K	370 lm 410 lm 410 lm	38°	**1007442**	**85.00**	
–	IP 20 IP 65*	2500 K 3000 K 4000 K	370 lm 410 lm 410 lm	38°	**1007441**	**85.00**	

*IP65 room side

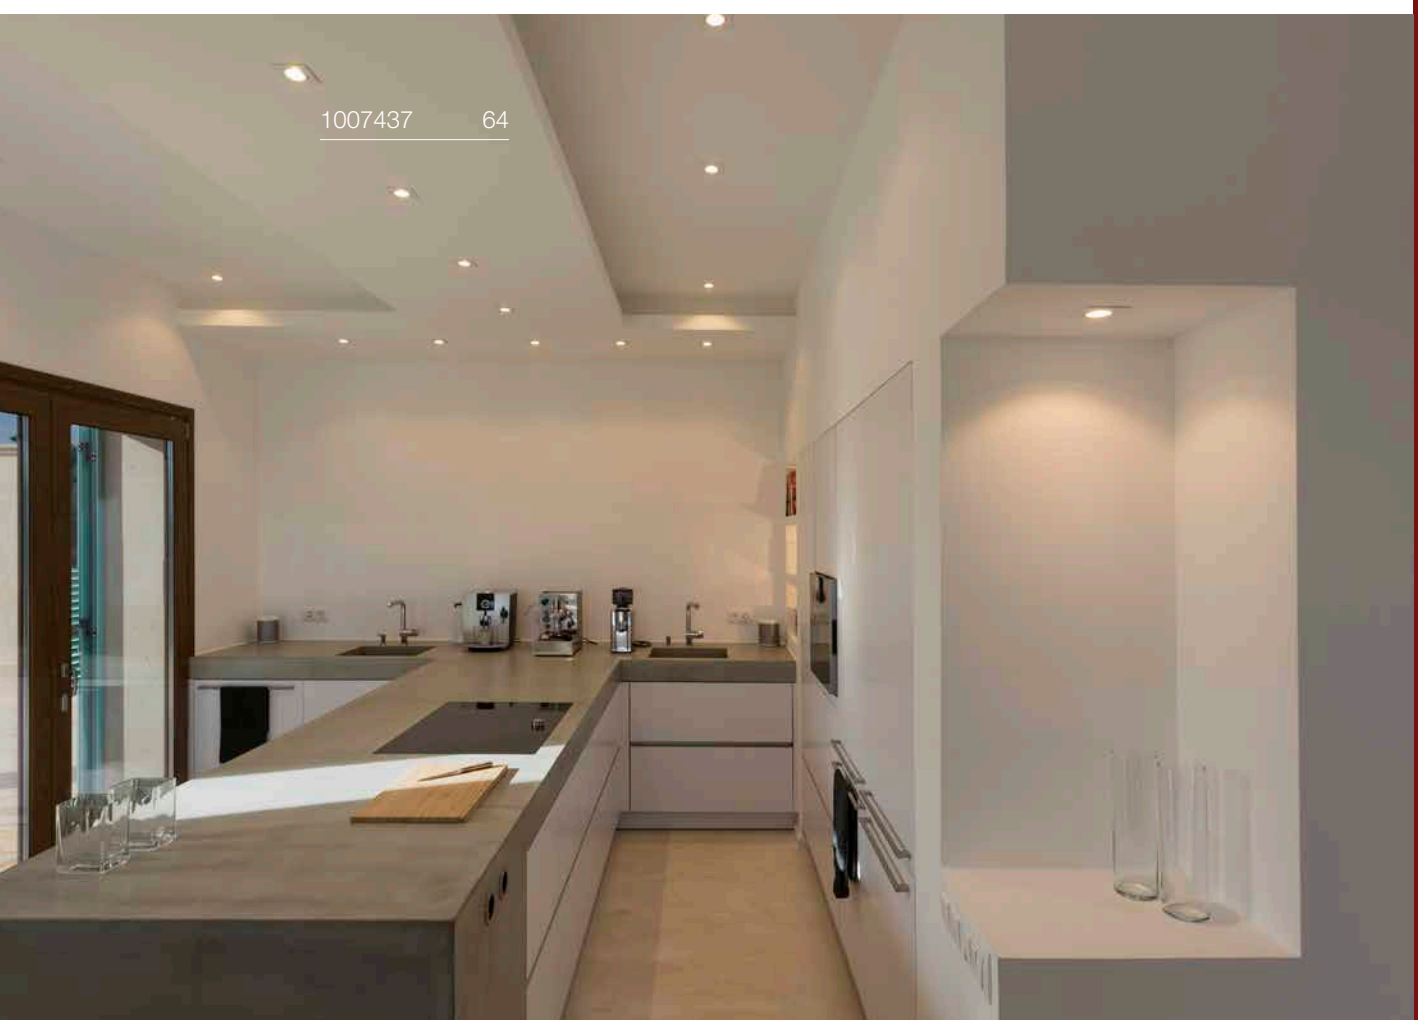

NEW TRIA® 68
DL, PHASE, AIRTIGHT





C,L | IP20/IP23 | IK02 | 20° | L80B10 | UGR 22 | LED INSIDE | CRI 90

220-240 V ~50/60 Hz | 180 mA
Total Wattage: 7.5 W
Material: Aluminium/PC


• Meets the requirements of RE2020



● Black




○ White

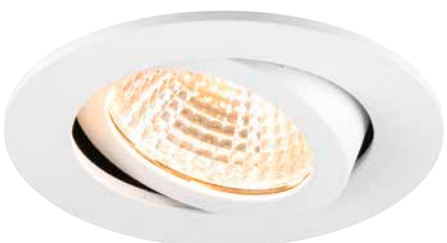



						Prod. no.	GBP	
20°	IP20/IP23	2700 K	591 lm	36°	22	**1009021**	**46.00**	
		3000 K	621 lm			**1009023**	**46.00**	
20°	IP20/IP23	2700 K	591 lm	36°	22	**1009020**	**46.00**	
		3000 K	621 lm			**1009022**	**46.00**	

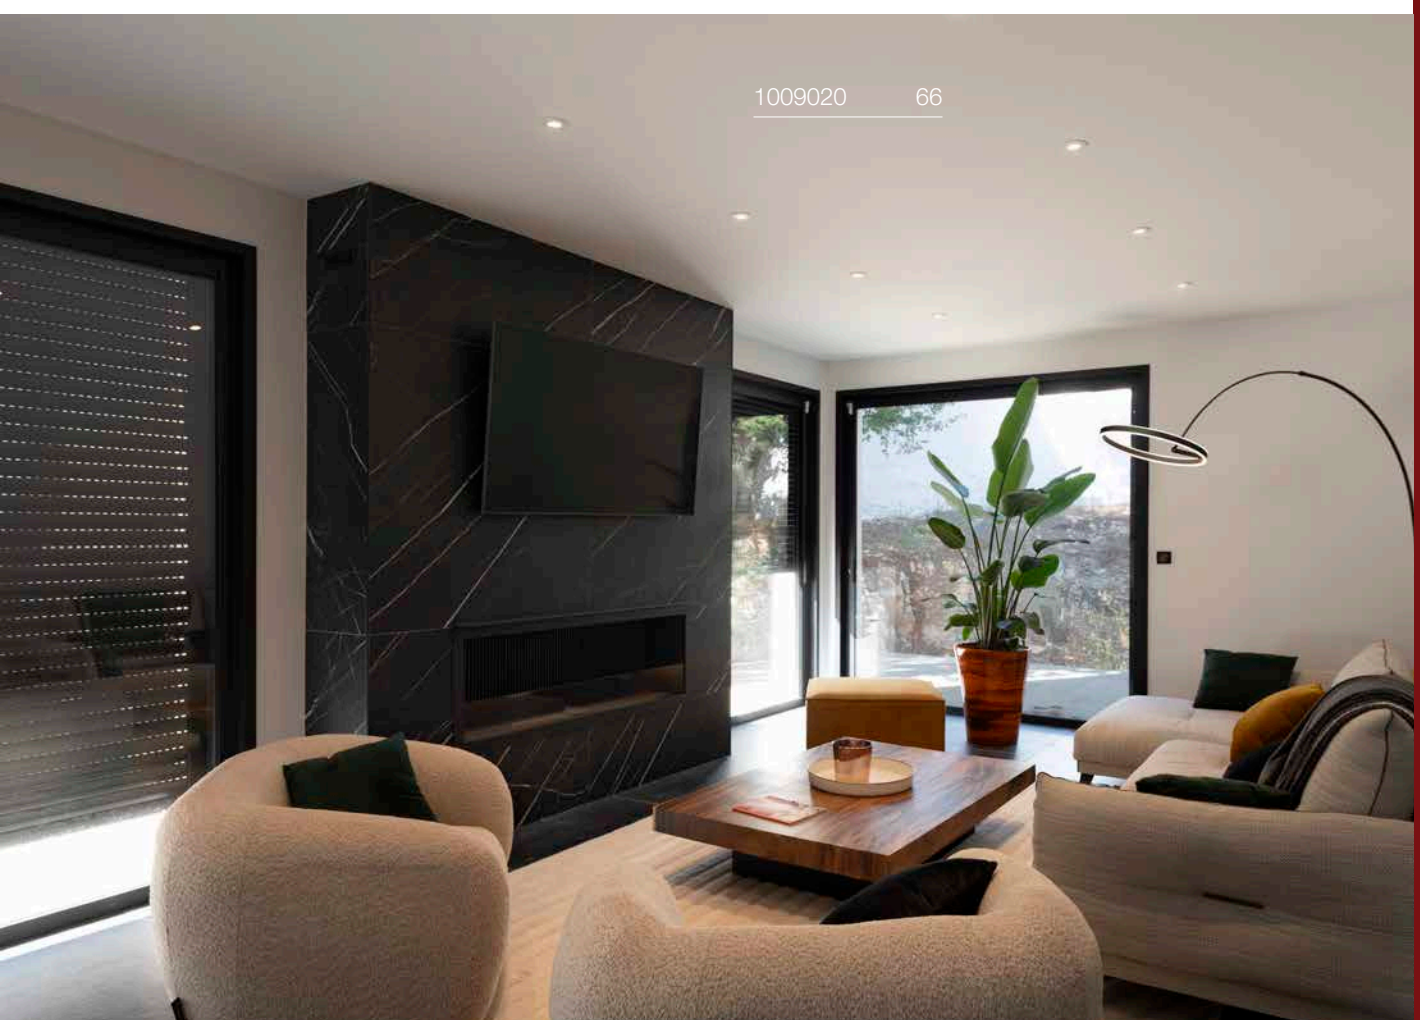

NEW TRIA® 68
DL, QPAR51



1



- Black



- White




- Aluminium

2



- Black




- White




- Aluminium

1



2





220-240V ~50/60Hz
Material: Aluminium

- Material thickness of mounting surface: max. 20 mm

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F



Prod. no.: **1005077** **7.00 GBP**








	IP		Prod. no.	GBP	
	IP 20	Base: 1xGU10	**1007369**	**18.00**	
	IP 20	Base: 1xGU10	**1007368**	**18.00**	
	IP 20	Base: 1xGU10	**1007370**	**23.00**	
	IP 20	Base: 1xGU10	**1007372**	**18.00**	
	IP 20	Base: 1xGU10	**1007371**	**18.00**	
	IP 20	Base: 1xGU10	**1007373**	**23.00**	




NEW TRIA® 75 / XL
DL, QPAR51




1




2



3



4




1



- Black
- White
- Aluminium

2



- Black
- White
- Aluminium

3



- Black, XL
- White, XL
- Aluminium, XL

4



- Black, XL
- White, XL
- Aluminium, XL



220-240V ~50/60Hz
Material: Aluminium

- Material thickness of mounting surface: max. 20 mm

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

C,L

Prod. no.: **1005077** **7.00 GBP**

IP		Prod. no.	GBP	
IP 20	Base: 1xGU10	**1007375**	**23.00**	
IP 20	Base: 1xGU10	**1007374**	**23.00**	
IP 20	Base: 1xGU10	**1007376**	**26.00**	
IP 20	Base: 1xGU10	**1007378**	**23.00**	
IP 20	Base: 1xGU10	**1007377**	**23.00**	
IP 20	Base: 1xGU10	**1007379**	**26.00**	

IP 20	Base: 1xGU10	**1007625**	**27.00**	
IP 20	Base: 1xGU10	**1007624**	**27.00**	
IP 20	Base: 1xGU10	**1007626**	**30.00**	
IP 20	Base: 1xGU10	**1007628**	**27.00**	
IP 20	Base: 1xGU10	**1007627**	**27.00**	
IP 20	Base: 1xGU10	**1007629**	**30.00**	










NEW TRIA® 45
DL, ROUND



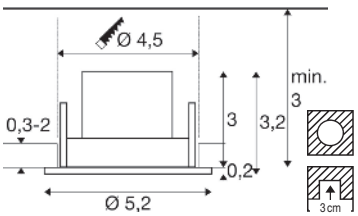

IP20/ IP44 · IK02 · 24° · 25° · 50000 h L80B10 · UGR 22

220-240 V ~50/60 Hz | 350 mA
Total Wattage: 4 W

• Including external LED driver


LED INSIDE · CRI 90

1009002 **1009003**	Down	2700 K 360 lm	
1009004 **1009005**	Down	3000 K 360 lm	

Variant	Prod. no.	GBP
● black 2700 K	**1009003**	**43.00**
● black 3000 K	**1009005**	**43.00**
○ white 2700 K	**1009002**	**43.00**
○ white 3000 K	**1009004**	**43.00**

NEW TRIA® 155
DL, DOUBLE, QPAR51



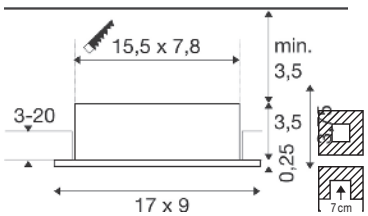

IP20 · 30°

220-240 V ~50/60 Hz
Material: Aluminium

SOCKET INSIDE · 10 W

Base: 2xGU10

Variant	Prod. no.	GBP
● black	**1008510**	**42.00**
○ white	**1008509**	**42.00**

GU10 | 6 W | 38°
470 lm | 3000 K | EEC = F

C,L

Prod. no.: **1005079** **7.00 GBP**


SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: **1012469** **23.00 GBP**

NEW TRIA® 155
DL, DOUBLE



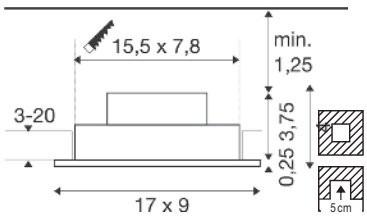

C,L · IP20 · 38° · 30° · 50000 h L80B10

220-240 V ~50/60 Hz | 350 mA
Total Wattage: 13.6 W
Material: Aluminium

LED INSIDE · CRI 90

1008511 **1008512**	Down	2700 K 1220 lm	
1008513 **1008514**	Down	3000 K 1280 lm	

Variant	Prod. no.	GBP
● black 2700 K	**1008512**	**96.00**
● black 3000 K	**1008514**	**96.00**
○ white 2700 K	**1008511**	**96.00**
○ white 3000 K	**1008513**	**96.00**


COMBINE OTHER ITEMS FROM THE FOLLOWING PAGES






GU10 base or LED module

+

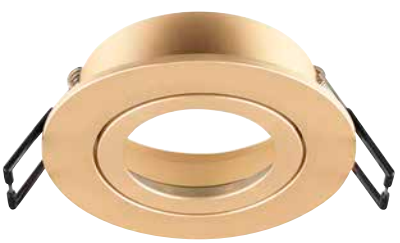



Mounting ring available in black, white, pink gold and aluminium

=

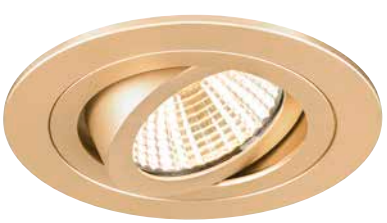

GU10
LED CONNECTION BOX
WITH BASE, MAX. 10W





IP20

220-240 V ~50/60 Hz
Material: Plastic

SOCKET INSIDE 10 W

Base: 1xGU10

Variant	Prod. no.	GBP
● black	**1007283**	**6.00**


GU10 | 6 W | 38°
470 lm | 3000 K | EEC = F

C,L

Prod. no.: **1005080** **7.00 GBP**

NEW TRIA®
DL, LED MODULE, PHASE





C,L IP20 50000h L80B10

220-240 V ~50/60 Hz | 200 mA
Total Wattage: 8.3 W
Material: Aluminium

LED INSIDE CRI 90


	2700 K
1007381	705 lm
1007382	

	3000 K
1007383	750 lm
1007384	

Variant	Prod. no.	GBP
● black 2700 K | 38°	**1007381**	**39.00**
● black 2700 K | 60°	**1007382**	**39.00**
● black 3000 K | 38°	**1007383**	**39.00**
● black 3000 K | 60°	**1007384**	**39.00**

NEW TRIA®
DL, LED MODULE, DTW, PHASE





C,L IP20 50000h L80B10

220-240 V ~50/60 Hz | 250 mA
Total Wattage: 11 W
Material: Aluminium


LED INSIDE DIM TO WARM CRI 90

	1800 K	3000 K
1007421	70 lm	700 lm
1007422		

Variant	Prod. no.	GBP
● black 38°	**1007421**	**49.00**
● black 60°	**1007422**	**49.00**

NEW TRIA® UNIVERSAL
DL, LED MODULE, PHASE





C,L IP20 50000h L80B10

220-240 V ~50/60 Hz | 100 - 180 mA
Total Wattage: 8.6 W
Material: Aluminium

LED INSIDE DIM TO WARM CRI 90

	2500 K	3000 K	4000 K
1007431	540 lm	600 lm	600 lm
1007432			

Variant	Prod. no.	GBP
● black 38°	**1007431**	**66.00**
● black 60°	**1007432**	**66.00**



NEW TRIA® 68
RING, ROUND, GU10/LED MODULES



IP20

Ø: 8.2 cm
H: 2.6 cm
Material: Aluminium

- Installation Diameter: 68 mm
- Material thickness of mounting surface: max. 20 mm

Variant	Prod. no.	GBP
● black	**1007332**	**13.00**
○ white	**1007333**	**13.00**
● aluminium	**1007335**	**18.00**
● Pink gold	**1007334**	**22.00**

NEW TRIA® 68
RING, SQUARE, GU10/LED MODULES



IP20

L: 8.2 cm
W: 8.20 cm
H: 2.6 cm
Material: Aluminium

- Installation Diameter: 68 mm
- Material thickness of mounting surface: max. 20 mm

Variant	Prod. no.	GBP
● black	**1007329**	**13.00**
○ white	**1007328**	**13.00**
● aluminium	**1007330**	**18.00**
● Pink gold	**1007331**	**22.00**

NEW TRIA® 68
RING, ROUND,
GU10/LED MODULES



IP20

Ø: 8.2 cm
H: 4.4 cm
Material: Aluminium

- Installation Diameter: 68 mm
- Material thickness of mounting surface: max. 20 mm

Variant	Prod. no.	GBP
● black	**1007451**	**14.00**
○ white	**1007453**	**14.00**

NEW TRIA® 68
RING, ROUND,
GU10/LED MODULES



IP65

Ø: 8.2 cm
H: 3.4 cm
Material: Aluminium

- Installation Diameter: 68 mm
- Material thickness of mounting surface: max. 20 mm

Variant	Prod. no.	GBP
● black	**1007345**	**22.00**
○ white	**1007346**	**22.00**

NEW TRIA® 68
RING, SQUARE,
GU10/LED MODULES



IP65

L: 8.2 cm
W: 8.20 cm
H: 3.4 cm
Material: Aluminium

- Installation Diameter: 68 mm
- Material thickness of mounting surface: max. 20 mm

Variant	Prod. no.	GBP
● black	**1007347**	**22.00**
○ white	**1007348**	**22.00**

NEW TRIA® 68
RING, ROUND,
GU10/LED MODULES



IP65

Ø: 8.3 cm
H: 3.55 cm
Material: Aluminium

- Installation Diameter: 68 mm
- Material thickness of mounting surface: max. 20 mm

Variant	Prod. no.	GBP
● black	**1007336**	**31.00**
○ white	**1007337**	**31.00**

NEW TRIA® 68
RING, SQUARE,
GU10/LED MODULES



IP65

L: 8.3 cm
W: 8.30 cm
H: 3.55 cm
Material: Aluminium

- Installation Diameter: 68 mm
- Material thickness of mounting surface: max. 20 mm

Variant	Prod. no.	GBP
● black	**1007338**	**31.00**
○ white	**1007339**	**31.00**


POISSONNERIE
À RESERVER
PLATEAU DE FRUITS DE MER
- 8 huîtres creuses
- 8 crevettes roses
- 4 bulots
- 1 homard canadien
80€/2 pers
60€/1pers
+ mayonnaise
+ citron
+ vinaigre échalote
turbot, soles, calamars
coquillages de mer,
thon, saint-jacques....
à commander
selon arrivage
À EMPORTER
LES HUÎTRES
- OUVERTES ou FERMÉES -
SAUMON
CRUSTACÉS
. BISQUE DE HOMARD
- SOUPE DE POISSON
ROUILLE & CROUTONS
. COQUILLETTES
- COQUILLETTES
- LAPEREAU
. SAUCES
- BEURRE BLANC
- AIOLI
MAYONNAISE

NEW TRIA® 75
RING, ROUND,
GU10/LED MODULES



IP20

Ø: 9.3 cm
H: 2.6 cm
Material: Aluminium

- Installation Diameter: 75 mm
- Material thickness of mounting surface: max. 20 mm

Variant	Prod. no.	GBP
● black	**1007343**	**18.00**
○ white	**1007342**	**18.00**
◐ aluminium	**1007351**	**21.00**
◐ Pink gold	**1007344**	**25.00**

NEW TRIA® 75
RING, SQUARE,
GU10/LED MODULES



IP20

L: 9 cm
W: 9.00 cm
H: 2.6 cm
Material: Aluminium

- Installation Diameter: 75 mm
- Material thickness of mounting surface: max. 20 mm

Variant	Prod. no.	GBP
● black	**1007340**	**18.00**
○ white	**1007349**	**18.00**
◐ aluminium	**1007350**	**21.00**
◐ Pink gold	**1007341**	**25.00**

NEW TRIA® 75 XL
RING, ROUND,
GU10/LED MODULES



IP20

Ø: 11 cm
H: 2.6 cm
Material: Aluminium

- Installation Diameter: 75 mm
- Material thickness of mounting surface: max. 20 mm

Variant	Prod. no.	GBP
● black	**1007631**	**22.00**
○ white	**1007630**	**22.00**
◐ aluminium	**1007632**	**25.00**
◐ Pink gold	**1007633**	**30.00**

NEW TRIA® 75
RING, ROUND,
GU10/LED MODULES



IP20

Ø: 8.2 cm
H: 4.9 cm
Material: Aluminium

- Installation Diameter: 75 mm
- Material thickness of mounting surface: max. 20 mm

Variant	Prod. no.	GBP
● black	**1007449**	**17.00**
○ white	**1007450**	**17.00**

NEW TRIA® 75
RING, ROUND,
GU10/LED MODULES



IP20

Ø: 8.2 cm
H: 4.3 cm
Material: Aluminium

- Installation Diameter: 75 mm
- Material thickness of mounting surface: max. 20 mm

Variant	Prod. no.	GBP
● black	**1007488**	**13.00**
○ white	**1007489**	**13.00**

NEW TRIA® 75 XL
RING, SQUARE,
GU10/LED MODULES



IP20

L: 11 cm
W: 11.00 cm
H: 2.6 cm
Material: Aluminium

- Installation Diameter: 75 mm
- Material thickness of mounting surface: max. 20 mm


Variant	Prod. no.	GBP
● black	**1007635**	**22.00**
○ white	**1007634**	**22.00**
◐ aluminium	**1007636**	**25.00**
◐ Pink gold	**1007637**	**30.00**

CREATE YOUR NEW TRIA 95 DOWNLIGHT



LED module

+

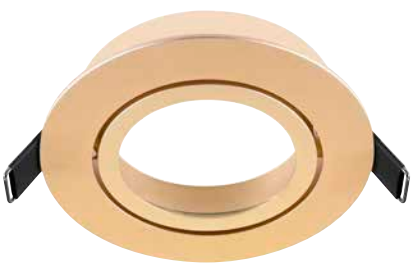

Version-95 mounting rings available in black, white, pink gold and aluminium


=



1007412 + 1007444 81

NEW TRIA®
DL, LED MODULE, PHASE





C,L IP20 50000h L80B10

220-240 V ~50/60 Hz | 350 mA
Total Wattage: 13.3 W
Material: Aluminium

LED INSIDE CRI 90

1007409	2700 K
1007411	1130 lm
1007410	3000 K
1007412	1200 lm

Variant	Prod. no.	GBP
● black 2700 K | 38°	**1007409**	**81.00**
● black 3000 K | 38°	**1007410**	**81.00**
● black 3000 K | 60°	**1007412**	**82.00**
○ white 2700 K | 60°	**1007411**	**81.00**

NEW TRIA® 95
RING, ROUND, LED MODULES



IP20

Ø: 11 cm
H: 2.6 cm
Material: Aluminium

- Installation Diameter: 95 mm
- Material thickness of mounting surface: max. 20 mm

Variant	Prod. no.	GBP
● black	**1007444**	**26.00**
○ white	**1007443**	**26.00**
● aluminium	**1007445**	**30.00**
● Pink gold	**1007447**	**35.00**

NEW TRIA® 95
RING, ROUND, LED MODULES



IP20

Ø: 10.3 cm
H: 5.5 cm
Material: Aluminium

- Installation Diameter: 95 mm
- Material thickness of mounting surface: max. 20 mm

Variant	Prod. no.	GBP
● black	**1007452**	**26.00**
○ white	**1007454**	**26.00**

NEW TRIA® 95
RING, SQUARE, LED MODULES



IP20

L: 11 cm
W: 11.00 cm
H: 2.6 cm
Material: Aluminium


- Installation Diameter: 95 mm
- Material thickness of mounting surface: max. 20 mm

Variant	Prod. no.	GBP
● black	**1007446**	**26.00**
○ white	**1007448**	**26.00**



NEW TRIA®
DL, DOUBLE, LED MODULE, PHASE





C,L IP20 38° 50000 h L80B10

220-240 V ~50/60 Hz | 350 mA
Total Wattage: 13.6 W
Material: Aluminium

LED INSIDE CRI 90

1008005	2700 K 1220 lm
1008006	3000 K 1280 lm

Variant	Prod. no.	GBP
● black 2700 K	**1008005**	**65.00**
● black 3000 K	**1008006**	**65.00**

NEW TRIA® 155
RING, DOUBLE, SQUARE GU10/ LED MODULE



IP20

L: 17 cm
W: 9.00 cm
H: 3.75 cm
Material: Aluminium

- Spring clips

Variant	Prod. no.	GBP
● black	**1008007**	**33.00**
○ white	**1008008**	**33.00**
● aluminium	**1008009**	**33.00**

CONFIGURE YOUR NEW TRIA®

For greater flexibility, the NEW TRIA offers the option of configuring customised sets from the modular system in addition to the existing sets. Simply choose the right options and benefit from rapid installation.


CHOOSE YOUR PREFERRED MOUNTING RING ...

1. Installation diameter: 68, 75, 95 mm
2. Pivoting, rotating and pivoting, IP65
3. Colour
   black, white, pink gold or aluminium
4. round or square

CHOOSE YOUR PREFERRED MODULE...

5. Colour temperature
   2700K or 3000K, 1800 — 3000K or CCT 2500 / 3000 / 4000K
6. Beam angle
   38° / 60°

DONE!

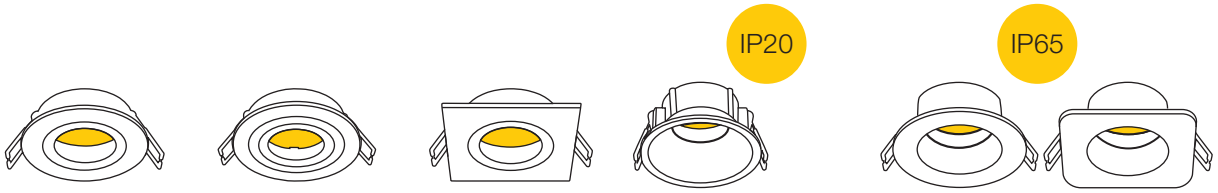


Mounting ring

Available as a pivoting, rotating and pivoting, or IP65 version
with 68, 75 or 95 mm installation diameter

Available in black, white, pink gold or aluminium

Available in round or square design

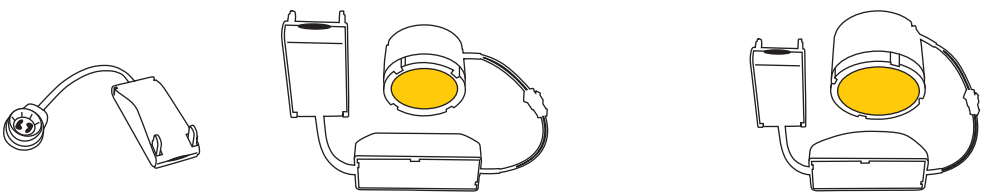

GU10 LED MODULE LED MODULE


NEW TRIA® 68 **NEW TRIA® 75** **NEW TRIA® 95**

Colour temperature
2700 / 3000K, DTW 1800 - 3000K or multi CCT

Beam angle
38° / 60°

Colour temperature
2700 / 3000K


Beam angle
38° / 60°

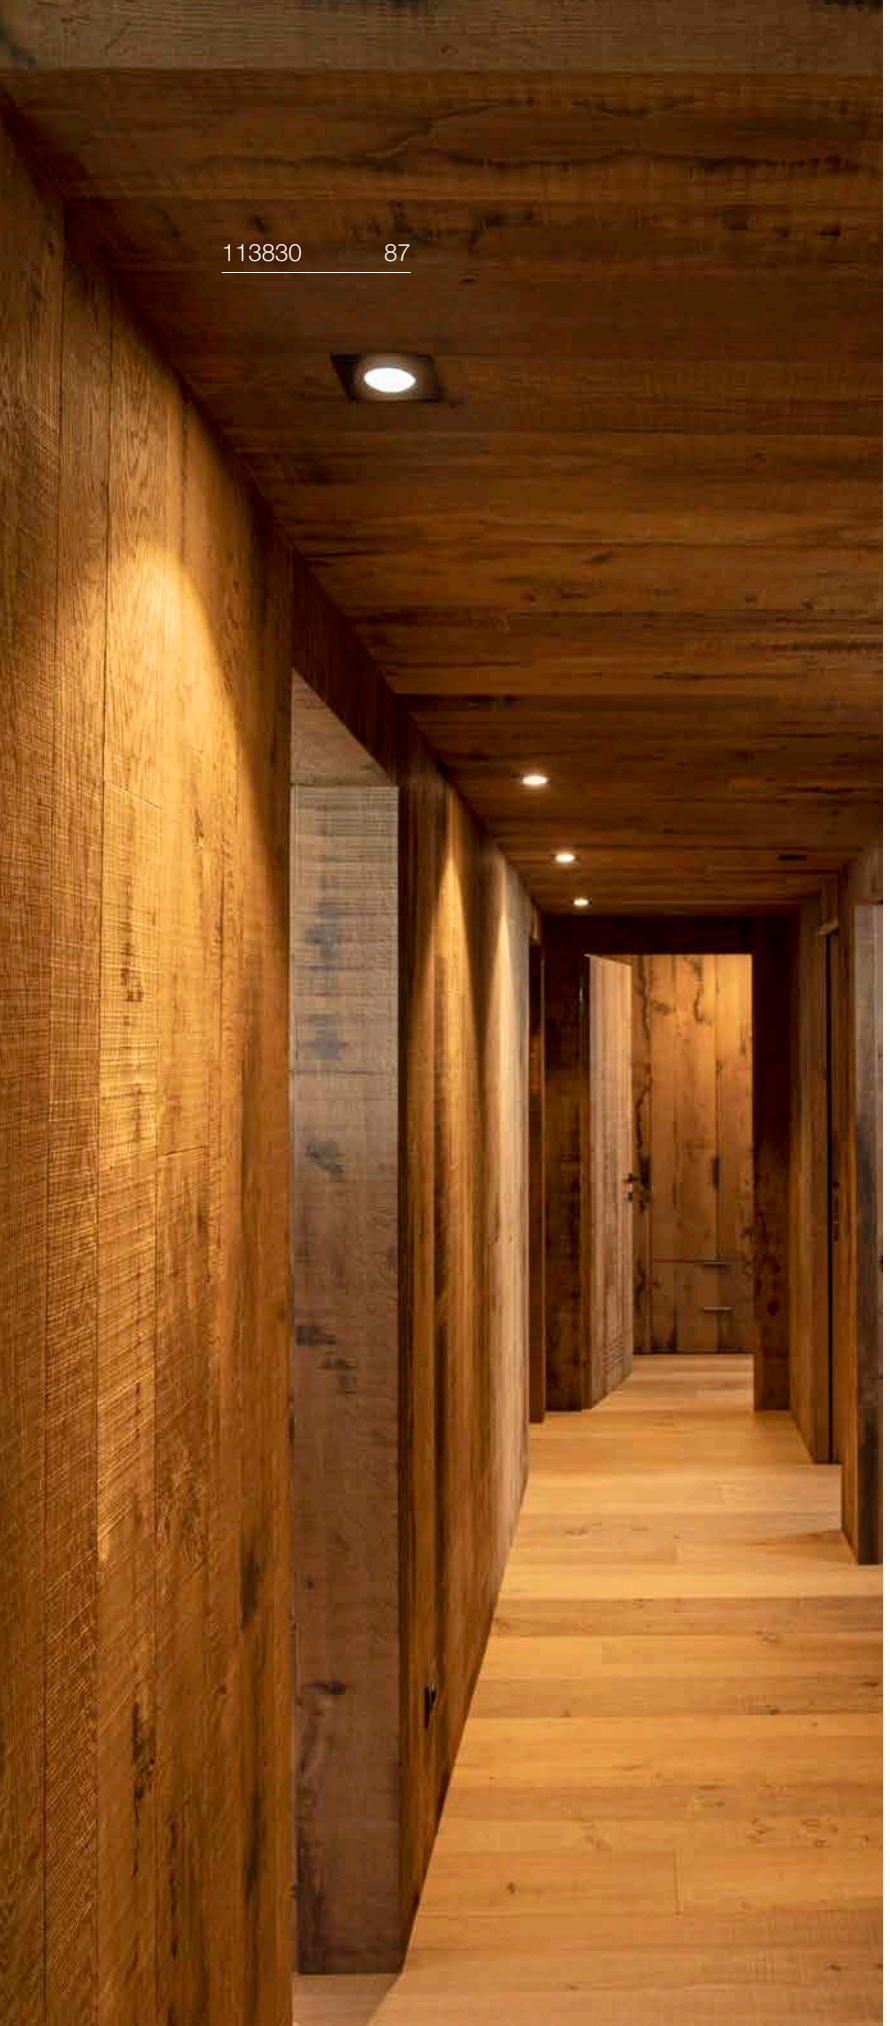

113830 87

NEW TRIA® 150
DL, ROUND, QPAR111







220-240 V ~50/60 Hz
Material: Aluminium

- Leaf springs



Base: 1xGU10

Variant	Prod. no.	GBP
● black	**113550**	**45.00**
○ white	**113540**	**45.00**


GU10 | 12 W | 55°
670 lm | 2700 K | EEC = G



Prod. no.: 1005297 73.00 GBP

NEW TRIA® 300
DL, ANGULAR, QPAR111





IP20 360° 30°

220-240 V ~50/60 Hz
Material: Aluminium

• Leaf springs

SOCKET INSIDE 75 W

Base: 1xGU10

Variant	Prod. no.	GBP
● black	**113830**	**45.00**
○ white	**113541**	**45.00**

GU10 | 8 W | 38°
680 lm | 2700 K | EEC = F


C,L



Prod. no.: **1005274** **26.00 GBP**

NEW TRIA®
DL, DOUBLE, QPAR111





IP20 360° 30°

220-240 V ~50/60 Hz
Material: Aluminium

• Spring clips

SOCKET INSIDE 75 W

Base: 2xGU10

Variant	Prod. no.	GBP
● black	**113840**	**90.00**
○ white	**113841**	**90.00**
● aluminium	**111382**	**99.00**

GU10 | 13 W | 10°
900 lm | 2700 K | EEC = G


C



Prod. no.: **1005275** **48.00 GBP**

GLENOS® PRO
RL, 1,2 M, DALI, UGR19






Dali Touch IP20 IK02 75° 100.000 h L80B20 UGR 19 30°

220-240 V ~0/50/60 Hz | 750 mA
Total Wattage: 30 W
Material: Aluminium/Plastic PC

LED INSIDE CRI 90


1010521 **1010522**	3000 K 3650 lm
1010523 **1010524**	4000 K 3900 lm

Variant	Prod. no.	GBP
● black 3650 lm | 3000 K	**1010522**	**399.00**
● black 3900 lm | 4000 K	**1010524**	**399.00**
◐ white/black 3650 lm | 3000 K	**1010521**	**399.00**
◐ white/black 3900 lm | 4000 K	**1010523**	**399.00**

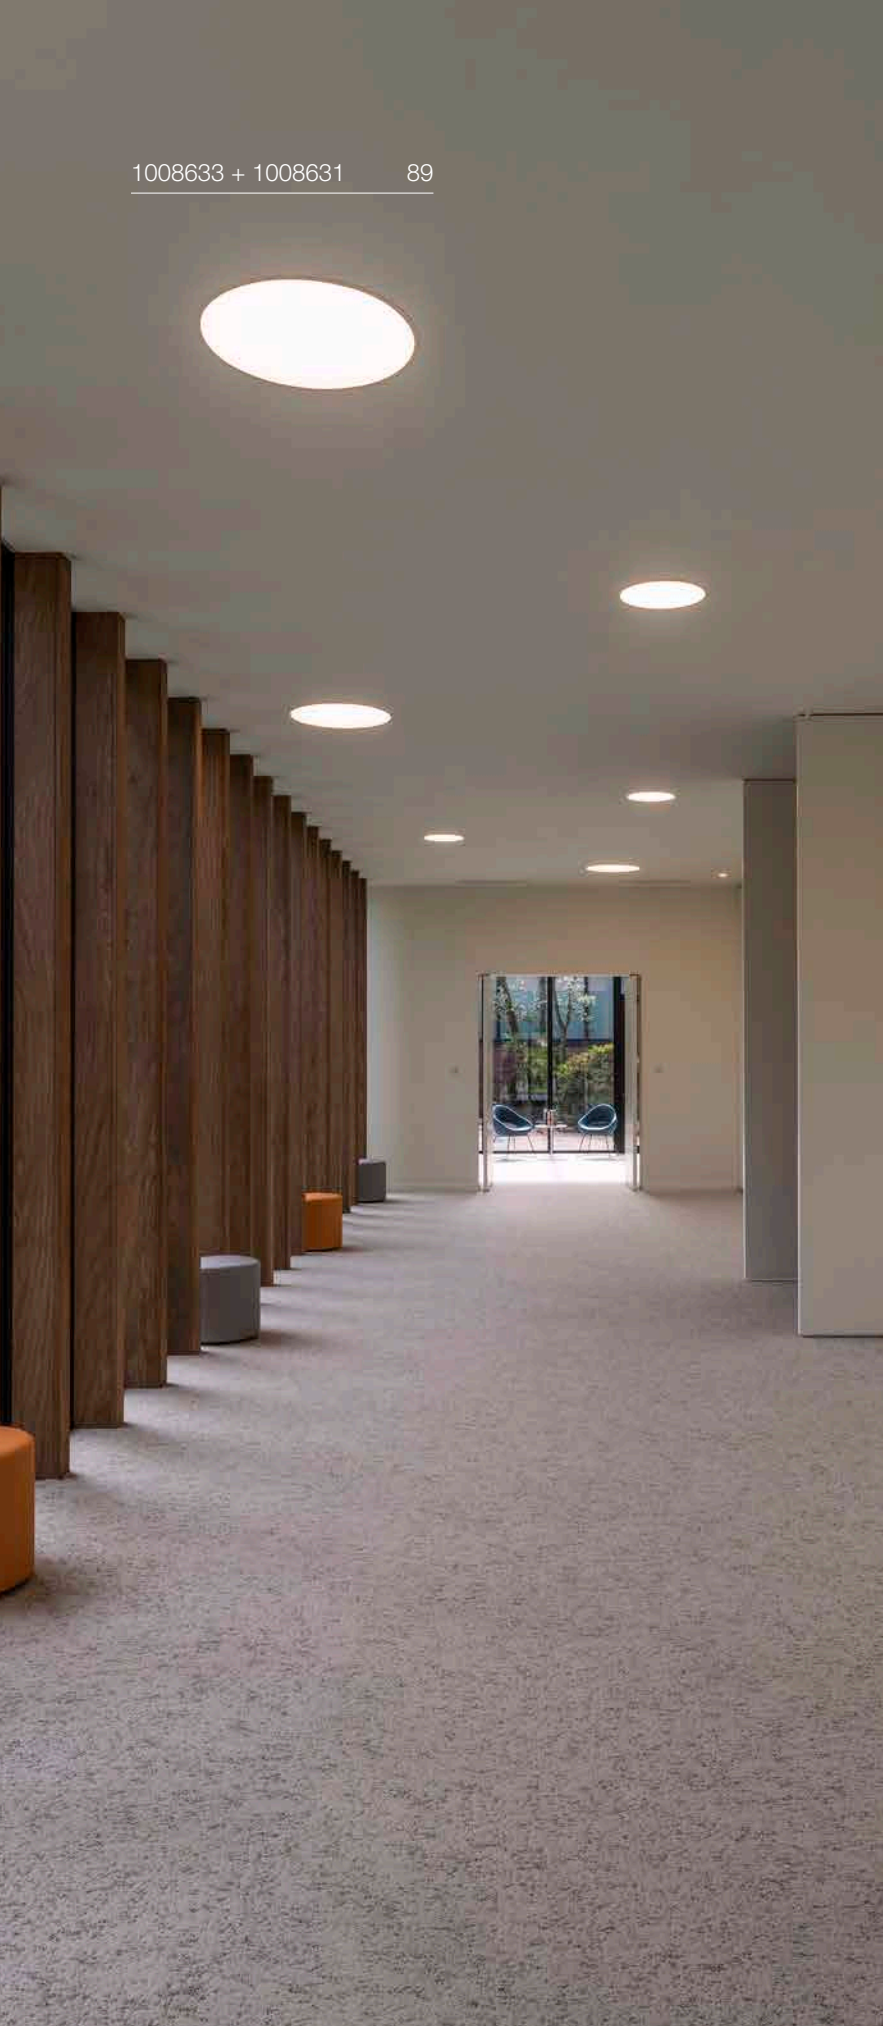

MEDO® 30
RL, FRAME



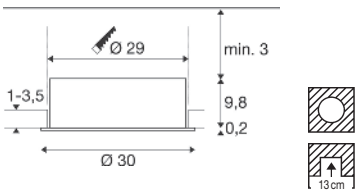



250 mA
Power consumption: 8 W
Material: Steel



Down	3000 K	4000 K
	1150 lm	1200 lm


Variant	Prod. no.	GBP
○ white	**1008629**	**142.00**

⊕

Product	Prod. no.	GBP
LED driver 10 W | 180-270 mA PHASE		
○ white	**1008660**	**28.00**
LED driver 15 W | 100-700 mA DALI		
○ white	**1008666**	**63.00**
Strain relief for non-dimmable drivers, standard		
○ white	**1008670**	**1.00**
Strain relief for non-dimmable drivers, through-wirable		
○ white	**1008671**	**3.00**
Strain relief for DALI dimmable drivers, standard		
○ white	**1008672**	**1.00**
Strain relief for DALI dimmable drivers, through-wirable		
○ white	**1008673**	**3.00**
LED driver 21 W | 150-500 mA		
○ white	**1008699**	**20.00**

MEDO® 40
RL, FRAME



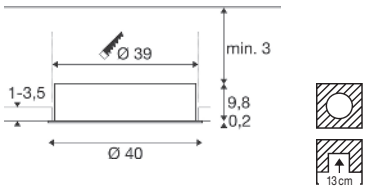

IP20 | 80° | 50000 h L80B10 | UGR 19

500 mA
Power Consumption: 16 W
Material: Steel

LED INSIDE | CCT | CRI 90

Down	3000 K	4000 K
	2350 lm	2450 lm


Variant	Prod. no.	GBP
○ white	**1008631**	**176.00**

⊕

Product	Prod. no.	GBP
LED driver 20 W | 350-500 mA PHASE		
○ white	**1008663**	**42.00**
LED driver 23 W | 100-700 mA DALI		
○ white	**1008667**	**68.00**
Strain relief for non-dimmable drivers, standard		
○ white	**1008670**	**1.00**
Strain relief for non-dimmable drivers, through-wirable		
○ white	**1008671**	**3.00**
Strain relief for DALI dimmable drivers, standard		
○ white	**1008672**	**1.00**
Strain relief for DALI dimmable drivers, through-wirable		
○ white	**1008673**	**3.00**
LED driver 21 W | 150-500 mA		
○ white	**1008699**	**20.00**

MEDO® 60
RL, FRAME



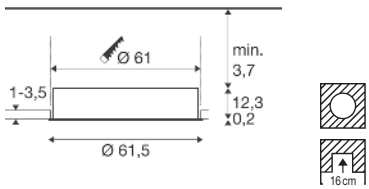

IP20 | 80° | 50000 h L80B10 | UGR 19

1000 mA
Power Consumption: 33 W
Material: Steel

LED INSIDE | CCT | CRI 90

Down	3000 K	4000 K
	4600 lm	4600 lm


Variant	Prod. no.	GBP
○ white	**1008633**	**399.00**

⊕

Product	Prod. no.	GBP
LED driver 40 W | 700-1050 mA PHASE		
○ white	**1008665**	**50.00**
LED driver 53 W | 650-1400 mA DALI		
○ white	**1008669**	**80.00**
Strain relief for non-dimmable drivers, standard		
○ white	**1008670**	**1.00**
Strain relief for non-dimmable drivers, through-wirable		
○ white	**1008671**	**3.00**
Strain relief for DALI dimmable driver 1008669, standard		
○ white	**1008674**	**1.00**
LED driver 44 W | 700-1050 mA		
○ white	**1008701** ●	**29.00**
Strain relief for DALI dimmable driver 1008669, through-wirable		
○ white	**1008702** ●	**3.00**

MEDO® 90
RL, FRAME



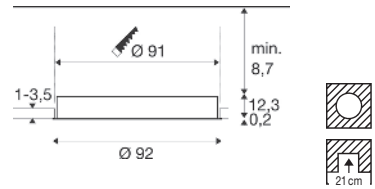

IP20 | 80° | 50000 h L80B10 | UGR 19

1000 mA
Power consumption: 66 W
Material: Aluminium


LED INSIDE | CCT | CRI 90

Down	3000 K	4000 K
	9200 lm	9500 lm

Variant	Prod. no.	GBP
○ white	**1008635**	**798.00**


⊕

Product	Prod. no.	GBP
LED driver 40 W | 700-1050 mA PHASE		
○ white	**1008665**	**50.00**
LED driver 53 W | 650-1400 mA DALI		
○ white	**1008669**	**80.00**
Strain relief for non-dimmable drivers, standard		
○ white	**1008670**	**1.00**
Strain relief for non-dimmable drivers, through-wirable		
○ white	**1008671**	**3.00**
Strain relief for DALI dimmable driver 1008669, standard		
○ white	**1008674**	**1.00**
LED driver 44 W | 700-1050 mA		
○ white	**1008701** ●	**29.00**
Strain relief for DALI dimmable driver 1008669, through-wirable		
○ white	**1008702** ●	**3.00**

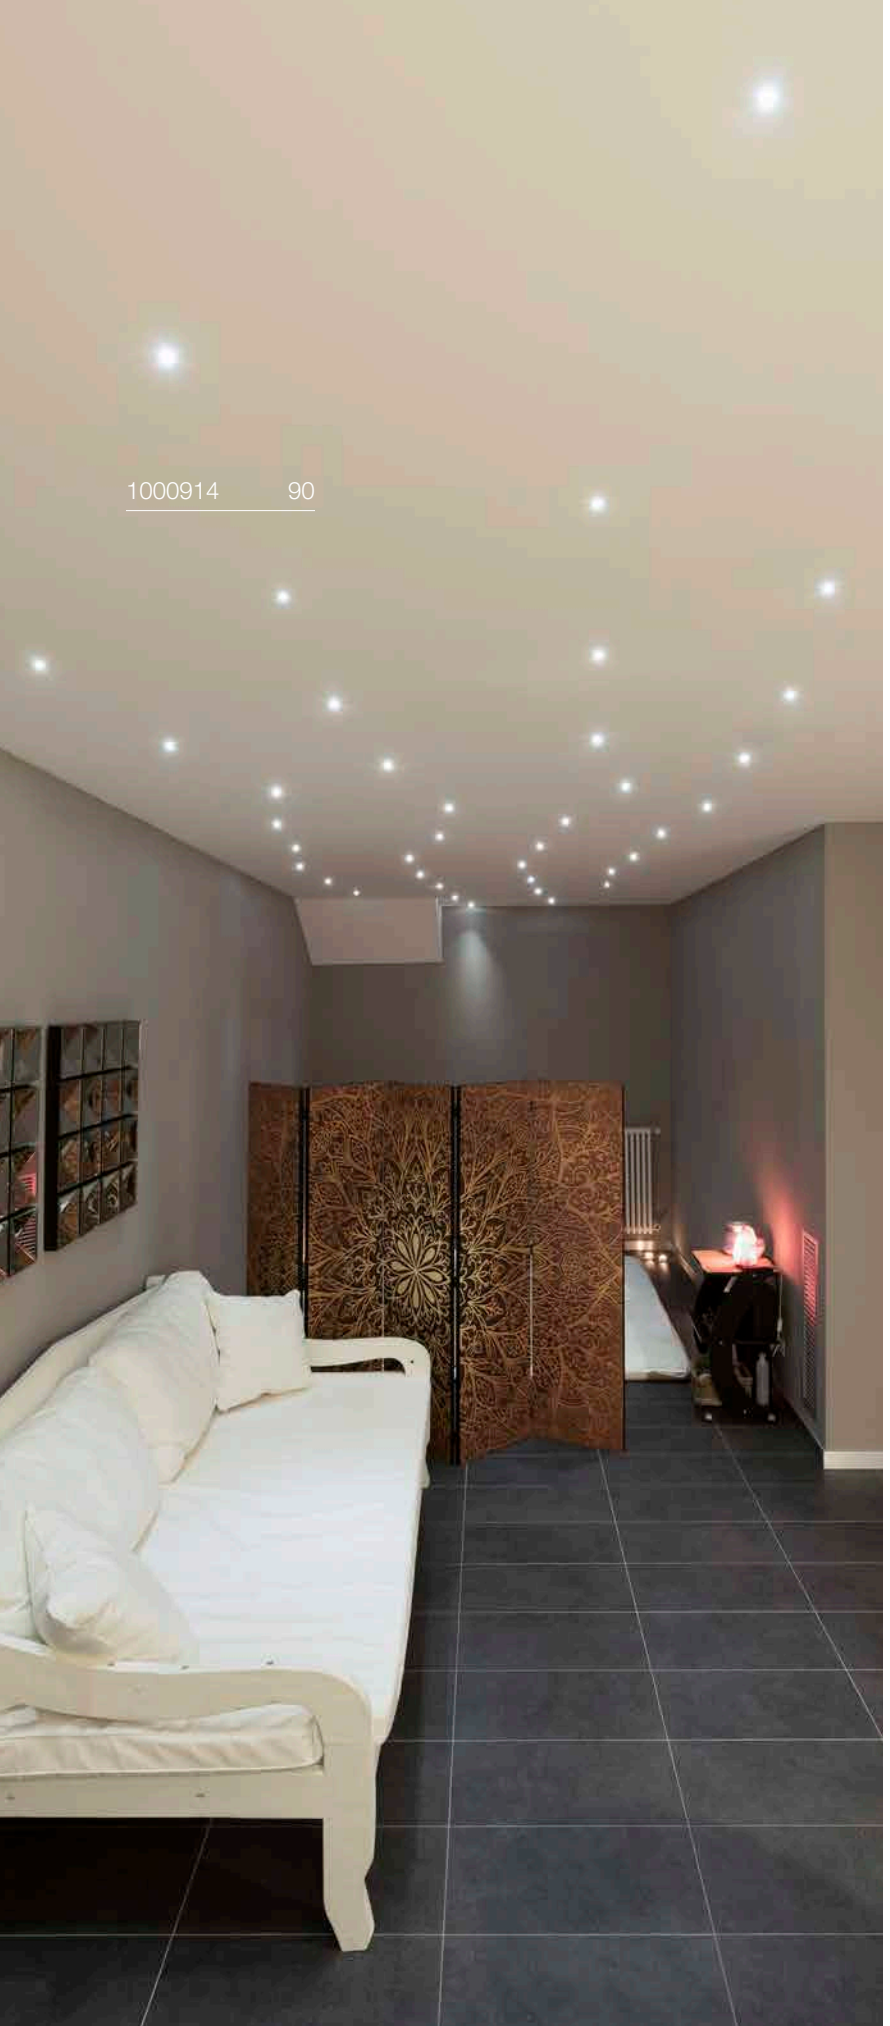

HORN MINI
EL







350 mA
Power Consumption: 1 W
Material: Aluminium/Polycarbonate (PC)

- Spring clips
- inc. AMP plug
- Different light colour with golden reflector



	3000 K
1000914	70 lm
1000915	
	2900 K
1000917	70 lm


Variant	Prod. no.	GBP
black/gold 2900 K	**1000917**	**39.00**
● black 3000 K	**1000915**	**36.00**
○ white 3000 K	**1000914**	**36.00**

⊕

Product	Prod. no.	GBP
LED driver 4 W | 350 mA		
○ white	**1008656**	**17.00**

HORN
DL, SINGLE, QPAR51





IP20 | 30° | 20

220-240 V ~50/60 Hz
Material: Aluminium

- Spring clips

SOCKET INSIDE | 25 W

Base: 1xGU10


Variant	Prod. no.	GBP
● black	**113140**	**46.00**
○ white	**113141**	**46.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no.: 1005077 7.00 GBP

HORN
DL, DOUBLE, QPAR51





IP20 | 30° | 20

220-240 V ~50/60 Hz
Material: Aluminium

- Spring clips

SOCKET INSIDE | 25 W

Base: 2xGU10

Variant	Prod. no.	GBP
● black	**1006121**	**66.00**
○ white	**1006122**	**66.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no.: 1005077 7.00 GBP


SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: 1012469 23.00 GBP

HORN
DL, SINGLE, ASYMMETRICAL, QPAR51





IP20/IP44 | IK02 | 20

220-240 V ~50/60 Hz
Material: Aluminium

- Spring clips

SOCKET INSIDE | 25 W

Base: 1xGU10

Variant	Prod. no.	GBP
● black	**113150**	**50.00**
○ white	**113151**	**50.00**


GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no.: 1005076 7.00 GBP



HORN
DL, SINGLE, QPAR51





IP20/ IP44 · IK02 · 20

220-240 V ~50/60 Hz
Material: Aluminium

- Spring clips

SOCKET INSIDE · 25 W

Base: 1xGU10


Variant	Prod. no.	GBP
● black	**113160**	**31.00**
○ white	**113161**	**31.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no.: **1005077** **7.00 GBP**

HORN 1
EL, SINGLE, QPAR51





IP20

220-240 V ~50/60 Hz
Material: Steel

- Spring clips

SOCKET INSIDE · 50 W

Base: 1xGU10 max. Ø: 5.1 cm | L: 5.4 cm

Variant	Prod. no.	GBP
● black	**112910**	**25.00**
○ white	**112911**	**25.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no.: **1005077** **7.00 GBP**


SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: **1012469** **23.00 GBP**

HORN
DL, GU10, BLOWER DOOR TESTED





IP20/ IP44 · IK02

220-240 V ~50/60 Hz
Material: Aluminium

- Spring clips
- The downlight is compliant with RT2012 standards.

SOCKET INSIDE 25 W

Base: 1xGU10

Variant	Prod. no.	GBP
● black	1005435	24.00
○ white	1005436	24.00

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no.: 1005077 7.00 GBP


SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: 1012469 23.00 GBP

HORN T
EL, QPAR111





IP20 · 15°

220-240 V ~50/60 Hz
Material: Steel

- Spring clips

SOCKET INSIDE 75 W

Base: 1xGU10


Variant	Prod. no.	GBP
● black	113170	61.00
○ white	113171	61.00

GU10 | 12 W | 55°
670 lm | 2700 K | EEC = G

Prod. no.: 1005297 73.00 GBP

HORN MAGNA
EL





IP20 · 25° · 30000 h L70B50 · 30

500 mA
Power Consumption: 9 W
Material: Aluminium/Polycarbonate (PC)


- Spring clips
- Different light colour with golden reflector
- open cable end

LED INSIDE CRI 80

1002591	3000 K 550 lm
1002592	3000 K 445 lm
1002594	3000 K 570 lm

Variant	Prod. no.	GBP
● black/gold 570 lm	1002594	68.00
● black 445 lm	1002592	66.00
○ white 550 lm	1002591	66.00


Product	Prod. no.	GBP
Honeycomb module		
● black	1002596	4.00
LED driver 21 W | 500 mA including strain relief		
○ white	1007226	26.00
LED driver 20 W | 350 mA/500 mA Phase control dimmable including strain relief		
○ white	1007227	36.00
LED driver 25 W | 150-700 mA DALI dimmable including strain relief		
○ white	1007229	62.00

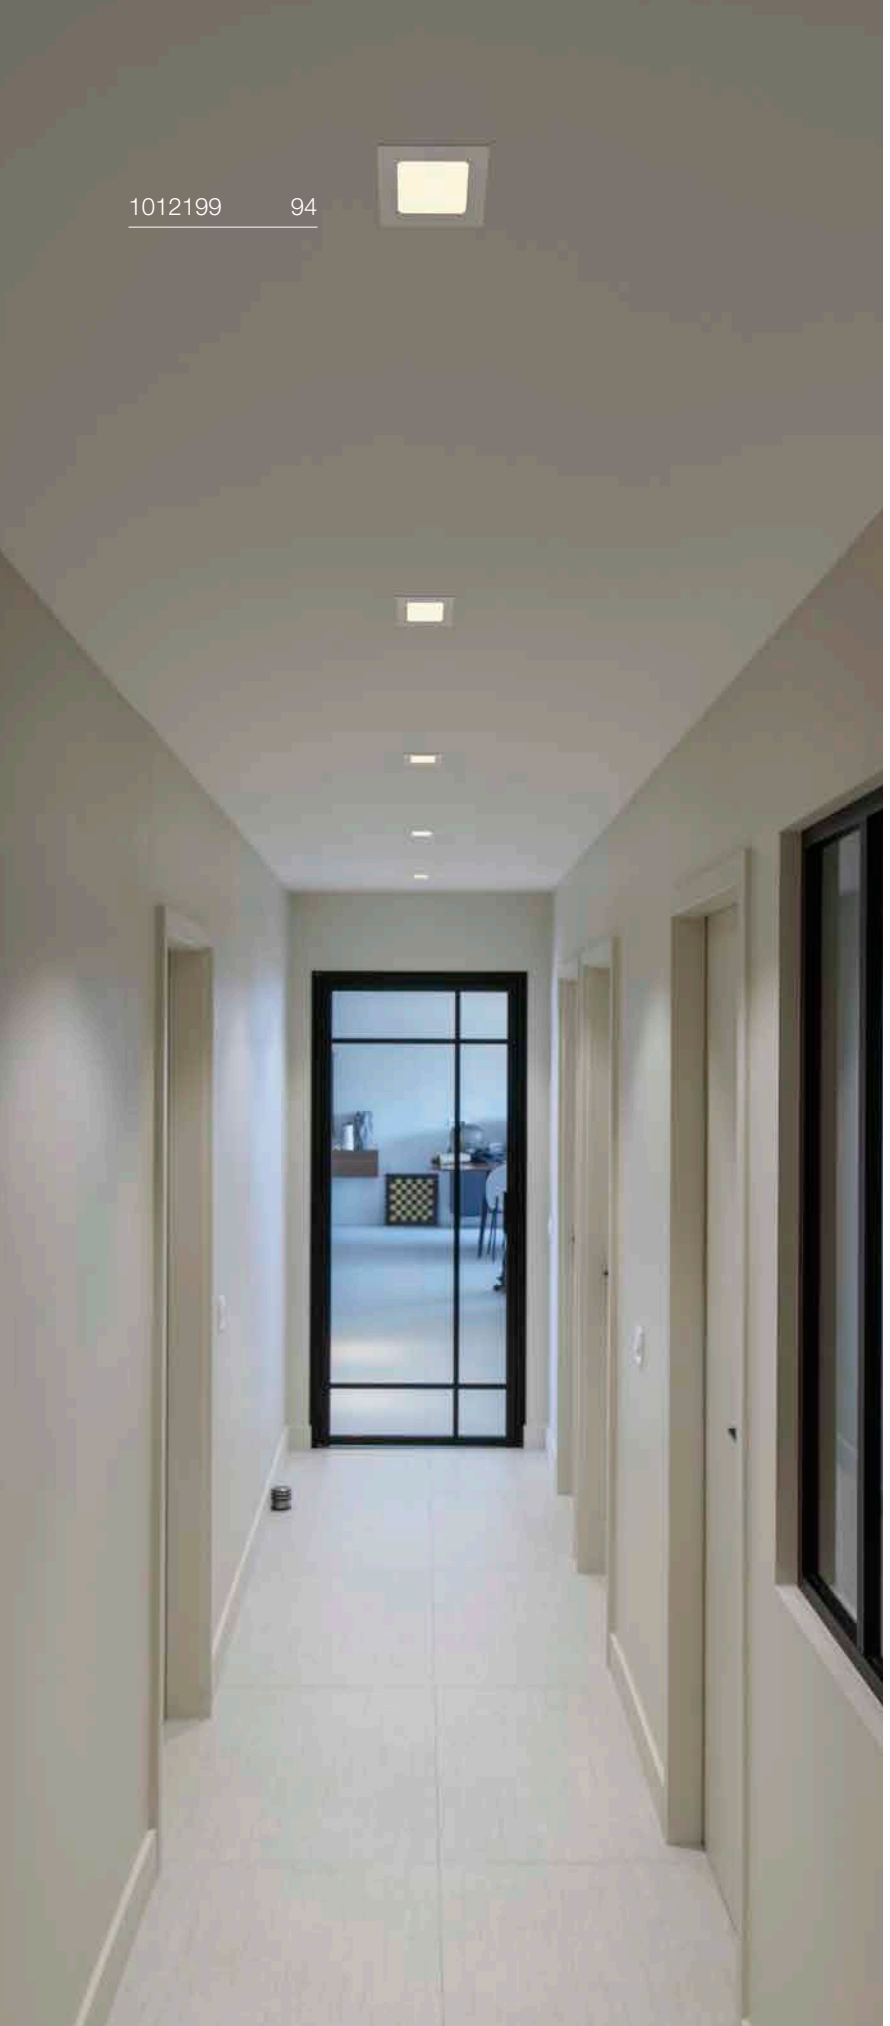

1012199 94

SENSER 2.0 12
RL, SQUARE, PHASE

NEW





220-240 V ~50/60 Hz | 350 mA
Total Wattage: 8.4 W
Material: Aluminium/Plastic PC




	3000 K	4000 K
1012199 Down	650 lm	650 lm

Variant	Prod. no.	GBP
○ white	**1012199** ●	**42.00**

SENSER 2.0 18
RL, SQUARE, PHASE



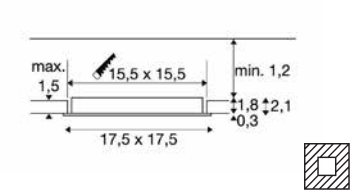



220-240 V ~50/60 Hz | 350 mA
Total Wattage: 12 W
Material: Aluminium/Plastic PC




		3000 K	4000 K
1012201	Down	1100 lm	1150 lm

Variant	Prod. no.	GBP
○ white	**1012201** ●	**60.00**

SENSER 2.0 24
RL, SQUARE, PHASE








220-240 V ~50/60 Hz | 350 mA
Total Wattage: 20 W
Material: Aluminium/Plastic PC




		3000 K	4000 K
1012203	Down	1900 lm	2000 lm

Variant	Prod. no.	GBP
○ white	**1012203** ●	**68.00**

SENSER 2.0 30
RL, SQUARE, PHASE

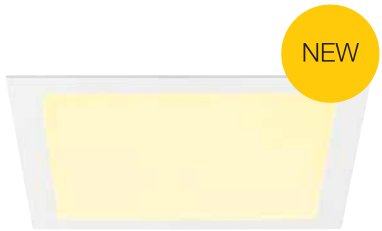

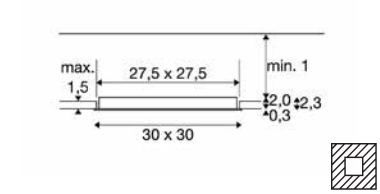




220-240 V ~50/60 Hz | 500 mA
Total Wattage: 25 W
Material: Aluminium/Plastic PC




		3000 K	4000 K
1012205	Down	2550 lm	2700 lm

Variant	Prod. no.	GBP
○ white	**1012205** ●	**92.00**

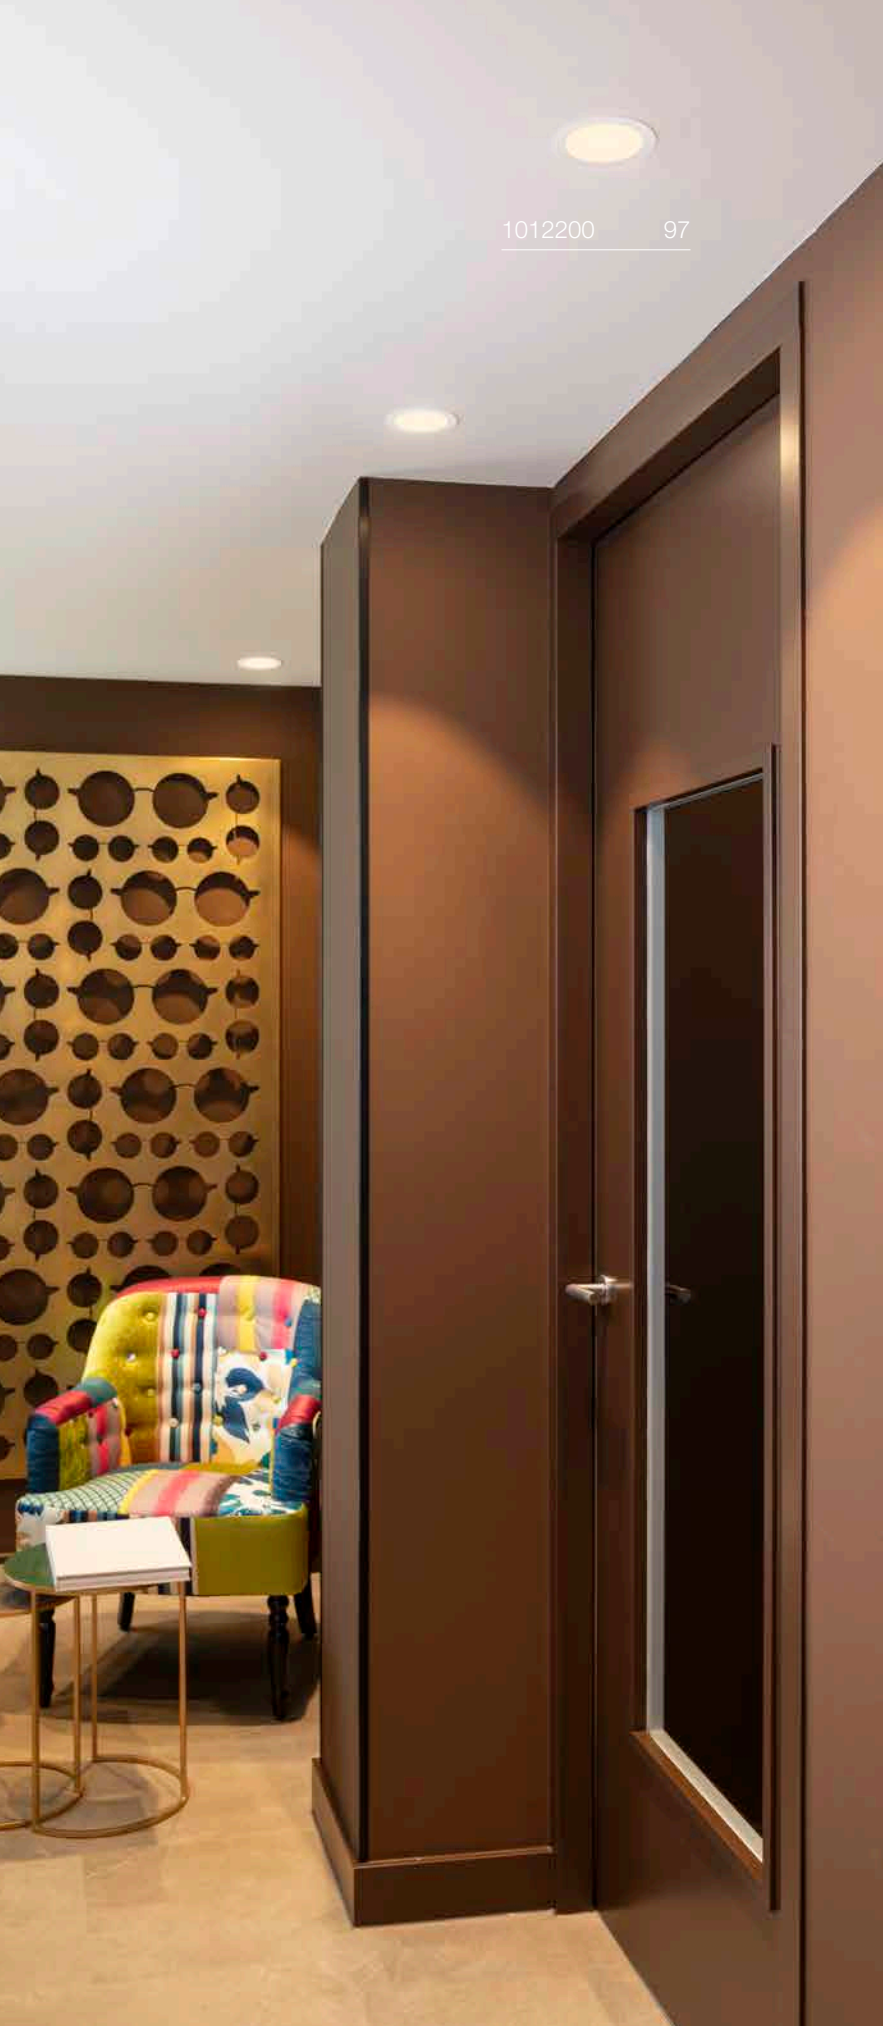

SENSER 2.0 12
RL, ROUND, PHASE

NEW





220-240 V ~50/60 Hz | 350 mA
Total Wattage: 8 W
Material: Aluminium/Plastic PC




	3000 K	4000 K
1012198 Down	600 lm	650 lm

Variant	Prod. no.	GBP
○ white	**1012198** ●	**42.00**

SENSER 2.0 18
RL, ROUND, PHASE

NEW

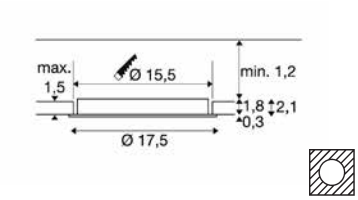

IP20 IK02 90° 50000 h L80B10

220-240 V ~50/60 Hz | 350 mA
Total Wattage: 12 W
Material: Aluminium/Plastic PC


INSIDE CCT CRI 90

	3000 K	4000 K
1012200 Down	1100 lm	1200 lm

Variant	Prod. no.	GBP
○ white	**1012200** ●	**60.00**

SENSER 2.0 24
RL, ROUND, PHASE

NEW

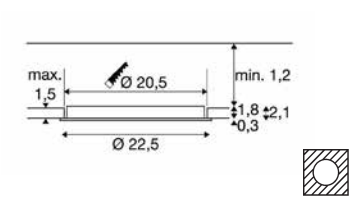

IP20 IK02 90° 50000 h L80B10 UGR 25

220-240 V ~50/60 Hz | 350 mA
Total Wattage: 18 W
Material: Aluminium/Plastic PC


INSIDE CCT CRI 90

	3000 K	4000 K
1012202 Down	1800 lm	1900 lm

Variant	Prod. no.	GBP
○ white	**1012202** ●	**68.00**

SENSER 2.0 30
RL, ROUND, PHASE

NEW

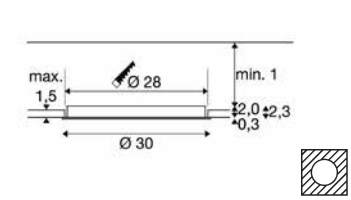

IP20 IK02 90° 50000 h L80B10 UGR 22

220-240 V ~50/60 Hz | 500 mA
Total Wattage: 25 W
Material: Aluminium/Plastic PC


INSIDE CCT CRI 90

	3000 K	4000 K
1012204 Down	2450 lm	2600 lm

Variant	Prod. no.	GBP
○ white	**1012204** ●	**92.00**

SENSER 2.0 12
RL, SQUARE, DALI

NEW





220-240 V ~50/60 Hz | 350 mA
Total Wattage: 7 W
Material: Aluminium/Plastic PC




	3000 K	4000 K
1012207 Down	650 lm	650 lm

Variant	Prod. no.	GBP
○ white	**1012207** ●	**77.00**

SENSER 2.0 18
RL, SQUARE, DALI








220-240 V ~50/60 Hz | 350 mA
Total Wattage: 12 W
Material: Aluminium/Plastic PC




1012229 Down	3000 K 1100 lm	4000 K 1150 lm

Variant	Prod. no.	GBP
○ white	**1012229** ●	**96.00**

SENSER 2.0 24
RL, SQUARE, DALI







220-240 V ~50/60 Hz | 500 mA
Total Wattage: 18 W
Material: Aluminium/Plastic PC




1012210 Down	3000 K 1900 lm	4000 K 2000 lm

Variant	Prod. no.	GBP
○ white	**1012210** ●	**105.00**

SENSER 2.0 30
RL, SQUARE, DALI







220-240 V ~50/60 Hz | 500 mA
Total Wattage: 24 W
Material: Aluminium/Plastic PC



1012212 Down	3000 K 2550 lm	4000 K 2700 lm

Variant	Prod. no.	GBP
○ white	**1012212** ●	**126.00**






SENSER 2.0 12
RL, ROUND, DALI

NEW







220-240 V ~50/60 Hz | 350 mA
Total Wattage: 7 W
Material: Aluminium/Plastic PC




	3000 K	4000 K
1012206 Down	600 lm	650 lm

Variant	Prod. no.	GBP
○ white	**1012206** ●	**77.00**

SENSER 2.0 18
RL, ROUND, DALI

NEW

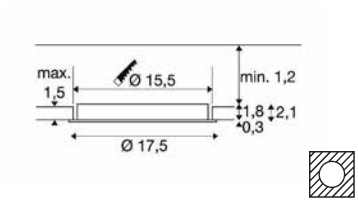

Dali IP20 IK02 90° 50000 h L80B10

220-240 V ~50/60 Hz | 350 mA
Total Wattage: 12 W
Material: Aluminium/Plastic PC


LED INSIDE CCT CRI 90

	3000 K	4000 K
1012208 Down	1100 lm	1200 lm

Variant	Prod. no.	GBP
○ white	**1012208** ●	**96.00**

SENSER 2.0 24
RL, ROUND, DALI

NEW

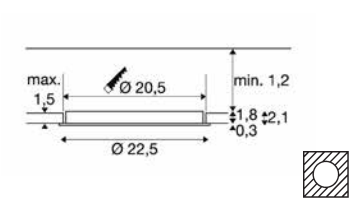

Dali IP20 IK02 90° 50000 h L80B10 UGR 25

220-240 V ~50/60 Hz | 500 mA
Total Wattage: 18 W
Material: Aluminium/Plastic PC


LED INSIDE CCT CRI 90

	3000 K	4000 K
1012209 Down	1800 lm	1900 lm

Variant	Prod. no.	GBP
○ white	**1012209** ●	**105.00**

SENSER 2.0 30
RL, ROUND, DALI

NEW

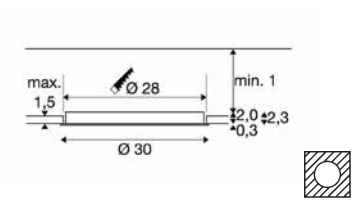

Dali IP20 IK02 90° 50000 h L80B10 UGR 22

220-240 V ~50/60 Hz | 500 mA
Total Wattage: 24 W
Material: Aluminium/Plastic PC

LED INSIDE CCT CRI 90

	3000 K	4000 K
1012211 Down	2450 lm	2600 lm

Variant	Prod. no.	GBP
○ white	**1012211** ●	**126.00**




DOWNLIGHT VARIO 220

22 830/840 WH ML

NEW









220-240 V ~50/60 Hz | 100 / 190 mA
Total Wattage: 9 W / 18 W
Material: Plastic PC


- For installation in ceiling cut-outs measuring 65–195 mm
- Also suitable for surface mounting
- BEG-eligible



9 W	3000 K 1150 lm	4000 K 1200 lm
18 W	3000 K 2200 lm	4000 K 2250 lm

Variant	Prod. no.	GBP
○ white	**1010397** ●	**42.00**

DOWNLIGHT VARIO 290
28 830/840 WH ML

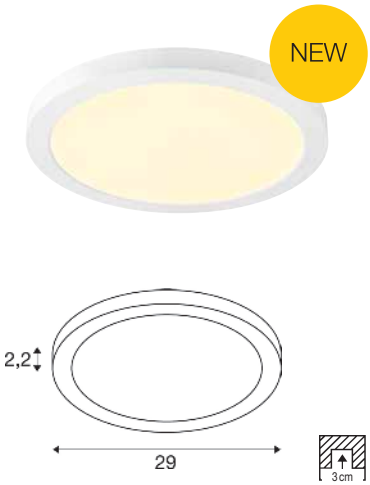

IP20 IK03 110° 50000 h L80B50 21

220-240 V ~50/60 Hz | 80 / 170 mA
Total Wattage: 11 W / 23 W
Material: Plastic PC


- For installation in ceiling cut-outs measuring 65–265 mm
- Also suitable for surface mounting
- BEG-eligible

LED INSIDE CCT CRI 80

11 W	3000 K 1550 lm	4000 K 1600 lm
23 W	3000 K 2950 lm	4000 K 3000 lm

Variant	Prod. no.	GBP
○ white	1010398 ●	59.00

DOWNLIGHT VARIO 220
22 830/840 WH ML PIR

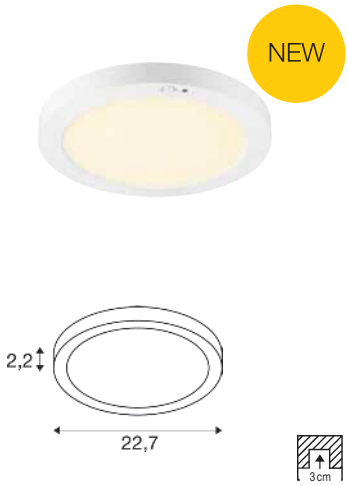

IP20 IK03 110° 50000 h L80B50 30

220-240 V ~50/60 Hz | 90 / 180 mA
Total Wattage: 9 W / 18 W
Material: Plastic PC


- For installation in ceiling cut-outs measuring 65–195 mm
- Also suitable for surface mounting
- BEG-eligible

LED INSIDE CCT CRI 80

9 W	3000 K 1150 lm	3500 K 1175 lm	4000 K 1200 lm
18 W	3000 K 2200 lm	3500 K 2225 lm	4000 K 2250 lm

Variant	Prod. no.	GBP
○ white	1010399 ●	50.00

DOWNLIGHT VARIO 290
28 830/840 WH ML PIR

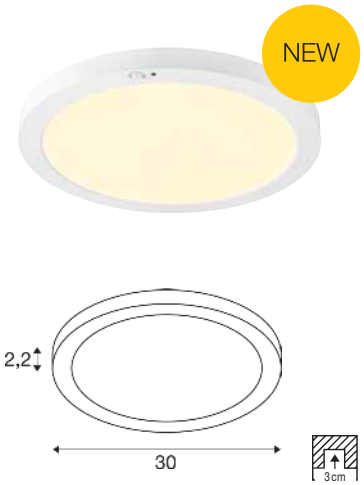

IP20 IK03 110° 50000 h L80B50 21

220-240 V ~50/60 Hz | 80 / 160 mA
Total Wattage: 11 W / 23 W
Material: Plastic PC

- For installation in ceiling cut-outs measuring 65–265 mm
- Also suitable for surface mounting
- BEG-eligible


LED INSIDE CCT CRI 80

11 W	3000 K 1550 lm	3500 K 1575 lm	4000 K 1600 lm
23 W	3000 K 2950 lm	3500 K 2975 lm	4000 K 3000 lm

Variant	Prod. no.	GBP
○ white	1010400 ●	67.00

VERLUX
EL, SQUARE, PHASE



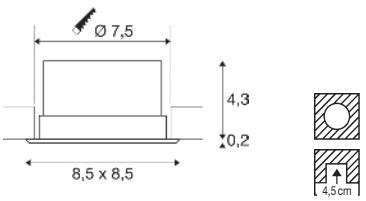

IP20 IK02 80° 35000 h L70B50

220-240 V ~50/60 Hz | 500 mA
Total Wattage: 11 W
Material: Aluminium/Plastic


- Spring clips
- Material thickness of mounting surface: max. 20 mm

LED INSIDE CRI 80

3000 K
940 lm

Variant	Prod. no.	GBP
○ white	**112682**	**79.00**

VERLUX
EL, SQUARE, PHASE

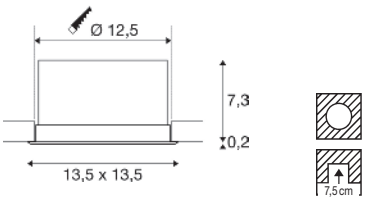

IP20 IK02 80° 35000 h L70B50

220-240 V ~50/60 Hz | 500 mA
Total Wattage: 22 W
Material: Aluminium/Plastic

- Spring clips
- Material thickness of mounting surface: max. 20 mm


LED INSIDE

3000 K
1800 lm

Variant	Prod. no.	GBP
○ white	**112692**	**117.00**

DL 126
EL





IP20 | 90° | 60000 h L70B50

12 V
Power consumption: 2.8 W
Material: Aluminium/Plastic

- Spring clips

LED INSIDE | CRI 80

3000 K
170 lm


Variant	Prod. no.	GBP
○ white	**112221**	**31.00**
◑ chrome	**112222**	**37.00**
● grey	**112225**	**31.00**

⊕

Product	Prod. no.	GBP
LED power supply 12 V | 24 W, round		
○ white	**1008651**	**23.00**

PIKA
DL, ROUND, QPAR51, RIGID





IP20 | 50

220-240 V ~50/60 Hz
Material: Aluminium

- Spring clips

SOCKET INSIDE | 10 W

Base: 1xGU10

Variant	Prod. no.	GBP
○ white	**1000714**	**12.00**
● brass	**1000716**	**16.00**
◑ chrome	**1000715**	**17.00**
● grey	**1000717**	**12.00**


GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

C,L

Prod. no.: 1005077 7.00 GBP

PIKA
DL, ROUND, QPAR51, PIVOTING





IP20 | 30° | 50

220-240 V ~50/60 Hz
Material: Aluminium

- Spring clips

SOCKET INSIDE | 10 W

Base: 1xGU10

Variant	Prod. no.	GBP
○ white	**1000718**	**17.00**
● brass	**1000720**	**19.00**
◑ chrome	**1000719**	**19.00**
● grey	**1000721**	**16.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

C,L

Prod. no.: 1005077 7.00 GBP

SMART


GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: 1012469 23.00 GBP


117311 107

OCULUS
CL, MOVE, PHASE







220-240 V ~50/60 Hz | 250 mA
Total Wattage: 11 W
Material: Aluminium


- Spring clips
- Additional frosted lens included



2000 K	3000 K
36 lm	780 lm

Variant	Prod. no.	GBP
● black	**1004668**	**147.00**
○ white	**1004669**	**147.00**

OCCULDAS 14
EL, INDIRECT, PHASE





220-240 V ~50/60 Hz | 350 mA
Total Wattage: 15 W
Material: Aluminium/Steel


- Spring clips



	3000 K
117331	810 lm

Variant	Prod. no.	GBP
○ white	**117331**	**147.00**

OCCULDAS 23
EL, INDIRECT, PHASE





220-240 V ~50/60 Hz | 700 mA
Total Wattage: 23 W
Material: Aluminium/Steel

- Spring clips




	3000 K
117311	1500 lm

Variant	Prod. no.	GBP
○ white	**117311**	**268.00**

ENOLA® 2.0 S
RL, SINGLE, GU10 MINI, PAR11

NEW







220-240 V ~50/60 Hz
Material: Aluminium/Steel/Plastic PC

SOCKET INSIDE 5 W

Base: 1xGU10 | max. Ø: 3.6 cm | L: 4.6 cm

Variant	Prod. no.	GBP
● black	1011919	42.00
○ white	1011920	42.00

GU10 | 5 W | 36°
390 lm | 2700 K | EEC = F

C,L


Prod. no.: 1011670 10.00 GBP

Product	Prod. no.	GBP
ENOLA® 2.0 S, Deco Ring		
● black	1011753	4.00
○ white	1011754	4.00
gold	1011755	4.00
copper	1011756	4.00

ENOLA® 2.0 S
RL, DOUBLE, GU10 MINI, PAR11

NEW







220-240 V ~50/60 Hz
Material: Aluminium/Steel/Plastic PC

SOCKET INSIDE 5 W

Base: 2xGU10 | max. Ø: 3.6 cm | L: 4.6 cm

Variant	Prod. no.	GBP
● black	1011921	88.00
○ white	1011922	88.00

GU10 | 5 W | 36°
390 lm | 2700 K | EEC = F

C,L

Prod. no.: 1011670 10.00 GBP

Product	Prod. no.	GBP
ENOLA® 2.0 S, Deco Ring		
● black	1011753	4.00
○ white	1011754	4.00
gold	1011755	4.00
copper	1011756	4.00

ENOLA® 2.0 S
DECORATIVE RING

NEW




Ø: 3.9 cm
H: 1.1 cm
Material: Plastic PC

Variant	Prod. no.	GBP
● black	1011753	4.00
○ white	1011754	4.00
gold	1011755	4.00
copper	1011756	4.00

ENOLA® 2.0 M
RL, SINGLE, GU10, QPAR51

NEW





IP20 IK02 340° 90° 50

220-240 V ~50/60 Hz
Material: Aluminium/Steel/Plastic PC

SOCKET INSIDE 10 W

Base: 1xGU10 | max. Ø: 5.1 cm | L: 6 cm

Variant	Prod. no.	GBP
● black	**1011899**	**52.00**
○ white	**1011900**	**52.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

C,L

Prod. no.: 1005077 7.00 GBP

SMART


GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F


Prod. no.: 1012469 23.00 GBP

Product	Prod. no.	GBP
ENOLA® 2.0/BIMA 2.0 M, Deco Ring		
● black	**1011749**	**4.00**
○ white	**1011750**	**4.00**
● gold	**1011751**	**4.00**
● copper	**1011752**	**4.00**

ENOLA® 2.0 M
RL, DOUBLE, GU10, QPAR51

NEW





IP20 IK02 340° 90° 50

220-240 V ~50/60 Hz
Material: Aluminium/Steel/Plastic PC

SOCKET INSIDE 10 W

Base: 2xGU10 | max. Ø: 5.1 cm | L: 6 cm

Variant	Prod. no.	GBP
● black	**1011901**	**92.00**
○ white	**1011902**	**92.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

C,L

Prod. no.: 1005077 7.00 GBP

SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: 1012469 23.00 GBP

Product	Prod. no.	GBP
ENOLA® 2.0/BIMA 2.0 M, Deco Ring		
● black	**1011749**	**4.00**
○ white	**1011750**	**4.00**
● gold	**1011751**	**4.00**
● copper	**1011752**	**4.00**


ENOLA® 2.0/BIMA 2.0 M
DECORATIVE RING

NEW




Ø: 5.4 cm
H: 2 cm
Material: Plastic PC

Variant	Prod. no.	GBP
● black	**1011749**	**4.00**
○ white	**1011750**	**4.00**
● gold	**1011751**	**4.00**
● copper	**1011752**	**4.00**

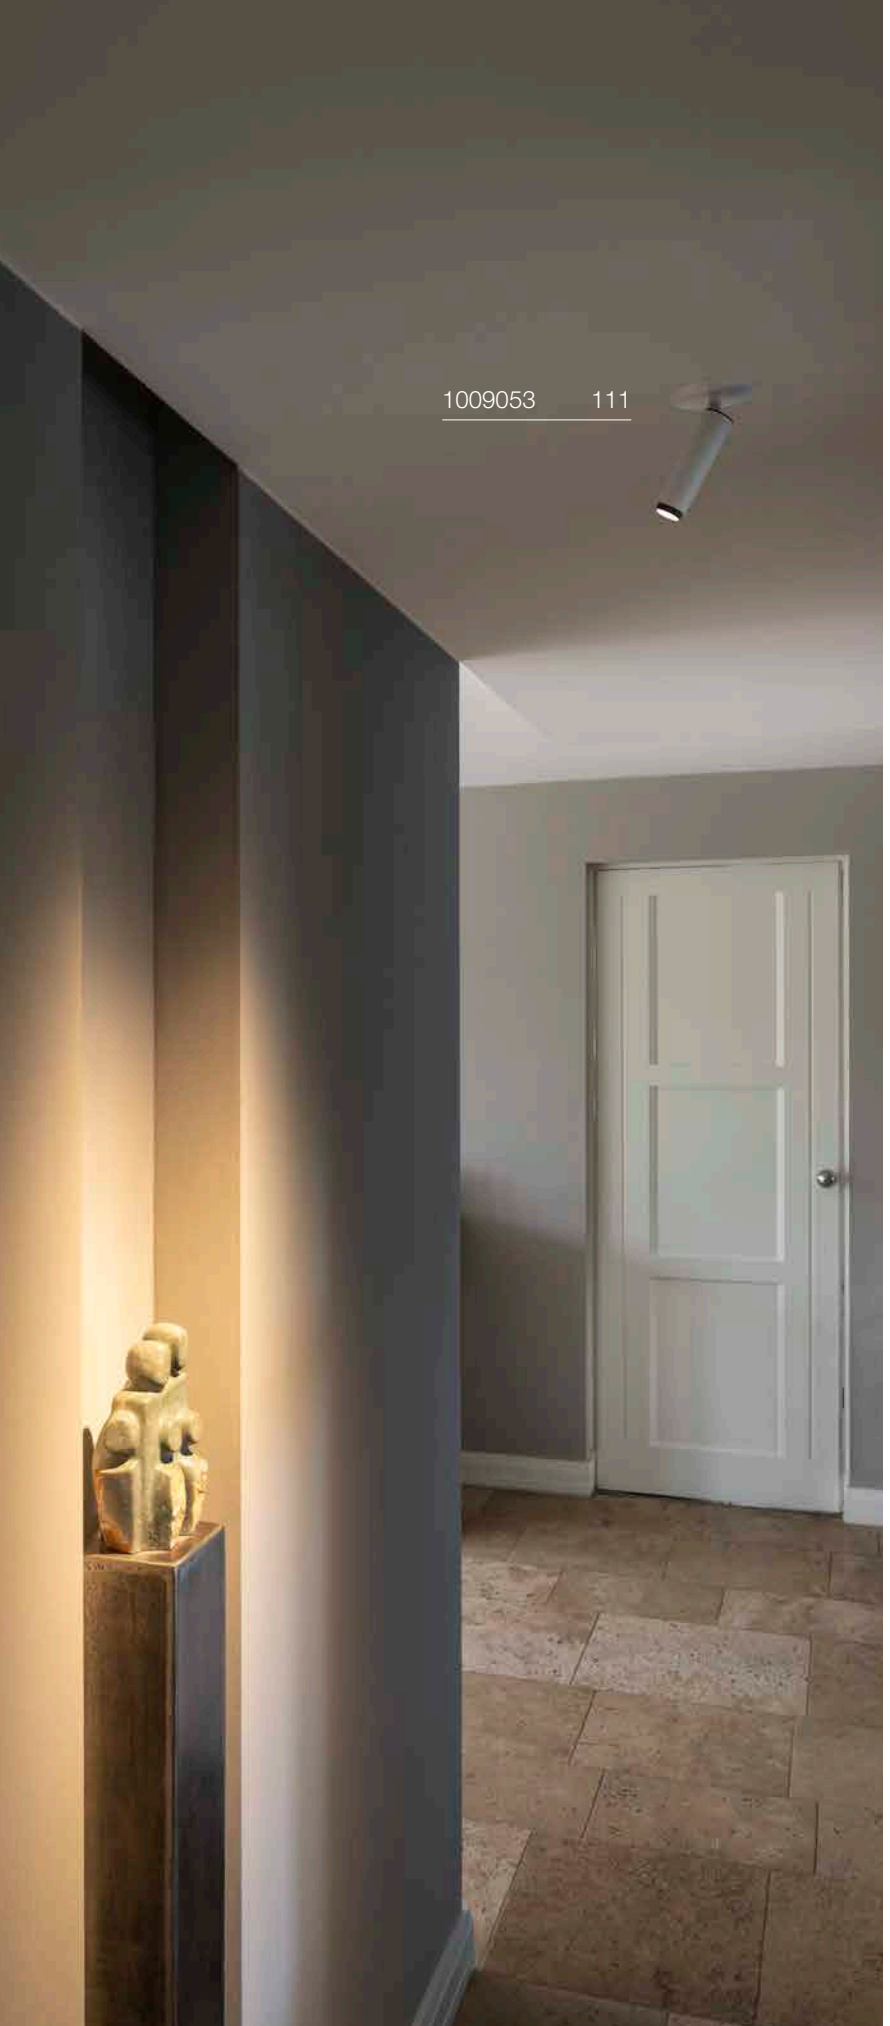

KARPO 30
EL







500 mA
Power Consumption: 7.5 W
Material: Aluminium/Steel

- When connecting several lights, make sure they are connected in series!
- When using different drivers, the lights can be combined with the Veleto system.
- Driver not included

LED INSIDE CRI 90

	3000 K
152380	450 lm
	3000 K
152381	470 lm

Variant	Prod. no.	GBP
● black	**152380**	**109.00**
○ white	**152381**	**109.00**


⊕

Product	Prod. no.	GBP
LED driver 21 W | 500 mA including strain relief		
○ white	**1007226**	**26.00**
LED driver 20 W | 350 mA/500 mA Phase control dimmable including strain relief		
○ white	**1007227**	**36.00**
LED driver 25 W | 150-700 mA DALI dimmable including strain relief		
○ white	**1007229**	**62.00**

GRIP! S
WL, RECESSED, Ø 3,0 CM

NEW





Switch · IP20 · 29° · 310° · 35° · 50000h L80B10

220-240 V ~50/60 Hz | 12 V
Total Wattage: 4.2 W
Material: Aluminium

- Honeycomb accessories included
- Includes a USB-C charger and dimmer switch

LED INSIDE · CRI 90

	2700 K 190 lm	

Variant	Prod. no.	GBP
black/gold	**1012364**	**189.00**
white/black	**1012363**	**189.00**
bronze/black	**1012365**	**189.00**


⊕

Product	Prod. no.	GBP
GRIP! S, Deco Ring + Spacer		
white	**1011829**	**16.00**
black	**1011830**	**16.00**
Nickel	**1011831**	**16.00**
gold	**1011832**	**16.00**
HONEYCOMB + Spacer		
black	**1011837**	**8.00**

GRIP! S
EL, PHASE, Ø 3,0 CM

GERMAN DESIGN AWARD WINNER 2025





C,L · IP20 · IK02 · 29° · 340° · 90° · 50000h L80B10 · UGR 25

220-240 V ~50/60 Hz | 250 mA
Total Wattage: 10 W
Material: Steel

- Honeycomb accessories included
- Including external LED driver

LED INSIDE · CRI 90


1009052 **1009054** **1009056** **1009058**	Down	2700 K 590 lm
1009053 **1009055** **1009057** **1009059**	Down	3000 K 620 lm

Variant	Prod. no.	GBP
black/gold 590 lm | 2700 K	**1009054**	**113.00**
black/gold 620 lm | 3000 K	**1009055**	**113.00**
white/black 590 lm | 2700 K	**1009052**	**113.00**
white/black 620 lm | 3000 K	**1009053**	**113.00**
gold/black 590 lm | 2700 K	**1009058**	**113.00**
gold/black 620 lm | 3000 K	**1009059**	**113.00**
bronze/black 590 lm | 2700 K	**1009056**	**113.00**
bronze/black 620 lm | 3000 K	**1009057**	**113.00**

GRIP! M
EL, PHASE, Ø 4,3 CM

GERMAN DESIGN AWARD WINNER 2025





C · IP20 · IK02 · 42° · 340° · 90° · 50000h L80B10 · UGR 25

220-240 V ~50/60 Hz | 350 mA
Total Wattage: 14 W
Power Consumption: 17 W
Material: Steel

- Honeycomb accessories included
- Including external LED driver

LED INSIDE · CRI 90

1009084 **1009086** **1009088** **1009090**	Down	2700 K 1460 lm
1009085 **1009087** **1009089** **1009091**	Down	3000 K 1460 lm

Variant	Prod. no.	GBP
black/gold 2700 K	**1009086**	**147.00**
black/gold 3000 K	**1009087**	**147.00**
white/black 2700 K	**1009084**	**147.00**
white/black 3000 K	**1009085**	**147.00**
gold/black 2700 K	**1009090**	**147.00**
gold/black 3000 K	**1009091**	**147.00**
bronze/black 2700 K	**1009088**	**147.00**
bronze/black 3000 K	**1009089**	**147.00**

⊕


Product	Prod. no.	GBP
GRIP! M, Deco Ring		
white	**1011833**	**18.00**
black	**1011834**	**18.00**
nickel	**1011835**	**18.00**
gold	**1011836**	**18.00**
HONEYCOMB + Spacer		
black	**1011838**	**10.00**

148071 113



PLASTRA
RL, ROUND, QPAR51





IP20

220-240 V ~50/60 Hz
Material: Plaster/Steel

- Spring clips

SOCKET INSIDE 35 W

Base: 1xGU10

Variant	Prod. no.	GBP
○ white	**148070**	**37.00**


GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

C,L

Prod. no.: 1005076 7.00 GBP

PLASTRA
RL, SQUARE, QPAR51





IP20

220-240 V ~50/60 Hz
Material: Plaster/Steel

- Spring clips

SOCKET INSIDE 35 W

Base: 1xGU10

Variant	Prod. no.	GBP
○ white	**148071**	**37.00**


GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

C,L

Prod. no.: 1005076 7.00 GBP

VARU
EL, QPAR51





IP20/ IP65 IK02

220-240 V ~50/60 Hz
Material: Aluminium/Glass

- Spring clips

SOCKET INSIDE 5 W


Base: 1xGU10 max. Ø: 5.1 cm

Variant	Prod. no.	GBP
● black	**1001930**	**37.00**
○ white	**1001931**	**37.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F


C,L

Prod. no.: 1005077 7.00 GBP

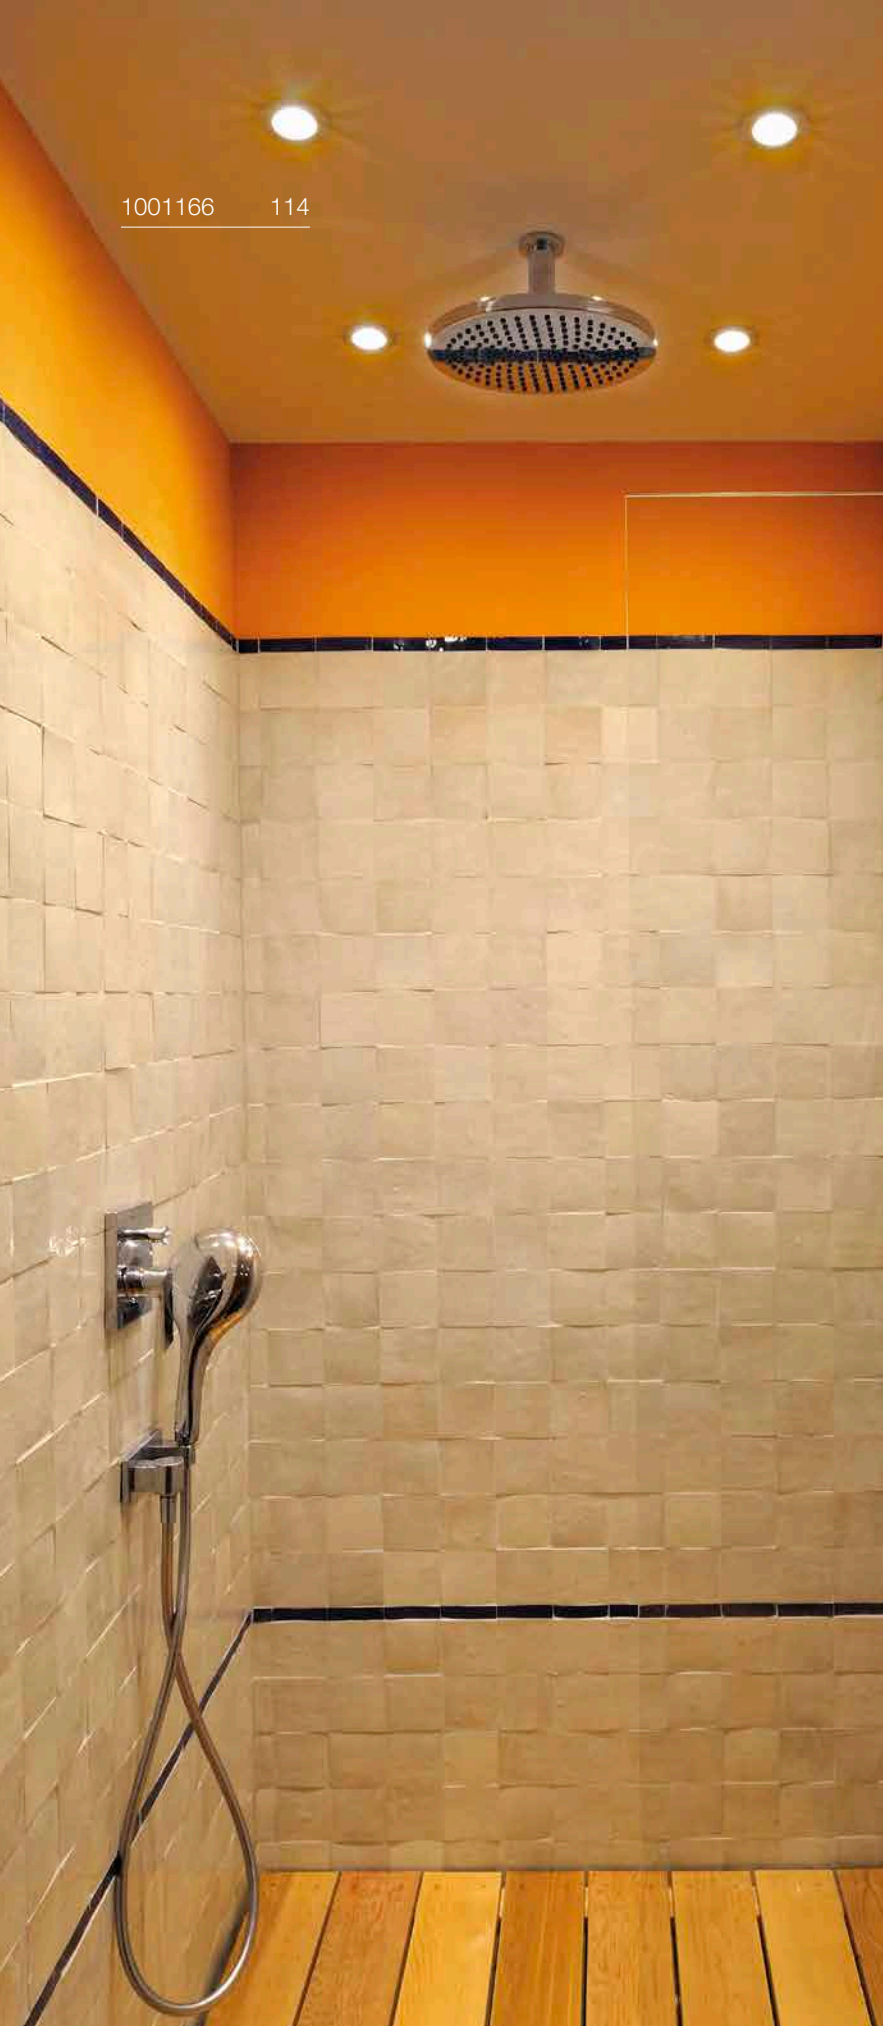

DOLIX OUT
EL, ROUND, QPAR51





IP65 IK02

220-240 V ~50/60 Hz
Material: Aluminium/Glass

- Spring clips

SOCKET INSIDE 50 W

Base: 1xGU10

Variant	Prod. no.	GBP
white	**1001165**	**31.00**
silver	**1001168**	**35.00**
chrome	**1001166**	**35.00**
grey	**1001167**	**31.00**


GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

C,L

Prod. no.: 1005077 7.00 GBP

DOLIX OUT
EL, SQUARE, QPAR51





IP65 IK02 50

220-240 V ~50/60 Hz
Material: Aluminium/Glass

• Spring clips

SOCKET INSIDE 10 W

Base: 1xGU10

Variant	Prod. no.	GBP
○ white	**1001169**	**31.00**
○ silver	**1001172**	**35.00**
● grey	**1001171**	**31.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

C,L

Prod. no.: 1005077 7.00 GBP


SMART

GU10 | 5 W | 100°
300 lm | 2000 K-6500 K | EEC = G

Prod. no.: 1012470 29.00 GBP

KINI
EL, PHASE





C,L IP65 IK02 60° 30000 h L70B50

220-240 V ~50/60 Hz | 260 mA
Total Wattage: 12 W
Material: Aluminium/Polycarbonate (PC)

• Spring clips


LED INSIDE CRI 80

3000 K
850 lm

Variant	Prod. no.	GBP
○ white	**1000833**	**92.00**

AKALO D83
EL





C,L IK02 90° 30000 h L70B50 UGR 28


220-240 V ~50/60 Hz | 120 mA
Total Wattage: 9 W
Material: Aluminium/Polycarbonate (PC)

• Spring clips

LED INSIDE CCT CRI 80


3000 K	4000 K	5700 K
800 lm	880 lm	850 lm

Variant	Prod. no.	GBP
○ white	**1001264**	**37.00**

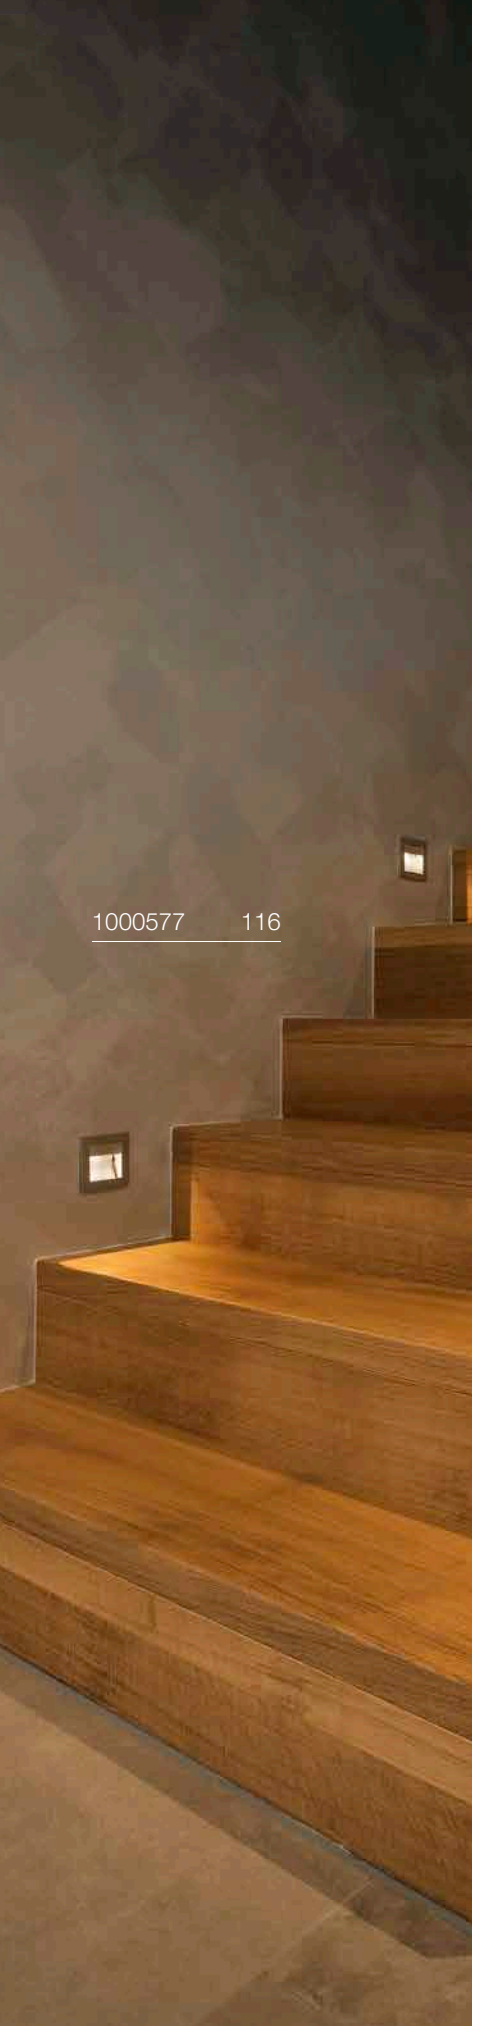

1000577 116

FRAME BASIC
RL



IP20 90° 50000 h L70B50

220-240 V ~50/60 Hz | 350 mA
Total Wattage: 8.3 W
Material: Aluminium/Acrylic


- Spring clips

LED INSIDE CRI 80

3000 K
600 lm

Variant	Prod. no.	GBP
● black	112720	47.00
○ white	112721	47.00

FRAME BASIC
RL, HV



IP20 60000 h L70B50

100-240 V ~50/60 Hz | 350 mA
Total Wattage: 3 W
Material: Aluminium

- Leaf springs

LED INSIDE CRI 90

2700 K
170 lm


Variant	Prod. no.	GBP
○ white	1000576	62.00
● grey	1000577	62.00

⊕

Product	Prod. no.	GBP
Flush frame		
● gold	112780	6.00
Wall box		
● black	112781	10.00

FRAME BASIC
RL





IP20 | 30000h L70B50

350 mA
Power Consumption: 1 W
Material: Aluminium/Glass

- Leaf springs
- When connecting several lights, make sure they are connected in series!
- AMP connector included / driver not included

LED INSIDE | CRI 90

3000 K
40 lm


Variant	Prod. no.	GBP
○ white	113262	35.00
● grey	111262	35.00

⊕

Product	Prod. no.	GBP
Flush frame		
● gold	112780	6.00
Wall Box		
● black	112781	10.00
LED driver 4W 350mA		
○ white	1008656	17.00

FRAME CURVE
EL





IP20 | 60000h L70B50

100-240 V ~50/60 Hz | 350 mA
Total Wattage: 3 W
Material: Aluminium

- Leaf springs

LED INSIDE | CRI 90

2700 K
140 lm


Variant	Prod. no.	GBP
○ white	1000574	67.00
● grey	1000575	67.00

⊕

Product	Prod. no.	GBP
Flush Frame		
● gold	112780	6.00
Wall Box		
● black	112781	10.00

FRAME CURVE
EL





IP20 | 30000h L70B50

350 mA
Power consumption: 1 W
Material: Aluminium

- When connecting several lights, make sure they are connected in series!
- When using different drivers, the lights can be combined with the Veleto system.
- AMP connector included / driver not included

LED INSIDE | CRI 90

3000 K
60 lm


Variant	Prod. no.	GBP
○ white	113292	47.00
● grey	111292	47.00

⊕

Product	Prod. no.	GBP
Flush Frame		
● gold	112780	6.00
Wall Box		
● black	112781	10.00
LED driver 4W 350mA		
○ white	1008656	17.00


1002980 119

NOTAPO S
RL



IP20 | 35000h L70B50 | 30

700 mA
Power Consumption: 2.2 W
Material: Aluminium

- Leaf springs
- When connecting several lights, make sure they are connected in series!
- Open cable end

LED INSIDE | CRI 90


	3000 K
	6 lm

Variant	Prod. no.	GBP
○ white	**1002979**	**52.00**

⊕

Product	Prod. no.	GBP
NOTAPO | mounting frame		
● black	**1002981**	**21.00**
LED driver 25 W | 150-700 mA DALI dimmable including strain relief		
○ white	**1007229**	**62.00**
LED Driver 4 W | 700 mA		
○ white	**1008657**	**17.00**

NOTAPO L
RL



IP20 | 35000h L70B50 | 30

700 mA
Power Consumption: 2.2 W
Material: Aluminium

- Leaf springs
- When connecting several lights, make sure they are connected in series!
- Open cable end


LED INSIDE | CRI 90

	3000 K
	6 lm

Variant	Prod. no.	GBP
○ white	**1002980**	**72.00**


⊕

Product	Prod. no.	GBP
NOTAPO | mounting frame		
● black	**1002981**	**21.00**
LED driver 25 W | 150-700 mA DALI dimmable including strain relief		
○ white	**1007229**	**62.00**
LED Driver 4 W | 700 mA		
○ white	**1008657**	**17.00**

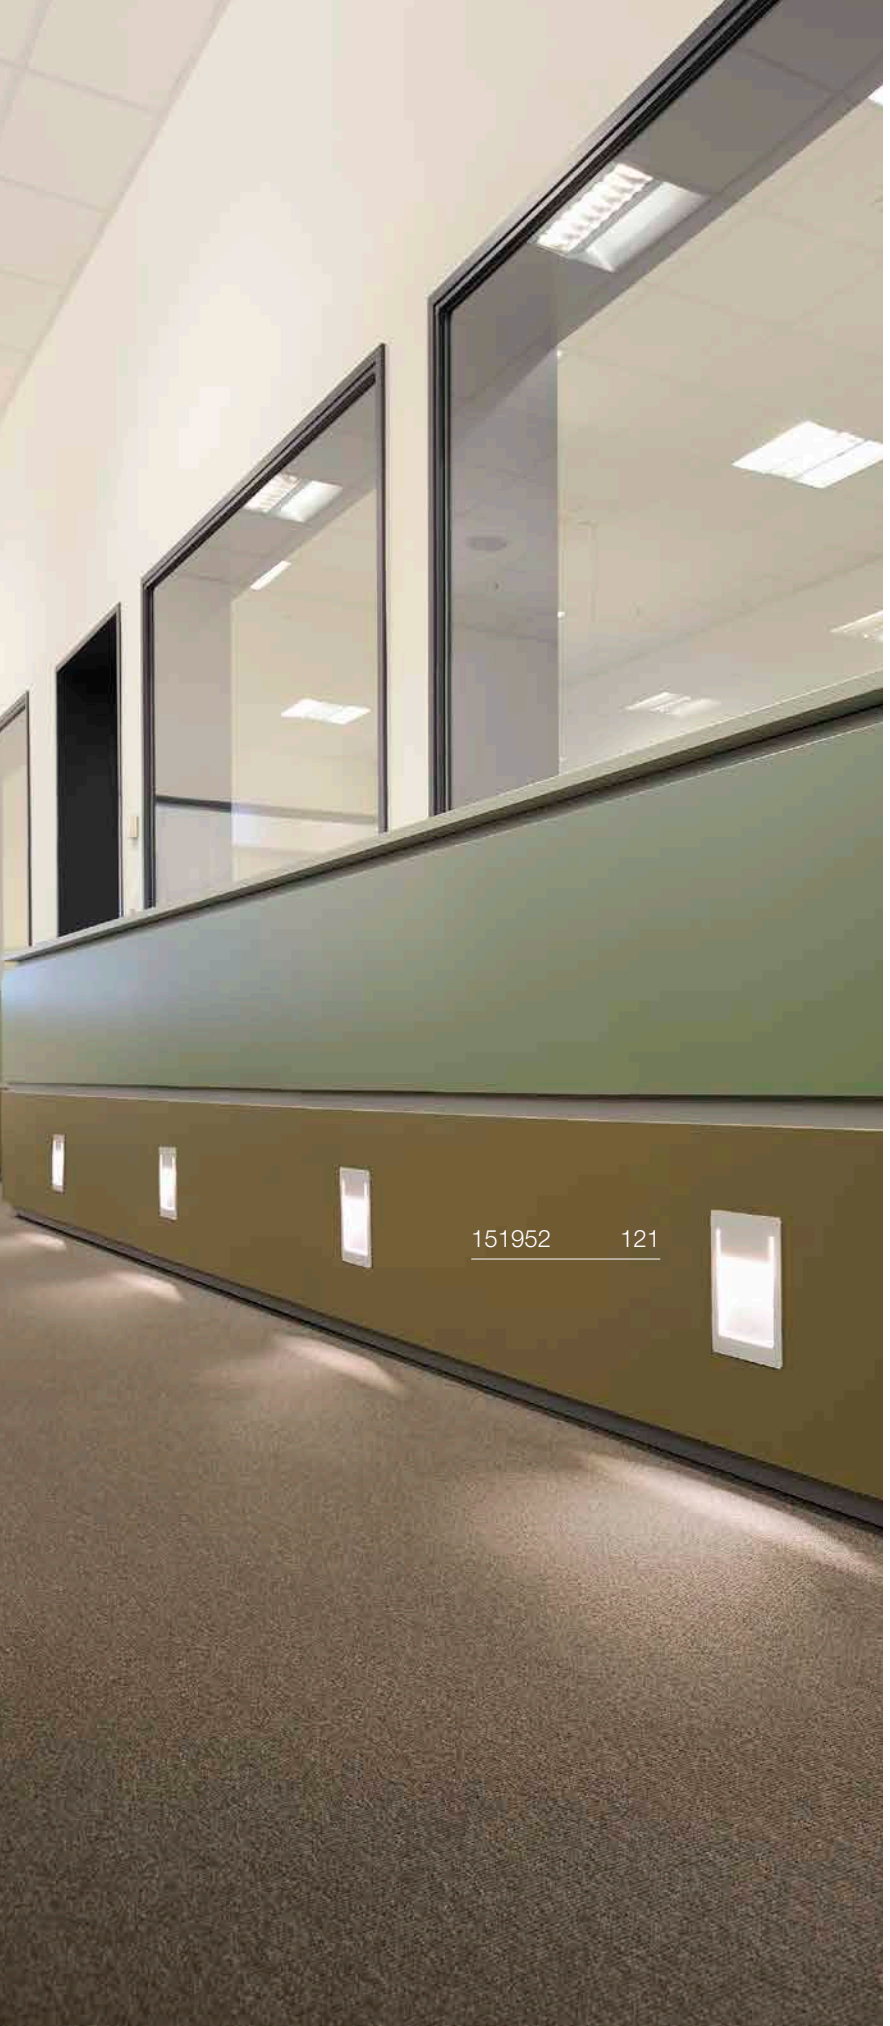

DOWNUNDER PUR 80
EL





IP20

350 mA
Power Consumption: 3.6 W
Material: Aluminium/Steel

- When connecting several lights, make sure they are connected in series!
- Leaf springs
- Low-voltage secondary socket

LED INSIDE CRI 80


Down	3000 K
	180 lm

Variant	Prod. no.	GBP
○ white	**151950**	**52.00**

Product	Prod. no.	GBP
Mounting frame		
● grey	**151960**	**9.00**
LED driver 4 W | 350 mA		
○ white	**1008656**	**17.00**

DOWNUNDER PUR 150
EL





IP20

500 mA
Power Consumption: 5.2 W
Material: Aluminium/Steel

- When connecting several lights, make sure they are connected in series!
- Leaf springs
- Low-voltage secondary socket

LED INSIDE CRI 80

	3000 K
Down	230 lm


Variant	Prod. no.	GBP
○ white	**151952**	**75.00**

⊕

Product	Prod. no.	GBP
Mounting frame		
● grey	**151962**	**12.00**
LED driver 20 W | 350 mA/500 mA Phase control dimmable including strain relief		
○ white	**1007227**	**36.00**
LED driver 25 W | 150-700 mA DALI dimmable including strain relief		
○ white	**1007229**	**62.00**

MOBALA
EL





IP20 30000 h L70B50

100-240 V ~50/60 Hz | 24 V
Power consumption: 1.3 W
Material: Aluminium

- The mounting frame (1002984) or wall box (1002983) are required for assembly.
- Leaf springs

LED INSIDE CRI 80

	3000 K
	14 lm


Variant	Prod. no.	GBP
○ white	**1002982**	**63.00**

⊕

Product	Prod. no.	GBP
MOBALA | wall box		
● black	**1002983**	**13.00**
MOBALA | mounting frame		
● black	**1002984**	**13.00**

WORO
EL





IP20 30000 h L70B50 35

350 mA
Power Consumption: 1.2 W
Material: Steel

- When connecting several lights, make sure they are connected in series!
- This item is suitable for installation in cavity walls and flush-mounted sockets for switches/sockets.
- Leaf springs
- Open cable end

LED INSIDE CRI 80

	3000 K
	50 lm


Variant	Prod. no.	GBP
○ white	**1002922**	**62.00**

⊕

Product	Prod. no.	GBP
LED driver 3W | 350mA		
○ white	**1005248**	**13.00**
LED driver 4 W | 350 mA		
○ white	**1008656**	**17.00**

PATTA-I
EL, ROUND, PHASE





C,L · IP20/IP65 · IK02 · 38° · 30000h L70B50

220-240 V ~50/60 Hz | 350 mA
Total Wattage: 7.3 W
Material: Aluminium/Glass

- Spring clips and leaf springs are included with the product


LED INSIDE · DIM TO WARM · CRI 95

1800 K	-	3000 K
44 lm	-	440 lm

Variant	Prod. no.	GBP
● black 44 lm	**1002098**	**74.00**
○ white 44 lm	**1002099**	**74.00**
● aluminium 440 lm	**1002100**	**78.00**

PATTA-I
DL, ANGULAR, PHASE





IP20 · 38° · 30000h L70B50

220-240 V ~50/60 Hz | 350 mA
Total Wattage: 7.3 W
Material: Aluminium/Glass

- Spring clips and leaf springs are included with the product


LED INSIDE · DIM TO WARM · CRI 95

1800 K	-	3000 K
44 lm	-	440 lm

Variant	Prod. no.	GBP
● black	**1002101**	**74.00**
○ white	**1002102**	**74.00**

PATTA-I
EL, ROUND, PHASE





C,L · IP20/IP65 · 38° · 40000h L70B50

220-240 V ~50/60 Hz | 250 mA
Total Wattage: 10 W
Material: Aluminium/Glass

- Spring clips


LED INSIDE · CRI 90

3000 K
870 lm

Variant	Prod. no.	GBP
● black	**114420**	**74.00**
○ white	**114421**	**74.00**
● aluminium	**114426**	**78.00**

PATTA-I
EL, SQUARE, PHASE





C,L · IP20/IP65 · 38° · 40000 h L70B50

220-240 V ~50/60 Hz | 250 mA
Total Wattage: 10 W
Material: Aluminium/Glass

- Spring clips


LED INSIDE · CRI 90

	3000 K
	870 lm

Variant	Prod. no.	GBP
● black	**114430**	**74.00**
○ white	**114431**	**74.00**
◍ aluminium	**114436**	**78.00**

PATTA-F
EL, ROUND, PHASE





C,L · IP20/IP65 · IK02 · 38° · 40000 h L70B50

220-240 V ~50/60 Hz | 250 mA
Total Wattage: 11 W
Material: Aluminium/Glass

- Spring clips


LED INSIDE · CRI 80

	3000 K
114440	745 lm
	3000 K
114441	860 lm

Variant	Prod. no.	GBP
● black 745 lm	**114440**	**84.00**
○ white 860 lm	**114441**	**84.00**

PATTA-F
EL, SQUARE, PHASE





C,L · IP20/IP65 · IK02 · 38° · 40000 h L70B50

220-240 V ~50/60 Hz | 250 mA
Total Wattage: 11 W
Material: Aluminium/Glass

- Spring clips

LED INSIDE · CRI 80

	3000 K
114450	745 lm
	3000 K
114451	860 lm

Variant	Prod. no.	GBP
● black 745 lm	**114450**	**84.00**
○ white 860 lm	**114451**	**84.00**

SYMBOLS KEY

Recommendations
Displays accessories and recommended light bulbs for the chosen products

Mix & Match
Indicates products that can be combined

Energy efficiency class
"This light is suitable for bulbs with an energy efficiency rating of ..."

Protection classes
- Protection class I / Protective conductor
- Protection class II/ Protection by double or reinforced insulation
- Protection class III/ Protection by extra-low voltage

Dimmable with:
- **C** = Trailing-edge phase dimmer
- **L** = Leading-edge phase dimmer
- **Uni** = Universal dimmer
- **1–10 V**
- **Dali** = DALI bus system
- **Switch** = Switch/button or touch control on the light
- **Touch** = Simple, stepless operation; responds to touch

IP protection rating:
Indicates the suitability of electrical equipment for different environmental conditions.

IK impact resistance rating:
The IK impact resistance rating is a measure of the resistance of housings for electrical equipment to mechanical stress, especially impact stress.

Half-diffusion angle:
Describes the beam angle in degrees. The smaller the angle, the more concentrated the light will be.

Rotation and pivoting capacity in degrees:
- Rotation range
- Pivot range
- Gimballed

Preservation of luminous flux:
Describes the amount by which the luminous flux of an LED decreases during a specified period.

Unified Glare Rating:
The lower the UGR value, the lower the psychological glare.

Pendant cable length
in cm

Cable length:
Mains plugs, connectors and supply cables (with open cable end) in cm

Through-wiring possible

Shape of the installation opening

Specification of the installation depth

Drive-over capability of the product ensured

Weight-bearing capacity of the product up to the specified value in tonnes. Measurements based on installation in concrete.

Sea-air resistant coating

Independent converter:
Control equipment also for use outside of lights

Short-circuit protected safety control equipment

Light colour temperature in Kelvin (K)

Luminous flux in lumens (lm)

Dark Sky
Indicates that the light emits almost no light into the upper half-space (ULOR < 2 %). Reduces light pollution and ensures targeted, needs-based illumination of the usable area.

Primary/Replica
Indicates lights with integrated primary/replica function. A sensor light (primary) controls downstream lights (replica) via a switched phase, enabling simple, networked lighting control without additional bus or control systems.

Connected lighting:
Indicates smart products that use the following protocols:
- Zigbee®
- DALI
- Bluetooth

Allows the installation of electrical control equipment on materials whose flammability is not known.

CCT switch:
By means of an integrated CCT switch, the light colour can be changed from 2700 K, 3000 K, 4000 K to 6500 K during installation.

Dim-to-warm:
With dimmers, the light colour can be altered from cold white to warm white.

Indicates lights with RGB+W and RGB
(Red-Green-Blue + White and Red-Green-Blue)

Indicates lights with motion sensors
(Microwaves (MR) - Technology / Infrared / Radio)

Products with integrated LEDs

Products with light socket

KS Licht – Your lighting wholesaler in Essen

Contact, customer service and information for customers
BIG WHITE 2027

Directly linked to our product range, advice and project services:

In the KS Multi Brand Business online shop, you will find the latest products, new releases and special offers, as well as information to support you with advice, quotations and project management:

- Online stock availability check
- Catalogues, browsable catalogues and product links
- Technical data, tender specifications, light distribution curves and LDT files
- Easily find and order spare parts
- View your individual terms and conditions, delivery and payment terms
- Relevant product recommendations, variants and alternative products
- Direct contact with our sales team

Customer Information

All prices are net, plus statutory VAT. The retail prices quoted are recommended retail prices. Upon publication of this catalogue, previous price lists cease to be valid.
Illustrations, colours, shapes, designs and technical specifications are for illustrative purposes only and are not binding. Subject to changes and errors.
Goods are generally dispatched ex works, carriage forward.
For orders with a net value of less than €70.00, a minimum order surcharge of €8.00 will be applied.

Ordering & Delivery

When placing orders, please always specify the item number, colour and quantity. This reduces the need for follow-up enquiries and speeds up processing.
Express and direct deliveries are available on request.
Custom-made items, components assembled to the customer's specifications and lamps are excluded from exchange.
Our General Terms and Conditions apply and are available at www.ks-germany.com/de/agb.

Kontakt

KS Licht- und Elektrotechnik GmbH
Manderscheidtstraße 8 c
45141 Essen
Germany

Verkauf & Service
Tel.: +49 (0)201-89924-0
verkauf@ks-germany.com

Online
ks-light.co.uk
www.ks-germany.com

Pflichtangaben

KS Licht- und Elektrotechnik GmbH · Sitz der Gesellschaft: Essen · Geschäftsführer: Kai Becker
Registergericht: Amtsgericht Essen · Handelsregister: HRB 12736 · Steuer-Nr.: 111/5708/2689 ·
USt-IdNr.: DE190673411

KS Licht- und Elektrotechnik GmbH
Manderscheidtstraße 8 c
45141 Essen
Germany

Tel.: +49 (0)201-89924-0

B2B-Shop: **ks-light.co.uk**
Website: www.ks-germany.com
E-Mail: verkauf@ks-germany.com

Opening hours
Monday – Thursday 08:00 – 16:30
Friday 08:00 – 15:00