BIG WHITE®
2027

SLV LIGHTING CATALOGUE



WALL AND CEILING LIGHTS

INDOOR | WALL AND CEILING LIGHTS



QUIMERA | 279



LYGANT | 279



SUN MIRROR | 281



MIX match

VARYT | 285



SUN | 286–287



DYSKO | 289



NUMINOS® | 290–297

NEW

MEDO® 2 SLIM | 298–301



NEW

MEDO® HYVE | 302–303



MEDO® PRO | 304–309



ONE | 310–311



ONE LINEAR | 312–313



ONE | 313



TRUKKO | 314–315



SEDO | 316–317



ARLINA | 317



WL | 318–319



MIBO UP/DOWN | 319



MAGANDA | 319



DORISA | 320

NEW

GLENOS® 2.0 | 320

Q-LINE® | 321

L-LINE 60 | 321



PANTILO ROPE | 322



ENOLA® 2.0 | 324–327



NEW

GRIP! | 328–329



NEW

GRIP! FLAT | 329




ASTO TUBE | 331



MANA | 333–335



OCULUS |



PLASTRA | 338–339



PLASTRA | 340



PLASTRA | 340



PLASTRA 101 | 341

PLASTRA | 341

PLASTRA 104 | 341



WUD | 343



LOGS IN | 344–345



QUAD FRAME | 346

WL 149 | 347



SHELL 30 | 347



ASSO 300 | 348–349



OSSA7 349



CARISO | 351

CHROMBO | 351

DIRETO 60 | 353



DENA 30 | 353

BASKET | 353



FITU | 354



THEO UP/DOWN | 354



SOLID CUBE | 354



FENDA | 355



KENKUA SPOT | 355



COUPA | 356



KARPO MAGN | 356



KARPO GOOSE | 356



KARPO 30 | 357



KARPO | 357



SOMNILA SPOT | 358



SOMNILA FLEX | 358–359



DIO FLEX PLATE | 359



PHELIA | 361



MERADO FLOOD | 361



DISPLAY ADL 50 | 361



PURI 2.0 TUBE | 362–363



SOCKET

PURI 2.0 CONE | 364–365



SOCKET

PURI 2.0 DOME | 366–367



LED

NOBLO® | 371–373



LED

KALU 2.0 | 374



SOCKET

PANTILO ROPE | 375

NEW



SOCKET

MOTUNA | 375



LED

CYFT | 376–379



SOCKET

ASTO TUBE | 381



SOCKET

KALU | 383



SOCKET

KALU | 383



SOCKET

ALTRA DICE | 385



SOCKET

SPOT 79 | 385

NEW



LED

SENSER 2.0 | 386–389

NEW



LED

LIPSY® 2.0 | 390–393

LED

SIMA | 394



SOCKET

MELAN | 395



LED


BATTEN | 395


1008036 279

QUIMERA
WL, PHASE

GERMAN DESIGN AWARD WINNER 2025





C IP20 IK03 350° 50000h L80B50

220-240 V ~50/60 Hz | 700 mA
Total wattage: 8.5 W
Material: aluminium


LED INSIDE CCT CRI 90

2700 K	3000 K
330 lm	350 lm

Variant	Prod. no.	GBP
brass	1008036	310.00
dark bronze	1008035	310.00
dark copper	1008037	310.00

LYGANT
WL, SINGLE





IP44 30000h L70B50

220-240 V ~50/60 Hz | 700 mA
Total wattage: 8 W
Material: aluminium


LED INSIDE CRI 90

3000 K
560 lm

Variant	Prod. no.	GBP
black	1007614	218.00
brass	1007612	243.00
chrome	1007615	243.00

LYGANT
WL, DOUBLE





IP44 30000h L70B50

220-240 V ~50/60 Hz | 500 mA
Total wattage: 11 W
Material: aluminium

LED INSIDE CRI 90


3000 K
800 lm

Variant	Prod. no.	GBP
black	1007618	310.00
brass	1007616	336.00
chrome	1007619	336.00


1010194 281

SUN MIRROR
WL, QUAD





IP44 IK02 50000h L70B50

220-240 V ~50/60 Hz | 600 mA
Total wattage: 18 W
Material: steel


LED INSIDE CCT CRI 90

2700 K	3000 K	4000 K
1200 lm	1300 lm	1400 lm

Variant	Prod. no.	GBP
● black	**1010193**	**239.00**

SUN MIRROR
WL, TRIPLE





IP44 IK02 50000h L70B50

220-240 V ~50/60 Hz | 450 mA
Total wattage: 13 W
Material: steel

LED INSIDE CCT CRI 90

2700 K	3000 K	4000 K
900 lm	950 lm	1000 lm

Variant	Prod. no.	GBP
● black	**1010194**	**205.00**

MIX & MATCH VARYT

The modular components of the VARYT range can be combined flexibly to create a wide variety of configurations.

A wide selection of lampshades and light bases enables bespoke lighting solutions for a broad range of applications.

VARYT PD

- ● *1008114*
- ○ *1008115*
- *1008117*
- *1008116*
- *1008118*

VARYT CL


- ● *1008099*
- ○ *1008100*
- *1008102*
- *1008101*
- *1008103*


VARYT WL

- ● *1008104*
- ○ *1008105*
- *1008107*
- *1008106*
- *1008108*

VARYT TL


- ● *1008109*
- ○ *1008110*
- *1008112*
- *1008111*
- *1008113*

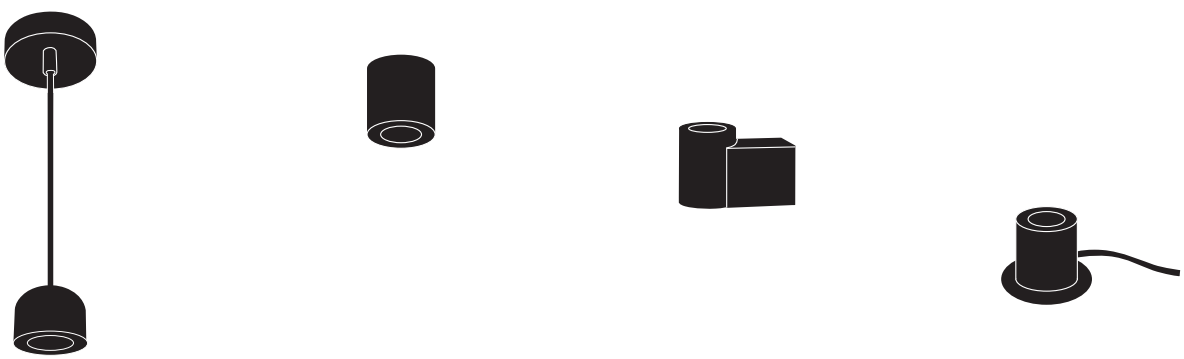




VARYT KUGEL Ø12

○ *1008119*




VARYT LINIE Ø12

○ *1007859*





VARYT PLISSEE Ø11.5

○ *1007860*




IP44

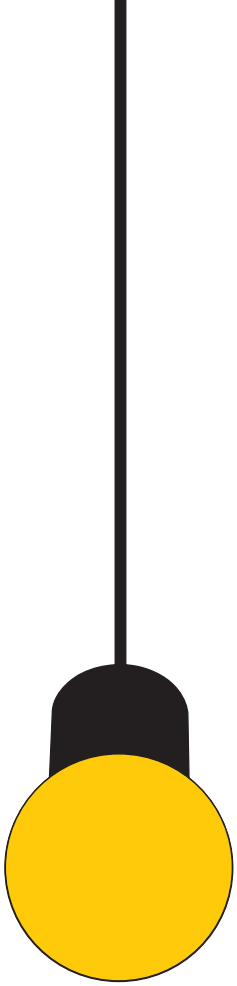

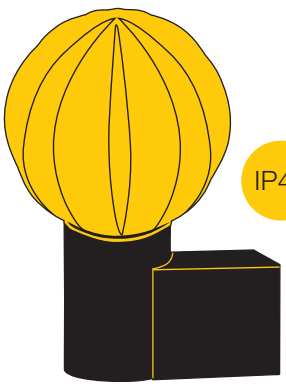

IP44

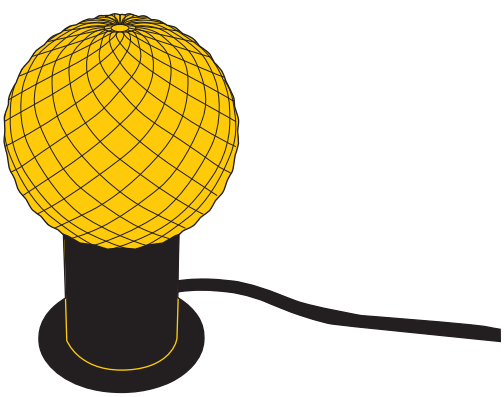



VARYT DIAMONT Ø11

- *1007858*
- *1008023*


All SLV Mix & Match products are identified by the corresponding symbol.

MIX match



VARYT
WL, E14





IP44 IK02

220-240 V ~50/60 Hz
Material: steel

• IP44 in combination with one of the shades

SOCKET INSIDE 6 W

Base: 1 × E14 | max. Ø: 11 cm | L: 3.8 cm

Variant	Prod. no.	GBP
● black	1008104	78.00
○ white	1008105	78.00
● brass	1008107	105.00
◑ chrome	1008106	88.00
● copper	1008108	105.00

E14 | 4 W | 320°
380 lm | 2700 K | EEC = F

C,L

Prod. no.: 1005284 6.00 GBP

VARYT
KUGEL GLASS SHADE



IK02

Ø: 12 cm
H: 12.8 cm
Material: glass

Variant	Prod. no.	GBP
○ white	1008119	52.00

VARYT
DIAMANT GLASS SHADE



IK02

Ø: 12 cm
H: 12.7 cm
Material: glass

Variant	Prod. no.	GBP
● smoky grey	1007858	69.00
● amber	1008023	69.00

VARYT
LINIE GLASS SHADE



IK02

Ø: 12 cm
H: 13 cm
Material: glass

Variant	Prod. no.	GBP
○ white	1007859	61.00


VARYT
PLISSEE GLASS SHADE



IK02

Ø: 11.5 cm
H: 13.5 cm
Material: glass


Variant	Prod. no.	GBP
○ white	1007860	66.00

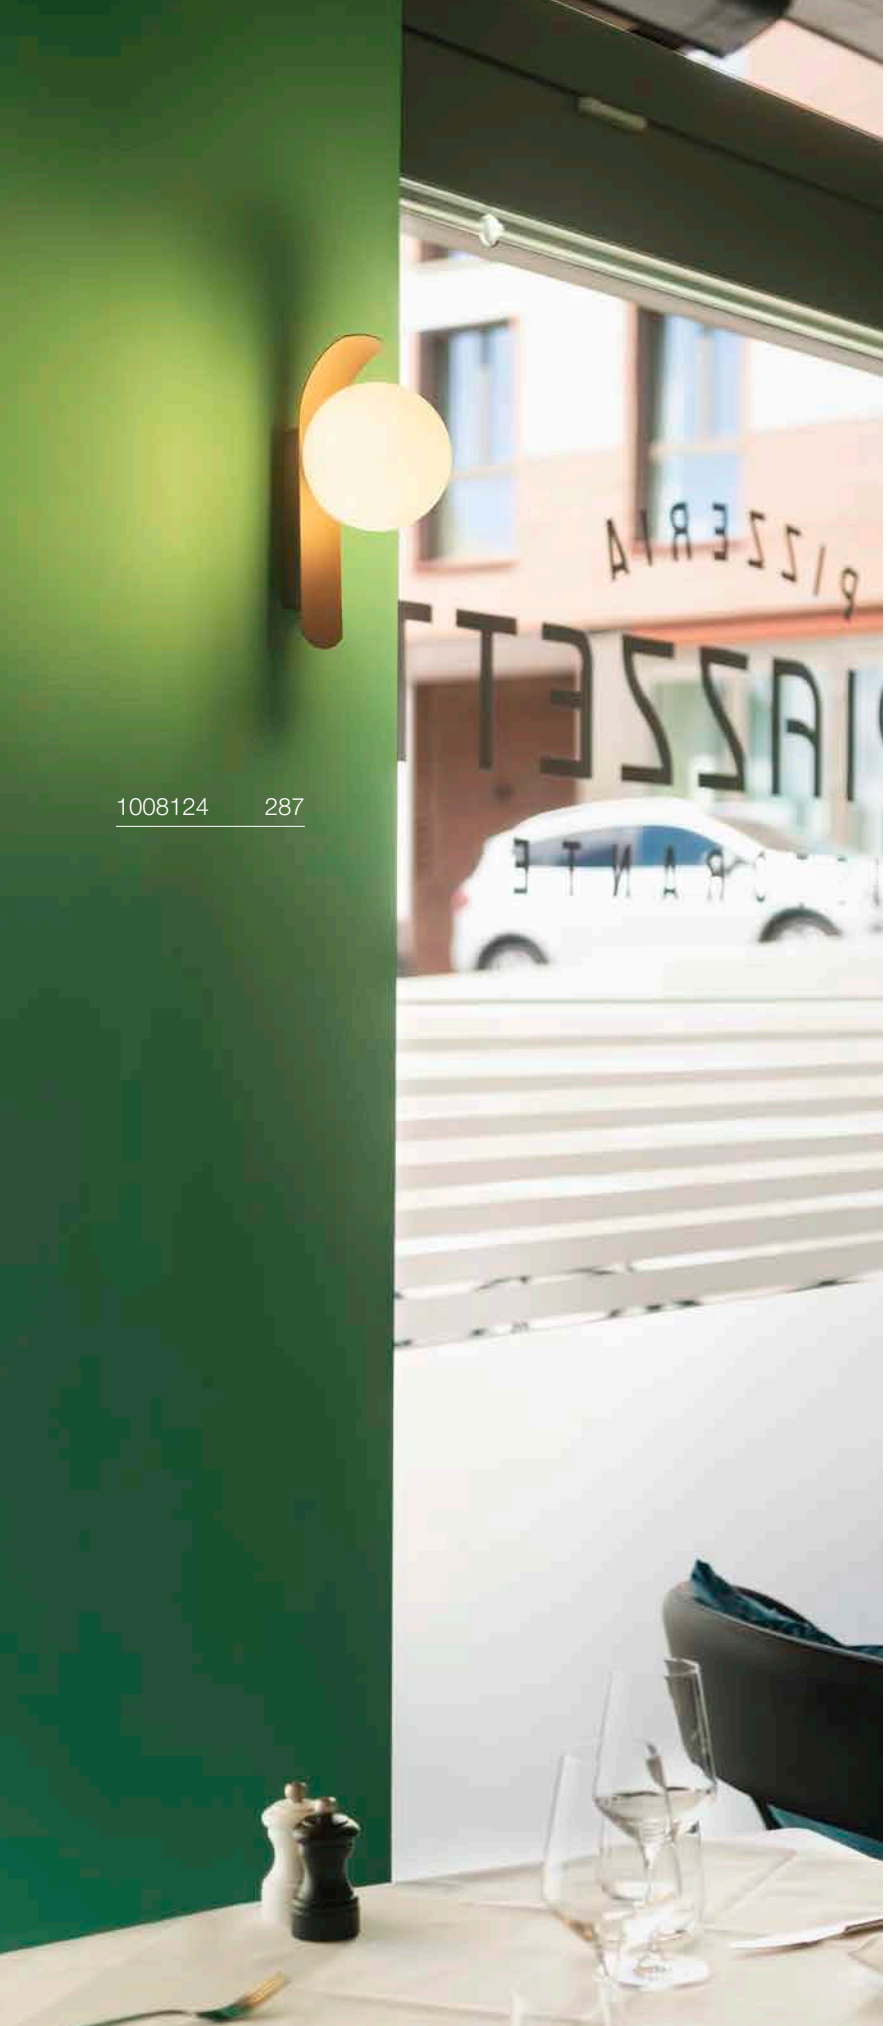

1008124 287

SUN
WL, G9, ANGULAR





IP20 IK02

220-240 V ~50/60 Hz
Material: steel

SOCKET INSIDE 40 W

Base: 1 × G69 max. Ø: 1.9 cm | L: 6 cm


Variant	Prod. no.	GBP
● black	**1008123**	**96.00**

G9 | 4 W | 300°
450 lm | 2700 K | EEC = E

Prod. no.: **1007455** **8.00 GBP**

SUN
WL, G9, CURVED





IP20 IK02

220-240 V ~50/60 Hz
Material: steel

SOCKET INSIDE 40 W

Base: 1 × G69 | max. Ø: 1.9 cm | L: 6 cm


Variant	Prod. no.	GBP
● black	**1008124**	**96.00**

G9 | 4 W | 300°
450 lm | 2700 K | EEC = E

Prod. no.: 1007455 8.00 GBP

SUN
WL, UP, G9, ANGULAR





IP20 IK02

220-240 V ~50/60 Hz
Material: steel

SOCKET INSIDE 5 W

Base: 1 × G69 | max. Ø: 1.9 cm | L: 6 cm


Variant	Prod. no.	GBP
● black	**1009144**	**96.00**

G9 | 4 W | 300°
400 lm | 3000 K | EEC = E

Prod. no.: 1005286 8.00 GBP

SUN
WL, DOUBLE, G9, ANGULAR





IP20 IK02

220-240 V ~50/60 Hz
Material: steel

SOCKET INSIDE 5 W

Base: 1 × G69 | max. Ø: 1.9 cm | L: 6 cm

Variant	Prod. no.	GBP
● black	**1009145**	**113.00**

G9 | 4 W | 300°
400 lm | 3000 K | EEC = E


Prod. no.: 1005286 8.00 GBP



1010306 289

DYSKO
CW, SINGLE, PHASE









220-240 V ~50/60 Hz | 150 mA
Total wattage: 6.7 W
Material: aluminium




	2700 K
	750 lm

Variant	Prod. no.	GBP
black/gold	1010300	127.00
black/black	1010302	130.00
white/black	1010301	127.00

DYSKO
CW, DOUBLE, PHASE









220-240 V ~50/60 Hz | 150 mA
Total wattage: 13 W
Material: aluminium




Spot 1	2700 K	
	750 lm	
Spot 2	2700 K	
	750 lm	

Variant	Prod. no.	GBP
black/gold	1010306	229.00
black/black	1010308	231.00
white/black	1010307	229.00

DYSKO
CW, SWITCH, SINGLE, PHASE











220-240 V ~50/60 Hz | 150 mA
Total wattage: 6.7 W
Material: aluminium

- incl. on/off switch





	2700 K
	750 lm

Variant	Prod. no.	GBP
black/gold	1010312	132.00
white/black	1010313	132.00


NUMINOS® S
CW







● black



○ white



220-240 V ~50/60 Hz | 200 mA
Total wattage: 8 W
Material: aluminium/PC

Variant	GBP
All S versions	**100.00**
All DALI S versions	**142.00**

Please note: decorative ring also available in white, gold and copper




⊕


Product	Prod. no.	GBP
Front ring S		
○ white	**1006167**	**2.00**
● copper	**1008140**	**8.00**
● gold	**1008144**	**8.00**

					Prod. no.	
C	2700 K	950 lm	24°	16	**1004098**	
			36°	16	**1004099**	
			60°	19	**1004100**	
	3000 K	1050 lm	24°	16	**1004106**	
			36°	16	**1004107**	
			60°	19	**1004108**	
	4000 K	1100 lm	24°	16	**1004114**	
			36°	16	**1004115**	
			60°	19	**1004116**	
Dali Touch	2700 K	950 lm	24°	16	**1004386**	
			36°	16	**1004387**	
			60°	19	**1004388**	
	3000 K	1050 lm	24°	16	**1004394**	
			36°	16	**1004395**	
			60°	19	**1004396**	
	4000 K	1100 lm	24°	16	**1004402**	
			36°	16	**1004403**	
			60°	19	**1004404**	
C	2700 K	950 lm	24°	16	**1004102**	
			36°	16	**1004103**	
			60°	19	**1004104**	
	3000 K	1050 lm	24°	16	**1004110**	
			36°	16	**1004111**	
			60°	19	**1004112**	
	4000 K	1100 lm	24°	16	**1004118**	
			36°	16	**1004119**	
			60°	19	**1004120**	
Dali Touch	2700 K	950 lm	24°	16	**1004390**	
			36°	16	**1004391**	
			60°	19	**1004392**	
	3000 K	1050 lm	24°	16	**1004398**	
			36°	16	**1004399**	
			60°	19	**1004400**	
	4000 K	1100 lm	24°	16	**1004406**	
			36°	16	**1004407**	
			60°	19	**1004408**	

NUMINOS® M
CL








● black

IP20 350° 90° 50000h L90B10 78

INSIDE CRI 90

220-240 V ~50/60 Hz | 350 mA
Total wattage: 14 W
Material: aluminium/PC



○ white

Variant	GBP
All M versions	**126.00**
All DALI M versions	**172.00**

Please note: decorative ring also available in white, gold and copper




⊕


Product	Prod. no.	GBP
Front ring M		
○ white	**1006168**	**3.00**
● copper	**1008141**	**8.00**
● gold	**1008145**	**8.00**

					Prod. no.	
C	2700 K	1750 lm	24°	16	**1004194**	
			36°	16	**1004195**	
			60°	22	**1004196**	
	3000 K	1800 lm	24°	16	**1004202**	
			36°	16	**1004203**	
			60°	22	**1004204**	
	4000 K	1950 lm	24°	16	**1004210**	
			36°	16	**1004211**	
			60°	22	**1004212**	
Dali Touch	2700 K	1750 lm	24°	16	**1004482**	
			36°	16	**1004483**	
			60°	22	**1004484**	
	3000 K	1800 lm	24°	16	**1004490**	
			36°	16	**1004491**	
			60°	22	**1004492**	
	4000 K	1950 lm	24°	16	**1004498**	
			36°	16	**1004499**	
			60°	22	**1004500**	
C	2700 K	1750 lm	24°	16	**1004198**	
			36°	16	**1004199**	
			60°	22	**1004200**	
	3000 K	1800 lm	24°	16	**1004206**	
			36°	16	**1004207**	
			60°	22	**1004208**	
	4000 K	1950 lm	24°	16	**1004214**	
			36°	16	**1004215**	
			60°	22	**1004216**	
Dali Touch	2700 K	1750 lm	24°	16	**1004486**	
			36°	16	**1004487**	
			60°	22	**1004488**	
	3000 K	1800 lm	24°	16	**1004494**	
			36°	16	**1004495**	
			60°	22	**1004496**	
	4000 K	1950 lm	24°	16	**1004502**	
			36°	16	**1004503**	
			60°	22	**1004504**	


NUMINOS® L
CL







● black



○ white

IP20 350° 90° 50000h L90B10 78

INSIDE CRI 90

220-240 V ~50/60 Hz | 500 mA
Total wattage: 20 W
Material: aluminium/PC

Variant	GBP
All L versions	**134.00**
All DALI L versions	**184.00**

Please note: decorative ring also available in white, gold and copper





Product	Prod. no.	GBP
Front ring L		
○ white	**1006169**	**3.00**
● copper	**1008142**	**10.00**
● gold	**1008146**	**10.00**

					Prod. no.	
C	2700 K	2300 lm	24°	16	**1004290**	
			36°	16	**1004291**	
			60°	19	**1004292**	
	3000 K	2400 lm	24°	16	**1004298**	
			36°	16	**1004299**	
			60°	19	**1004300**	
	4000 K	2600 lm	24°	16	**1004306**	
			36°	16	**1004307**	
			60°	19	**1004308**	
Dali Touch	2700 K	2300 lm	24°	16	**1004578**	
			36°	16	**1004579**	
			60°	19	**1004580**	
	3000 K	2400 lm	24°	16	**1004586**	
			36°	16	**1004587**	
			60°	19	**1004588**	
	4000 K	2600 lm	24°	16	**1004594**	
			36°	16	**1004595**	
			60°	19	**1004596**	
C	2700 K	2300 lm	24°	16	**1004294**	
			36°	16	**1004295**	
			60°	19	**1004296**	
	3000 K	2400 lm	24°	16	**1004302**	
			36°	16	**1004303**	
			60°	19	**1004304**	
	4000 K	2600 lm	24°	16	**1004310**	
			36°	16	**1004311**	
			60°	19	**1004312**	
Dali Touch	2700 K	2300 lm	24°	16	**1004582**	
			36°	16	**1004583**	
			60°	19	**1004584**	
	3000 K	2400 lm	24°	16	**1004590**	
			36°	16	**1004591**	
			60°	19	**1004592**	
	4000 K	2600 lm	24°	16	**1004598**	
			36°	16	**1004599**	
			60°	19	**1004600**	


NUMINOS® XL
CL







● black



○ white

IP20 350° 90° 50000h L90B10 58

INSIDE CRI 90

220-240 V ~50/60 Hz | 700 mA
Total wattage: 27 W
Material: aluminium/PC

Variant	GBP
All XL versions	**142.00**
All DALI XL versions	**201.00**

Please note: decorative ring also available in white, gold and copper




Product	Prod. no.	GBP
Front ring XL		
○ white	**1006170**	**4.00**
● copper	**1008143**	**10.00**
● gold	**1008147**	**10.00**

					Prod. no.	
Dali Touch	2700 K	3550 lm	24°	16	**1005741**	
			36°	16	**1005742**	
		3150 lm	60°	22	**1005743**	
	3000 K	3550 lm	24°	16	**1005747**	
			36°	16	**1005748**	
		3150 lm	60°	22	**1005749**	
	4000 K	3900 lm	24°	16	**1005753**	
			36°	16	**1005754**	
		3500 lm	60°	22	**1005755**	
C	2700 K	3550 lm	24°	16	**1006083**	
			36°	16	**1006084**	
		3150 lm	60°	22	**1006085**	
	3000 K	3550 lm	24°	16	**1006089**	
			36°	16	**1006090**	
		3150 lm	60°	22	**1006091**	
	4000 K	3900 lm	24°	16	**1006095**	
			36°	16	**1006096**	
		3500 lm	60°	22	**1006097**	
Dali Touch	2700 K	3550 lm	24°	16	**1005744**	
			36°	16	**1005745**	
		3150 lm	60°	22	**1005746**	
	3000 K	3550 lm	24°	16	**1005750**	
			36°	16	**1005751**	
		3150 lm	60°	22	**1005752**	
	4000 K	3900 lm	24°	16	**1005756**	
			36°	16	**1005757**	
		3500 lm	60°	22	**1005758**	
C	2700 K	3550 lm	24°	16	**1006086**	
			36°	16	**1006087**	
		3150 lm	60°	22	**1006088**	
	3000 K	3550 lm	24°	16	**1006092**	
			36°	16	**1006093**	
		3150 lm	60°	22	**1006094**	
	4000 K	3900 lm	24°	16	**1006098**	
			36°	16	**1006099**	
		3500 lm	60°	22	**1006100**	



MEDO® 2.0 SLIM 30
CL, PHASE

NEW



220-240 V ~50/60 Hz | 200 mA
Total wattage: 8 W
Material: aluminium/steel

	3000 K	4000 K
Down	1000 lm	1000 lm

Variant	Prod. no.	GBP
● black	**1011693**	**201.00**
○ white	**1011694**	**201.00**

Product	Prod. no.	GBP
1.5 m central suspension kit		
● black	**1011779**	**52.00**
○ white	**1011780**	**52.00**
5 m central suspension kit		
● black	**1011781**	**92.00**
○ white	**1011782**	**92.00**
3 m parallel suspension set		
● black	**1011783**	**78.00**
○ white	**1011784**	**78.00**

MEDO® 2.0 SLIM 40
CL, PHASE




220-240 V ~50/60 Hz | 400 mA
Total wattage: 15.5 W
Material: aluminium/steel

Down	3000 K	4000 K
	1900 lm	1900 lm

Variant	Prod. no.	GBP
● black	1011695	239.00
○ white	1011696	239.00

Product	Prod. no.	GBP
1.5 m central suspension kit		
● black	1011779	52.00
○ white	1011780	52.00
5 m central suspension kit		
● black	1011781	92.00
○ white	1011782	92.00
3 m parallel suspension set		
● black	1011783	78.00
○ white	1011784	78.00

MEDO® 2.0 SLIM 60
CL, PHASE

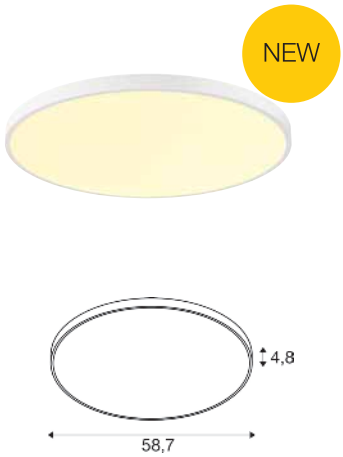

220-240 V ~50/60 Hz | 900 mA
Total wattage: 35 W
Material: aluminium/steel

Down	3000 K	4000 K
	4200 lm	4200 lm

Variant	Prod. no.	GBP
● black	1011697	394.00
○ white	1011698	394.00

Product	Prod. no.	GBP
1.5 m central suspension kit		
● black	1011779	52.00
○ white	1011780	52.00
5 m central suspension kit		
● black	1011781	92.00
○ white	1011782	92.00
3 m parallel suspension set		
● black	1011783	78.00
○ white	1011784	78.00

MEDO® 2.0 SLIM 80
CL, PHASE



220-240 V ~50/60 Hz | 1200 mA
Total wattage: 45 W
Material: aluminium/steel


Down	3000 K	4000 K
	5900 lm	5900 lm

Variant	Prod. no.	GBP
● black	1011699	579.00
○ white	1011700	579.00

Product	Prod. no.	GBP
1.5 m central suspension kit		
● black	1011779	52.00
○ white	1011780	52.00
5 m central suspension kit		
● black	1011781	92.00
○ white	1011782	92.00
3 m parallel suspension set		
● black	1011783	78.00
○ white	1011784	78.00

MEDO® 2.0 SLIM 30
CL, DALI





Dali Touch IP20 IK03 85° 100 000 h L80B10 UGR 19

220-240 V ~0/50/60 Hz | 200 mA
Total wattage: 8.6 W
Material: aluminium/steel

LED INSIDE CCT CRI 90

Down	3000 K	4000 K
	1000 lm	1000 lm


Variant	Prod. no.	GBP
● black	1011701	243.00
○ white	1011702	243.00

⊕

Product	Prod. no.	GBP
1.5 m central suspension kit		
● black	1011779	52.00
○ white	1011780	52.00
5 m central suspension kit		
● black	1011781	92.00
○ white	1011782	92.00
3 m parallel suspension set		
● black	1011783	78.00
○ white	1011784	78.00

MEDO® 2.0 SLIM 40
CL, DALI





Dali Touch IP20 IK03 85° 100 000 h L80B10 UGR 19

220-240 V ~0/50/60 Hz | 400 mA
Total wattage: 15.5 W
Material: aluminium/steel

LED INSIDE CCT CRI 90

Down	3000 K	4000 K
	1900 lm	1900 lm


Variant	Prod. no.	GBP
● black	1011703	268.00
○ white	1011704	268.00

⊕

Product	Prod. no.	GBP
1.5 m central suspension kit		
● black	1011779	52.00
○ white	1011780	52.00
5 m central suspension kit		
● black	1011781	92.00
○ white	1011782	92.00
3 m parallel suspension set		
● black	1011783	78.00
○ white	1011784	78.00

MEDO® 2.0 SLIM 60
CL, DALI





Dali Touch IP20 IK03 85° 100 000 h L80B10 UGR 19

220-240 V ~0/50/60 Hz | 900 mA
Total wattage: 34 W
Material: aluminium/steel

LED INSIDE CCT CRI 90

Down	3000 K	4000 K
	4200 lm	4200 lm

Variant	Prod. no.	GBP
● black	1011705	420.00
○ white	1011706	420.00


⊕

Product	Prod. no.	GBP
1.5 m central suspension kit		
● black	1011779	52.00
○ white	1011780	52.00
5 m central suspension kit		
● black	1011781	92.00
○ white	1011782	92.00
3 m parallel suspension set		
● black	1011783	78.00
○ white	1011784	78.00

MEDO® 2.0 SLIM 80
CL, DALI

NEW





Dali | Touch | IP20 | IK03 | 85° | 100 000 h L80B10 | UGR 19

200-240 V ~0/50/60 Hz | 1200 mA
Total wattage: 45 W
Material: aluminium/steel

LED INSIDE | CCT | CRI 90

Down	3000 K	4000 K
	5900 lm	5900 lm

Variant	Prod. no.	GBP
● black	1011707	604.00
○ white	1011708	604.00

⊕

Product	Prod. no.	GBP
1.5 m central suspension kit		
● black	1011779	52.00
○ white	1011780	52.00
5 m central suspension kit		
● black	1011781	92.00
○ white	1011782	92.00
3 m parallel suspension set		
● black	1011783	78.00
○ white	1011784	78.00

MEDO® 2.0 SUSPENSION KIT
3 M PARALLEL SUSPENSION SET

NEW



IP20 | 300 cm

Ø: 8 cm
H: 3 cm
Material: steel

Variant	Prod. no.	GBP
● black	1011783	78.00
○ white	1011784	78.00

MEDO® 2.0 SUSPENSION KIT
1.5 M CENTRAL SUSPENSION KIT

NEW



IP20 | 150 cm

Ø: 13 cm
H: 3 cm
Material: steel

Variant	Prod. no.	GBP
● black	1011779	52.00
○ white	1011780	52.00

MEDO® 2.0 SUSPENSION KIT
5 M CENTRAL SUSPENSION KIT

NEW



IP20 | 500 cm

Ø: 13 cm
H: 3 cm
Material: steel

Variant	Prod. no.	GBP
● black	1011781	92.00
○ white	1011782	92.00

MEDO® 2.0 HYVE 40
CL, PHASE



220-240 V ~50/60 Hz | 400 mA
Total wattage: 16 W
Material: aluminium/steel


INSIDE CCT CRI 90

Down	3000 K	4000 K
	2100 lm	2100 lm

Variant	Prod. no.	GBP
● black	1011851	268.00
○ white	1011850	268.00

Product	Prod. no.	GBP
1.5 m central suspension kit		
● black	1011779	52.00
○ white	1011780	52.00
5 m central suspension kit		
● black	1011781	92.00
○ white	1011782	92.00
3 m parallel suspension set		
● black	1011783	78.00
○ white	1011784	78.00

MEDO® 2.0 HYVE 40
CL, DALI

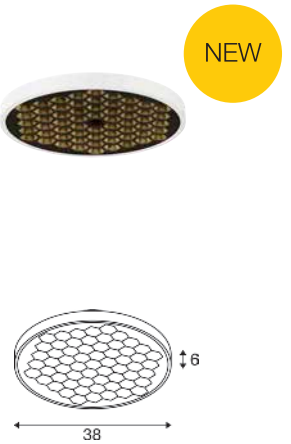

200-240 V ~0/50/60 Hz | 400 mA
Total wattage: 17 W
Material: aluminium/steel

INSIDE CCT CRI 90

Down	3000 K	4000 K
	2100 lm	2100 lm

Variant	Prod. no.	GBP
● black	1011853	302.00
○ white	1011852	302.00

Product	Prod. no.	GBP
1.5 m central suspension kit		
● black	1011779	52.00
○ white	1011780	52.00
5 m central suspension kit		
● black	1011781	92.00
○ white	1011782	92.00
3 m parallel suspension set		
● black	1011783	78.00
○ white	1011784	78.00

MEDO® 2.0 HYVE 60
CL, PHASE



220-240 V ~50/60 Hz | 900 mA
Total wattage: 35 W
Material: aluminium/steel

INSIDE CCT CRI 90

Down	3000 K	4000 K
	4800 lm	4800 lm

Variant	Prod. no.	GBP
● black	1011855	529.00
○ white	1011854	529.00

Product	Prod. no.	GBP
1.5 m central suspension kit		
● black	1011779	52.00
○ white	1011780	52.00
5 m central suspension kit		
● black	1011781	92.00
○ white	1011782	92.00
3 m parallel suspension set		
● black	1011783	78.00
○ white	1011784	78.00

MEDO® 2.0 HYVE 60
CL, DALI



200-240 V ~0/50/60 Hz | 900 mA
Total wattage: 33 W
Material: aluminium/steel

Down	3000 K	4000 K
	4800 lm	4800 lm

Variant	Prod. no.	GBP
● black	1011857	562.00
○ white	1011856	562.00

Product	Prod. no.	GBP
1.5 m central suspension kit		
● black	1011779	52.00
○ white	1011780	52.00
5 m central suspension kit		
● black	1011781	92.00
○ white	1011782	92.00
3 m parallel suspension set		
● black	1011783	78.00
○ white	1011784	78.00

MEDO® 2.0 HYVE 80
CL, PHASE



220-240 V ~50/60 Hz | 1800 mA
Total wattage: 70 W
Material: aluminium/steel

Down	3000 K	4000 K
	9700 lm	9700 lm

Variant	Prod. no.	GBP
● black	1011859	789.00
○ white	1011858	789.00

Product	Prod. no.	GBP
1.5 m central suspension kit		
● black	1011779	52.00
○ white	1011780	52.00
5 m central suspension kit		
● black	1011781	92.00
○ white	1011782	92.00
3 m parallel suspension set		
● black	1011783	78.00
○ white	1011784	78.00

MEDO® 2.0 HYVE 80
CL, DALI



200-240 V ~0/50/60 Hz | 1800 mA
Total wattage: 67 W
Material: aluminium/steel

Down	3000 K	4000 K
	9700 lm	9700 lm


Variant	Prod. no.	GBP
● black	1011861	823.00
○ white	1011860	823.00

Product	Prod. no.	GBP
1.5 m central suspension kit		
● black	1011779	52.00
○ white	1011780	52.00
5 m central suspension kit		
● black	1011781	92.00
○ white	1011782	92.00
3 m parallel suspension set		
● black	1011783	78.00
○ white	1011784	78.00



MEDO® PRO 30
CW, DALI, UGR<19







220-240 V ~50/60 Hz | 250 mA
Total wattage: 10 W
Material: aluminium/steel



	3000 K	4000 K
Direct	1150 lm	1150 lm
Indirect	100 lm	100 lm


Variant	Prod. no.	GBP
● black	**1007284**	**285.00**
○ white	**1007285**	**285.00**

⊕

Product	Prod. no.	GBP
1.5 m suspension kit		
● black	**135250**	**40.00**
○ white	**135251**	**40.00**
5 m suspension kit		
○ white	**1001950**	**88.00**
● black	**1001952**	**88.00**

MEDO® PRO 30
CW, PHASE, UGR<19





C · IP50 · IK02 · 70° · 50000 h L80B10 · UGR 19 · 20

220-240 V ~50/60 Hz | 250 mA
Total wattage: 10 W
Material: aluminium/steel

LED INSIDE · CCT · CRI 90

	3000 K	4000 K
Direct	1150 lm	1150 lm
Indirect	100 lm	100 lm


Variant	Prod. no.	GBP
● black	1007288	257.00
○ white	1007289	257.00

⊕

Product	Prod. no.	GBP
1.5 m suspension kit		
● black	135250	40.00
○ white	135251	40.00
5 m suspension kit		
○ white	1001950	88.00
● black	1001952	88.00

MEDO® PRO 40
CW, DALI, UGR<19





Dali · Touch · IP50 · IK02 · 80° · 50000 h L80B10 · UGR 19 · 20

220-240 V ~50/60 Hz | 500 mA
Total wattage: 19 W
Material: aluminium/steel

LED INSIDE · CCT · CRI 90

	3000 K	4000 K
Direct	2200 lm	2300 lm
Indirect	200 lm	200 lm


Variant	Prod. no.	GBP
● black	1007292	344.00
○ white	1007293	344.00

⊕

Product	Prod. no.	GBP
1.5 m suspension kit		
● black	135250	40.00
○ white	135251	40.00
5 m suspension kit		
○ white	1001950	88.00
● black	1001952	88.00

MEDO® PRO 40
CW, PHASE, UGR<19





C · IP50 · IK02 · 80° · 50000 h L80B10 · UGR 19 · 20

220-240 V ~50/60 Hz | 500 mA
Total wattage: 19 W
Material: aluminium/steel

LED INSIDE · CCT · CRI 90


	3000 K	4000 K
Direct	2200 lm	2300 lm
Indirect	200 lm	200 lm

Variant	Prod. no.	GBP
● black	1007296	300.00
○ white	1007297	300.00

⊕

Product	Prod. no.	GBP
1.5 m suspension kit		
● black	135250	40.00
○ white	135251	40.00
5 m suspension kit		
○ white	1001950	88.00
● black	1001952	88.00

MEDO® PRO 60
CW, DALI, UGR<19



Dali Touch IP50 IK02 80° 50000 h L80B10 UGR 19 20

220-240 V ~0/50/60 Hz | 1000 mA
Total wattage: 39 W
Material: aluminium/steel

LED INSIDE CCT CRI 90

	3000 K	4000 K
Direct	4600 lm	4700 lm
Indirect	400 lm	400 lm


Variant	Prod. no.	GBP
● black	**1007300**	**604.00**
○ white	**1007301**	**604.00**

⊕

Product	Prod. no.	GBP
1.5 m suspension kit		
● black	**135250**	**40.00**
○ white	**135251**	**40.00**
5 m suspension kit		
○ white	**1001950**	**88.00**
● black	**1001952**	**88.00**

MEDO® PRO 60
CW, PHASE, UGR<19





C IP50 IK02 80° 50000 h L80B10 UGR 19 20

220-240 V ~50/60 Hz | 1000 mA
Total wattage: 37 W
Material: aluminium/steel

LED INSIDE CCT CRI 90


	3000 K	4000 K
Direct	4600 lm	4700 lm
Indirect	400 lm	400 lm

Variant	Prod. no.	GBP
● black	**1007304**	**540.00**
○ white	**1007305**	**540.00**

⊕

Product	Prod. no.	GBP
1.5 m suspension kit		
● black	**135250**	**40.00**
○ white	**135251**	**40.00**
5 m suspension kit		
○ white	**1001950**	**88.00**
● black	**1001952**	**88.00**

MEDO® PRO 90
CL, DALI, UGR<19



Dali Touch IP50 IK02 80° 50000 h L80B10 UGR 19 20

220-240 V ~50/60 Hz | 1000 mA
Total wattage: 75 W
Material: aluminium/steel

LED INSIDE CCT CRI 90


	3000 K	4000 K
Direct	8800 lm	9100 lm
Indirect	600 lm	600 lm

Variant	Prod. no.	GBP
● black	**1007308**	**1,201.00**
○ white	**1007309**	**1,201.00**

⊕

Product	Prod. no.	GBP
1.5 m suspension kit		
● black	**135250**	**40.00**
○ white	**135251**	**40.00**
5 m suspension kit		
○ white	**1001950**	**88.00**
● black	**1001952**	**88.00**

MEDO® PRO 90
CL, PHASE, UGR<19



C · IP50 · IK02 · 80° · 50000 h L80B10 · UGR 19 · 20

220-240 V ~50/60 Hz | 1000 mA
Total wattage: 74 W
Material: aluminium/steel

INSIDE · CCT · CRI 90


	3000 K	4000 K
Direct	8800 lm	9100 lm
Indirect	600 lm	600 lm

Variant	Prod. no.	GBP
● black	1007312	1,072.00
○ white	1007313	1,072.00

⊕

Product	Prod. no.	GBP
1.5 m suspension kit		
● black	135250	40.00
○ white	135251	40.00
5 m suspension kit		
○ white	1001950	88.00
● black	1001952	88.00

MEDO® PRO 30
CW, DALI



Dali · Touch · IP50 · IK02 · 110° · 50000 h L80B10 · UGR 25 · 20

220-240 V ~50/60 Hz | 250 mA
Total wattage: 10 W
Material: aluminium/steel

INSIDE · CCT · CRI 90


	3000 K	4000 K
Direct	1300 lm	1300 lm
Indirect	50 lm	50 lm

Variant	Prod. no.	GBP
● black	1007286	277.00
○ white	1007287	277.00

⊕

Product	Prod. no.	GBP
1.5 m suspension kit		
● black	135250	40.00
○ white	135251	40.00
5 m suspension kit		
○ white	1001950	88.00
● black	1001952	88.00

MEDO® PRO 30
CW, PHASE



C · IP50 · IK02 · 110° · 50000 h L80B10 · UGR 25 · 20

220-240 V ~50/60 Hz | 250 mA
Total wattage: 10 W
Material: aluminium/steel

INSIDE · CCT · CRI 90


	3000 K	4000 K
Direct	1300 lm	1300 lm
Indirect	50 lm	50 lm

Variant	Prod. no.	GBP
● black	1007290	249.00
○ white	1007291	249.00

⊕

Product	Prod. no.	GBP
1.5 m suspension kit		
● black	135250	40.00
○ white	135251	40.00
5 m suspension kit		
○ white	1001950	88.00
● black	1001952	88.00


MEDO® PRO 40
CW, DALI



Dali Touch IP50 IK02 110° 50000 h L80B10 UGR 25 20

220-240 V ~50/60 Hz | 500 mA
Total wattage: 19 W
Material: aluminium/steel


MEDO® PRO 40
CW, PHASE



C IP50 IK02 110° 50000 h L80B10 UGR 25 20

220-240 V ~50/60 Hz | 500 mA
Total wattage: 19 W
Material: aluminium/steel

MEDO® PRO 60
CW, DALI



Dali Touch IP50 IK02 110° 50000 h L80B10 UGR 25 20

220-240 V ~0/50/60 Hz | 1000 mA
Total wattage: 39 W
Material: aluminium/steel

LED INSIDE CCT CRI 90

	3000 K	4000 K
Direct	2550 lm	2550 lm
Indirect	100 lm	100 lm

Variant	Prod. no.	GBP
● black	**1007294**	**336.00**
○ white	**1007295**	**336.00**

LED INSIDE CCT CRI 90

	3000 K	4000 K
Direct	2550 lm	2550 lm
Indirect	100 lm	100 lm

Variant	Prod. no.	GBP
● black	**1007298**	**292.00**
○ white	**1007299**	**292.00**

LED INSIDE CCT CRI 90

	3000 K	4000 K
Direct	5250 lm	5300 lm
Indirect	200 lm	200 lm

Variant	Prod. no.	GBP
● black	**1007302**	**588.00**
○ white	**1007303**	**588.00**

⊕

Product	Prod. no.	GBP
1.5 m suspension kit		
● black	**135250**	**40.00**
○ white	**135251**	**40.00**
5 m suspension kit		
○ white	**1001950**	**88.00**
● black	**1001952**	**88.00**


⊕

Product	Prod. no.	GBP
1.5 m suspension kit		
● black	**135250**	**40.00**
○ white	**135251**	**40.00**
5 m suspension kit		
○ white	**1001950**	**88.00**
● black	**1001952**	**88.00**

⊕

Product	Prod. no.	GBP
1.5 m suspension kit		
● black	**135250**	**40.00**
○ white	**135251**	**40.00**
5 m suspension kit		
○ white	**1001950**	**88.00**
● black	**1001952**	**88.00**

MEDO® PRO 60
CW, PHASE



C · IP50 · IK02 · 110° · 50000 h L80B10 · UGR 25 · 20

220-240 V ~50/60 Hz | 1000 mA
Total wattage: 37 W
Material: aluminium/steel

LED INSIDE · CCT · CRI 90


	3000 K	4000 K
Direct	5250 lm	5300 lm
Indirect	200 lm	200 lm

Variant	Prod. no.	GBP
● black	1007306	524.00
○ white	1007307	524.00

⊕

Product	Prod. no.	GBP
1.5 m suspension kit		
● black	135250	40.00
○ white	135251	40.00
5 m suspension kit		
○ white	1001950	88.00
● black	1001952	88.00

MEDO® PRO 90
CL, DALI



Dali · Touch · IP50 · IK02 · 110° · 50000 h L80B10 · UGR 25 · 20

220-240 V ~50/60 Hz | 1000 mA
Total wattage: 75 W
Material: aluminium/steel

LED INSIDE · CCT · CRI 90


	3000 K	4000 K
Direct	10550 lm	10750 lm
Indirect	450 lm	450 lm

Variant	Prod. no.	GBP
● black	1007310	1,184.00
○ white	1007311	1,184.00

⊕

Product	Prod. no.	GBP
1.5 m suspension kit		
● black	135250	40.00
○ white	135251	40.00
5 m suspension kit		
○ white	1001950	88.00
● black	1001952	88.00

MEDO® PRO 90
CL, PHASE



C · IP50 · IK02 · 110° · 50000 h L80B10 · UGR 25 · 20

220-240 V ~50/60 Hz | 1000 mA
Total wattage: 74 W
Material: aluminium/steel


LED INSIDE · CCT · CRI 90

	3000 K	4000 K
Direct	10550 lm	10750 lm
Indirect	450 lm	450 lm

Variant	Prod. no.	GBP
● black	1007314	1,057.00
○ white	1007315	1,057.00

⊕


Product	Prod. no.	GBP
1.5 m suspension kit		
● black	135250	40.00
○ white	135251	40.00
5 m suspension kit		
○ white	1001950	88.00
● black	1001952	88.00

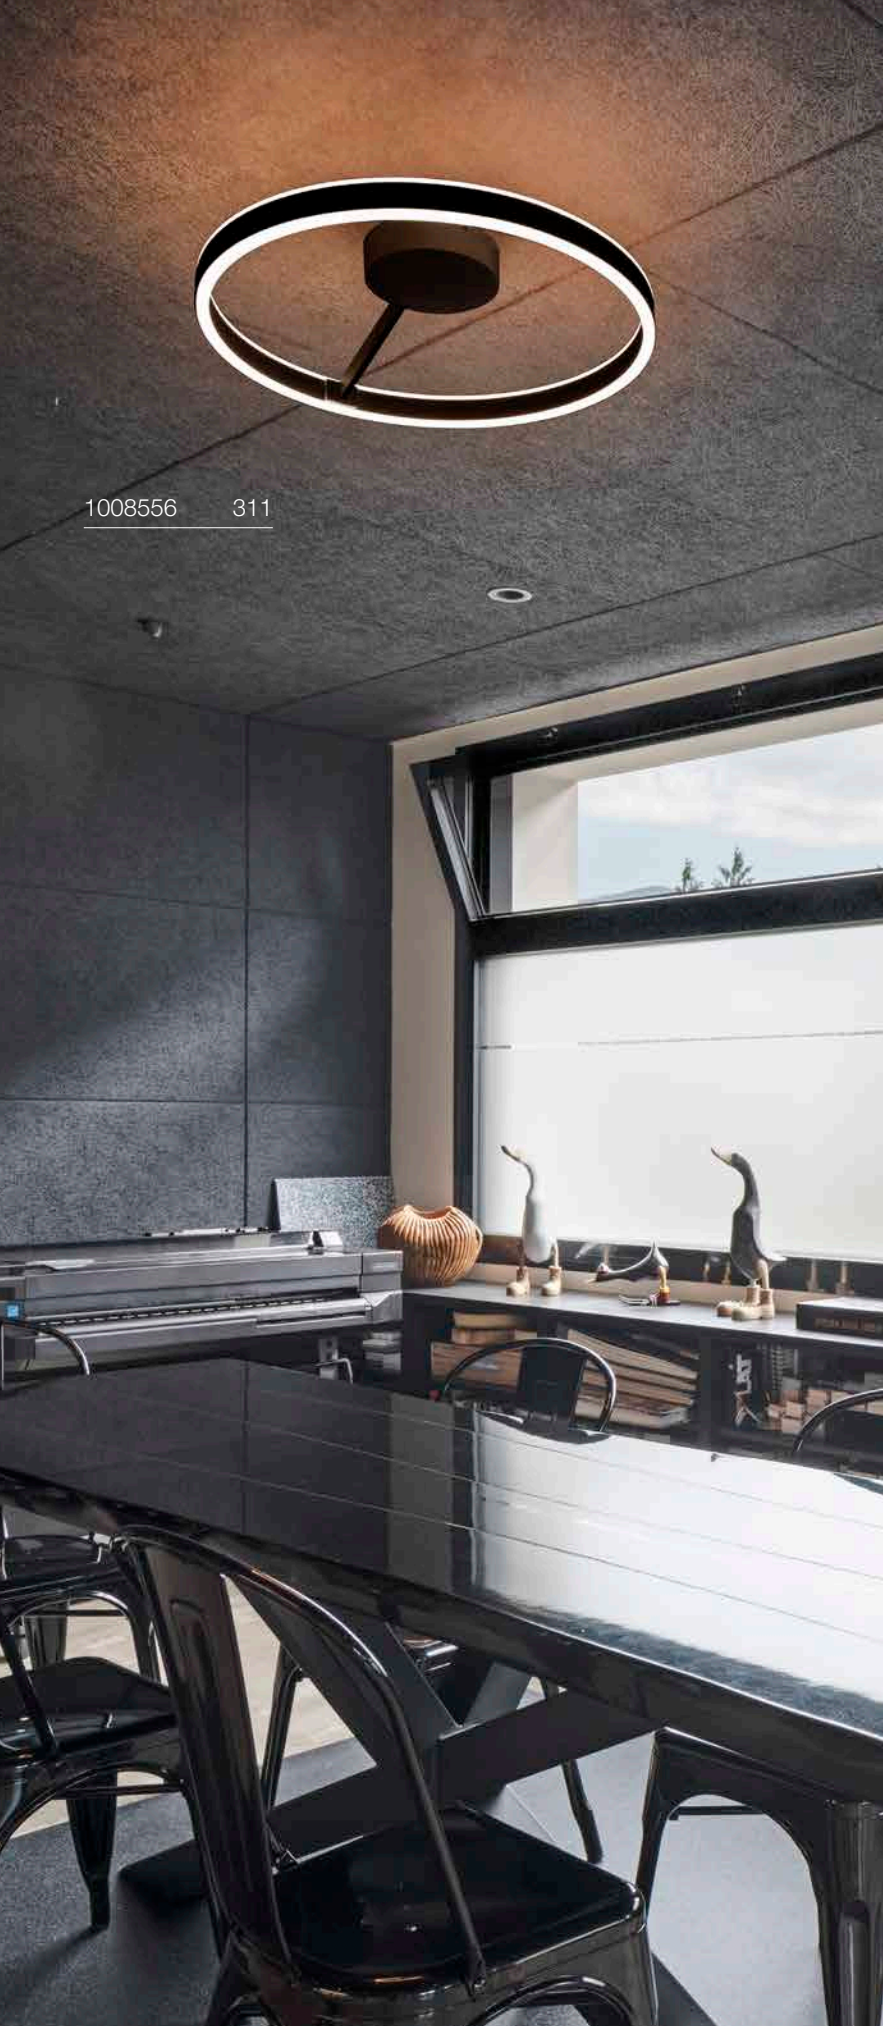

1008556 311

ONE 40
CW, PHASE, UP/DOWN







220-240 V ~50/60 Hz | 350 mA
Total wattage: 14 W
Material: aluminium/steel




Up	2700 K	3000 K
	450 lm	450 lm
Down	2700 K	3000 K
	450 lm	450 lm

Variant	Prod. no.	GBP
● black	**1008547**	**283.00**
○ white	**1008546**	**283.00**
● brass	**1008545**	**283.00**

ONE 60
CW, PHASE, UP/DOWN





C · IP20 · 130° · 50000 h L80B50

220-240 V ~50/60 Hz | 600 mA
Total wattage: 23 W
Material: aluminium/steel


LED INSIDE · CCT · CRI 90

		2700 K	3000 K
1008550	Up	550 lm	550 lm
	Down	750 lm	800 lm
1008549	Up	750 lm	800 lm
	Down	750 lm	800 lm
1008548	Up	750 lm	800 lm
	Down	750 lm	800 lm

Variant	Prod. no.	GBP
● black	**1008550**	**335.00**
○ white	**1008549**	**335.00**
● brass	**1008548**	**335.00**

ONE 40
CW, DALI, UP/DOWN





Dali · Touch · IP20 · 130° · 50000 h L80B50

220-240 V ~50/60 Hz | 350 mA
Total wattage: 14 W
Material: aluminium/steel


LED INSIDE · CCT · CRI 90

	2700 K	3000 K
Up	450 lm	450 lm
Down	450 lm	450 lm

Variant	Prod. no.	GBP
● black	**1008553**	**343.00**
○ white	**1008552**	**343.00**
● brass	**1008551**	**343.00**

ONE 60
CW, DALI, UP/DOWN





Dali · Touch · IP20 · 130° · 50000 h L80B50

220-240 V ~50/60 Hz | 600 mA
Total wattage: 23 W
Material: aluminium/steel

LED INSIDE · CCT · CRI 90

		2700 K	3000 K
1008556	Up	550 lm	550 lm
	Down	750 lm	800 lm
1008555	Up	750 lm	850 lm
	Down	750 lm	800 lm
1008554	Up	750 lm	850 lm
	Down	750 lm	800 lm

Variant	Prod. no.	GBP
● black	**1008556**	**403.00**
○ white	**1008555**	**403.00**
● brass	**1008554**	**403.00**




1002915 313

ONE LINEAR 50
WL, PHASE, UP/DOWN

GERMAN DESIGN AWARD SPECIAL 2022





IP44 120° 50 000 h L80B10

220-240 V ~50/60 Hz | 350 mA
Total wattage: 14 W
Material: aluminium/acrylic

LED INSIDE CCT CRI 90


1008086	Up	2700 K 450 lm	3000 K 500 lm
	Down	2700 K 450 lm	3000 K 500 lm
1008085	Up	2700 K 450 lm	3000 K 500 lm
	Down	2700 K 450 lm	3000 K 500 lm
1008084	Up	2700 K 365 lm	3000 K 405 lm
	Down	2700 K 365 lm	3000 K 405 lm

Variant	Prod. no.	GBP
white/black	**1008084**	**172.00**
white	**1008085**	**172.00**
white/brass	**1008086**	**172.00**

ONE LINEAR 70
WL, PHASE, UP/DOWN

GERMAN DESIGN AWARD SPECIAL 2022





C,L · IP44 · 120° · 50000 h L80B10

220-240 V ~50/60 Hz | 500 mA
Total wattage: 20 W
Material: aluminium/acrylic


INSIDE · CCT · CRI 90

		2700 K	3000 K
1008083	Up	625 lm	675 lm
	Down	625 lm	675 lm
1008082	Up	625 lm	675 lm
	Down	625 lm	675 lm
1008081	Up	495 lm	550 lm
	Down	495 lm	550 lm

Variant	Prod. no.	GBP
white/black	**1008081**	**206.00**
white	**1008082**	**206.00**
white/brass	**1008083**	**206.00**

ONE 40
CW, DALI





Dali · IP20 · 130° · 30000 h L70B50

220-240 V ~50/60 Hz | 350 mA
Total wattage: 14 W
Material: aluminium/steel


INSIDE · CCT · CRI 90

	3000 K	4000 K
	700 lm	730 lm

Variant	Prod. no.	GBP
black	**1002915**	**294.00**
white	**1002917**	**289.00**

ONE 60
CW, DALI





Dali · IP20 · 130° · 30000 h L70B50

220-240 V ~50/60 Hz | 600 mA
Total wattage: 24 W
Material: aluminium/steel


INSIDE · CCT · CRI 90

3000 K	4000 K
1350 lm	1430 lm

Variant	Prod. no.	GBP
black	**1002918**	**352.00**



TRUKKO
WL,RECTANGULAR



Touch IP44 30000 h L70B50

220-240 V ~50/60 Hz | 24 V
Total wattage: 25 W
Material: glass/plastic

- mirror heating and memory function included
- Light colour can be adjusted via touch function


LED INSIDE CCT CRI 90

	3000 K	4000 K	6500 K
	1080 lm	1290 lm	1250 lm

Variant	Prod. no.	GBP
transparent/opaque	**1004730**	**331.00**

TRUKKO
WL, ROUND





Touch IP44 30000 h L70B50

220-240 V ~50/60 Hz | 24 V
Total wattage: 25 W
Material: glass/plastic

- mirror heating and memory function included
- Light colour can be adjusted via touch function


LED INSIDE CCT CRI 90

	3000 K	4000 K	6500 K
1007201	730 lm	710 lm	720 lm
1004731	1270 lm	1260 lm	1260 lm

Variant	Prod. no.	GBP
transparent/black	**1007201**	**348.00**
transparent/opaque	**1004731**	**348.00**

TRUKKO 80
WL, ROUND





Touch IP44 30000 h L70B50

220-240 V ~50/60 Hz | 24 V
Total wattage: 23 W
Material: glass/plastic

- mirror heating and memory function included
- Light colour can be adjusted via touch function

LED INSIDE CCT CRI 90


	3000 K	4000 K	6500 K
1007202	730 lm	740 lm	790 lm

	3000 K	4000 K	6500 K
1007200	1100 lm	1130 lm	1210 lm

Variant	Prod. no.	GBP
transparent/black	**1007202**	**487.00**
transparent/opaque	**1007200**	**487.00**

TRUKKO 60
WL





IP44 IK03 120° 50000 h L70B50

220-240 V ~50/60 Hz | 500 mA
Total wattage: 9.2 W
Material: aluminium/plastic


LED INSIDE CRI 90

	3000 K
	750 lm

Variant	Prod. no.	GBP
transparent/opaque	**149762**	**142.00**

TRUKKO 90
WL





IP44 IK03 120° 50000 h L70B50

220-240 V ~50/60 Hz | 500 mA
Total wattage: 12 W
Material: aluminium/plastic

LED INSIDE CRI 90


	3000 K
	1040 lm

Variant	Prod. no.	GBP
transparent/opaque	**149772**	**168.00**



SEDO 14
WL







220-240 V ~50/60 Hz | 500 mA
Total wattage: 18 W
Material: aluminium/glass




3000 K
1300 lm

Variant	Prod. no.	GBP
○ white	**151781**	**210.00**
● aluminium	**151786**	**222.00**

SEDO 21
WL





IP20 | 30000 h L70B50

220-240 V ~50/60 Hz | 700 mA
Total wattage: 30 W
Material: aluminium/glass


LED INSIDE | CRI 80

3000 K
2500 lm

Variant	Prod. no.	GBP
○ white	**151791**	**256.00**
● aluminium	**151796**	**256.00**

ARLINA 60
WL





IP20 | 30000 h L70B50

220-240 V ~50/60 Hz | 500 mA
Total wattage: 23 W
Material: aluminium/glass


LED INSIDE | CRI 80

3000 K
1550 lm

Variant	Prod. no.	GBP
● aluminium	**1002239**	**226.00**

ARLINA 130
WL





IP20 | 30000 h L70B50

220-240 V ~50/60 Hz | 700 mA
Total wattage: 28 W
Material: aluminium/glass

LED INSIDE | CRI 80


3000 K
2400 lm

Variant	Prod. no.	GBP
● aluminium	**1002240**	**289.00**



WL 106
E14





IP44

220-240 V ~50/60 Hz
Material: aluminium/glass

SOCKET INSIDE 40 W

Base: 1 × E14 | max. Ø: 3.6 cm | L: 11 cm

Variant	Prod. no.	GBP
chrome/white	**1002228**	**79.00**


E14 | 4 W | 320°
350 lm | 2700 K | EEC = G

C

Prod. no.: **1005285** **8.00 GBP**

WL 106
E14





IP44

220-240 V ~50/60 Hz
Material: aluminium/glass

SOCKET INSIDE 40 W

Base: 2 × E14 | max. Ø: 3.6 cm | L: 11 cm

Variant	Prod. no.	GBP
chrome/white	1002229	142.00


E14 | 4 W | 320°
380 lm | 2700 K | EEC = F

C,L

Prod. no.: 1005284 6.00 GBP

MIBO UP/DOWN
WL, QT14





IP21

220-240 V ~50/60 Hz
Material: aluminium/glass

SOCKET INSIDE 25 W

Base: 2 × G69


Variant	Prod. no.	GBP
chrome	151282	81.00

G9 | 4 W | 300°
400 lm | 3000 K | EEC = E

Prod. no.: 1005286 8.00 GBP

MAGANDA
WL





IP44 IK02 90° 30000 h L70B50

100-240 V ~50/60 Hz | 12 V
Total wattage: 4.8 W
Material: steel/glass

- Light colour can be adjusted via the housing switch.


LED INSIDE CCT CRI 90

2700 K	3000 K	4000 K
45 lm	48 lm	51 lm

Variant	Prod. no.	GBP
chrome	1004971	172.00

DORISA 30
WL





IP44 | 110° | 50 000 h L80B10

220-240 V ~50/60 Hz | 120 mA
Total wattage: 5.2 W
Material: aluminium/plastic


LED INSIDE | CRI 90

	4000 K
1011757	370 lm
1000777	420 lm

Variant	Prod. no.	GBP
● black 370 lm	**1011757**	**100.00**
◑ chrome 420 lm	**1000777**	**100.00**

DORISA 50
WL





IP44 | 110° | 50 000 h L80B10

220-240 V ~50/60 Hz | 145 mA
Total wattage: 6 W
Material: aluminium/plastic


LED INSIDE | CRI 90

	4000 K
1011758	430 lm
1000780	490 lm

Variant	Prod. no.	GBP
● black 430 lm	**1011758**	**109.00**
◑ chrome 490 lm	**1000780**	**113.00**

GLENOS® 2.0
WL, 1,5 M, DALI, UGR22

NEW



Dali | Touch | IP20 | 100 000 h L80B20 | UGR 22 | 41


200-240 V ~0/50/60 Hz | 550 mA
Total wattage: 20 W
Material: aluminium

LED INSIDE | CRI 80

	4000 K	3000 K
1012169 Down	2700 lm	
1012168 Down	2950 lm	
1012167 Down		2650 lm
1012166 Down		2900 lm

Variant	Prod. no.	GBP
● black 2650 lm | 3000 K	**1012167**	**302.00**
● black 2700 lm | 4000 K	**1012169**	**302.00**
○ white 2900 lm | 3000 K	**1012166**	**302.00**
○ white 2950 lm | 4000 K	**1012168**	**302.00**

Q-LINE®
WL



IP20 | 110° | 30000 h L70B50


220-240 V ~50/60 Hz | 700 mA
Total wattage: 45 W
Material: aluminium/acrylic

LED INSIDE | CRI 80

	3000 K
	3800 lm

Variant	Prod. no.	GBP
● black	**1000669**	**398.00**
○ white	**1000668**	**398.00**
● grey	**1000670**	**398.00**

L-LINE 60
WL



IP44 | 120° | 30000 h L70B50 | 20


220-240 V ~50/60 Hz | 350 mA
Total wattage: 10 W
Material: aluminium/polycarbonate (PC)

LED INSIDE | CRI 80

	3000 K
	820 lm

Variant	Prod. no.	GBP
○ white	**1001299**	**210.00**
● silver	**1001300**	**210.00**

L-LINE 120
WL



IP44 | 120° | 30000 h L80B10

220-240 V ~50/60 Hz | 500 mA
Total wattage: 26 W
Power consumption: 14 W
Material: aluminium/polycarbonate (PC)

LED INSIDE | CRI 80


	3000 K
1001303	2250 lm
	3000 K
1001304	1650 lm

Variant	Prod. no.	GBP
○ white 2250 lm	**1001303**	**285.00**
● silver 1650 lm	**1001304**	**285.00**



PANTILO ROPE
WL, G9





IP20

220-240 V ~50/60 Hz
Material: glass

SOCKET INSIDE 15 W

Base: 1 × G69 | max. Ø: 3 cm | L: 6 cm

Variant	Prod. no.	GBP
anthracite/silver	**1007594**	**155.00**
amber/gold	**1007595**	**155.00**


G9 | 4 W | 300°
400 lm | 3000 K | EEC = E

Prod. no.: **1005286** **8.00 GBP**

ENOLA® 2.0 S
CW, SINGLE, GU10 MINI, PAR11, ROUND

NEW





IP20 IK02 340° 90°

220-240 V ~50/60 Hz
Material: aluminium/steel/plastic PC

SOCKET INSIDE 5 W

Base: 1 × GU10 | max. Ø: 3.6 cm | L: 4.6 cm

Variant	Prod. no.	GBP
● black	1011915	47.00
○ white	1011916	47.00

GU10 | 5 W | 36°
390 lm | 2700 K | EEC = F

C,L


Prod. no.: 1011670 10.00 GBP

Product	Prod. no.	GBP
ENOLA® 2.0 S, decorative ring		
● black	1011753	4.00
○ white	1011754	4.00
● gold	1011755	4.00
● copper	1011756	4.00

ENOLA® 2.0 S
CW, SINGLE, GU10 MINI, PAR11, SQUARE

NEW





IP20 IK02 340° 90° 50

220-240 V ~50/60 Hz
Material: aluminium/steel/plastic PC

SOCKET INSIDE 5 W

Base: 1 × GU10 | max. Ø: 3.6 cm | L: 4.6 cm

Variant	Prod. no.	GBP
● black	1011917	47.00
○ white	1011918	47.00

GU10 | 5 W | 36°
390 lm | 2700 K | EEC = F

C,L


Prod. no.: 1011670 10.00 GBP

Product	Prod. no.	GBP
ENOLA® 2.0 S, decorative ring		
● black	1011753	4.00
○ white	1011754	4.00
● gold	1011755	4.00
● copper	1011756	4.00

ENOLA® 2.0 S
WL, SINGLE, GU10 MINI, PAR11, BEDSIDE, USBC

NEW





IP20 IK02 340° 90° 50

220-240 V ~50/60 Hz
Material: aluminium/steel/plastic

• USB type-C port: 5 V 2 A, max. 10 W

SOCKET INSIDE 5 W

Base: 1 × GU10 | max. Ø: 3.6 cm | L: 4.6 cm

Variant	Prod. no.	GBP
● black	1011923	77.00
○ white	1011924	77.00

GU10 | 5 W | 36°
390 lm | 2700 K | EEC = F

C,L

Prod. no.: 1011670 10.00 GBP


Product	Prod. no.	GBP
ENOLA® 2.0 S, decorative ring		
● black	1011753	4.00
○ white	1011754	4.00
● gold	1011755	4.00
● copper	1011756	4.00


1011915 323
1011929 244

ENOLA® 2.0 S
WL, SINGLE, GU10 MINI, PAR11

NEW





IP20 IK02

220-240 V ~50/60 Hz
Material: aluminium/steel

SOCKET INSIDE 5 W

Base: 1 × GU10 | max. Ø: 3.6 cm | L: 4.6 cm

Variant	Prod. no.	GBP
● black	**1011925**	**48.00**
○ white	**1011926**	**48.00**

GU10 | 5 W | 36°
390 lm | 2700 K | EEC = F

C,L


Prod. no.: 1011670 10.00 GBP

Product	Prod. no.	GBP
ENOLA® 2.0 S, decorative ring		
● black	**1011753**	**4.00**
○ white	**1011754**	**4.00**
● gold	**1011755**	**4.00**
● copper	**1011756**	**4.00**

ENOLA® 2.0 S
WL, DOUBLE, GU10 MINI, PAR11

NEW





IP20 IK02

220-240 V ~50/60 Hz
Material: aluminium/steel

SOCKET INSIDE 5 W

Base: 2 × GU10 | max. Ø: 3.6 cm | L: 4.6 cm

Variant	Prod. no.	GBP
● black	**1011927**	**65.00**
○ white	**1011928**	**65.00**

GU10 | 5 W | 36°
390 lm | 2700 K | EEC = F

C,L

Prod. no.: 1011670 10.00 GBP

Product	Prod. no.	GBP
ENOLA® 2.0 S, decorative ring		
● black	**1011753**	**4.00**
○ white	**1011754**	**4.00**
● gold	**1011755**	**4.00**
● copper	**1011756**	**4.00**

ENOLA® 2.0 S
DECORATIVE RING

NEW




Ø: 3.9 cm
H: 1.1 cm
Material: plastic PC

Variant	Prod. no.	GBP
● black	**1011753**	**4.00**
○ white	**1011754**	**4.00**
● gold	**1011755**	**4.00**
● copper	**1011756**	**4.00**

ENOLA® 2.0 M
CW, SINGLE, GU10, QPAR51, ROUND

NEW





IP20 IK02 340° 90°

220-240 V ~50/60 Hz
Material: aluminium/steel/plastic PC

SOCKET INSIDE 10 W

Base: 1 × GU10 max. Ø: 5.1 cm | L: 6 cm

Variant	Prod. no.	GBP
● black	1011893	52.00
○ white	1011894	52.00

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

C,L


Prod. no.: 1005076 **7.00 GBP**

Product	Prod. no.	GBP
ENOLA® 2.0/BIMA 2.0 M, decorative ring		
● black	1011749	4.00
○ white	1011750	4.00
gold	1011751	4.00
copper	1011752	4.00

ENOLA® 2.0 M
CW, SINGLE, GU10, QPAR51, SQUARE

NEW





IP20 IK02 340° 90° 50

220-240 V ~50/60 Hz
Material: aluminium/steel/plastic PC

SOCKET INSIDE 10 W

Base: 1 × GU10 max. Ø: 5.1 cm | L: 6 cm

Variant	Prod. no.	GBP
● black	1011895	52.00
○ white	1011896	52.00

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

C,L


Prod. no.: 1005076 **7.00 GBP**

Product	Prod. no.	GBP
ENOLA® 2.0/BIMA 2.0 M, decorative ring		
● black	1011749	4.00
○ white	1011750	4.00
gold	1011751	4.00
copper	1011752	4.00

ENOLA® 2.0 M
WL, SINGLE, GU10, QPAR51

NEW





IP20 IK02

220-240 V ~50/60 Hz
Material: aluminium/steel

SOCKET INSIDE 10 W

Base: 1 × GU10 | max. Ø: 5.1 cm | L: 6 cm

Variant	Prod. no.	GBP
● black	**1011903**	**52.00**
○ white	**1011904**	**52.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

C,L


Prod. no.: 1005076 7.00 GBP

Product	Prod. no.	GBP
ENOLA® 2.0/BIMA 2.0 M, decorative ring		
● black	**1011749**	**4.00**
○ white	**1011750**	**4.00**
● gold	**1011751**	**4.00**
● copper	**1011752**	**4.00**

ENOLA® 2.0 M
WL, DOUBLE, GU10, QPAR51

NEW





IP20 IK02

220-240 V ~50/60 Hz
Material: aluminium/steel

SOCKET INSIDE 10 W

Base: 2 × GU10 | max. Ø: 5.1 cm | L: 6 cm

Variant	Prod. no.	GBP
● black	**1011905**	**68.00**
○ white	**1011906**	**68.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

C,L

Prod. no.: 1005076 7.00 GBP

Product	Prod. no.	GBP
ENOLA® 2.0/BIMA 2.0 M, decorative ring		
● black	**1011749**	**4.00**
○ white	**1011750**	**4.00**
● gold	**1011751**	**4.00**
● copper	**1011752**	**4.00**

ENOLA® 2.0/BIMA 2.0 M
DECORATIVE RING

NEW



Ø: 5.4 cm
H: 2 cm
Material: plastic PC


Variant	Prod. no.	GBP
● black	**1011749**	**4.00**
○ white	**1011750**	**4.00**
● gold	**1011751**	**4.00**
● copper	**1011752**	**4.00**



GRIP! S
WL, Ø 3,0 CM, ON/OFF SWITCH

NEW





IP20 IK02 29° 330° 90° 50000 h L80B10 UGR 25

220-240 V ~50/60 Hz | 100 mA
Total wattage: 4.6 W
Material: aluminium

- Honeycomb accessories included
- On/off switch included

LED INSIDE CRI 90

	2700 K
	260 lm

Variant	Prod. no.	GBP
black/gold	1012179	147.00
white/black	1012178	147.00
bronze/black	1012180	147.00


⊕

Product	Prod. no.	GBP
GRIP! S, decorative ring		
white	1011829	16.00
black	1011830	16.00
nickel	1011831	16.00
gold	1011832	16.00
HONEYCOMB + spacer		
black	1011837	8.00

GRIP! S
WL, PHASE, UP/DOWN, Ø 3,0 CM

NEW





C IP20 IK02 29° 50000 h L80B10 UGR 25

220-240 V ~50/60 Hz | 300 mA
Total wattage: 12 W
Material: aluminium

- Honeycomb accessories included

LED INSIDE CRI 90

Up	2700 K
	370 lm
Down	2700 K
	370 lm

Variant	Prod. no.	GBP
black/gold	1012175	172.00
white/black	1012174	172.00
bronze/black	1012176	172.00


⊕

Product	Prod. no.	GBP
GRIP! S, decorative ring		
white	1011829	16.00
black	1011830	16.00
nickel	1011831	16.00
gold	1011832	16.00
HONEYCOMB + spacer		
black	1011837	8.00

GRIP! L
WL, UP OR DOWN, 1X QPAR51, Ø 5,7 CM

NEW





IP20 IK02

220-240 V ~50/60 Hz
Material: aluminium

- Honeycomb accessories included

SOCKET INSIDE 6 W

Base: 1 × GU10 | max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.	GBP
black/gold	1011878	88.00
white/black	1011877	88.00
gold/black	1011880	88.00
bronze/black	1011879	88.00

GU10 | 6 W | 38°
470 lm | 3000 K | EEC = F

C,L

Prod. no.: 1005080 7.00 GBP

SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F


Prod. no.: 1012469 23.00 GBP

Product	Prod. no.	GBP
GRIP! L, decorative ring		
white	1008496	21.00
black	1008497	21.00
nickel	1008498	21.00
gold	1008499	21.00
HONEYCOMB + spacer		
black	1011839	11.00

GRIP! L
WL, UP/DOWN, 2X QPAR51, Ø 5,7 CM

NEW





IP20 IK02

220-240 V ~50/60 Hz
Material: aluminium

- Honeycomb accessories included

SOCKET INSIDE 6 W

Base: 2 × GU10 | max. Ø: 5.1 cm | L: 5.5 cm

Variant	Prod. no.	GBP
black/gold	1011882	113.00
white/black	1011881	113.00
gold/black	1011884	113.00
bronze/black	1011883	113.00

GU10 | 6 W | 38°
470 lm | 3000 K | EEC = F

C,L

Prod. no.: 1005080 7.00 GBP

SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F


Prod. no.: 1012469 23.00 GBP

Product	Prod. no.	GBP
GRIP! L, decorative ring		
white	1008496	21.00
black	1008497	21.00
nickel	1008498	21.00
gold	1008499	21.00
HONEYCOMB + spacer		
black	1011839	11.00

GRIP! FLAT
CL, PHASE

GERMAN DESIGN AWARD WINNER 2026





C IP20 50000 h L70B50 UGR 15

220-240 V ~50/60 Hz | 500 mA
Total wattage: 15 W
Material: aluminium

- 2700 K/3000 K colour temperature switch included
- Contains honeycomb structure

LED INSIDE CCT CRI 90

Down	2700 K	3000 K
	400 lm	430 lm


Variant	Prod. no.	GBP
black	1009100	214.00
white/black	1009101	214.00

Product	Prod. no.	GBP
GRIP! FLAT, decorative ring		
black	1009102	28.00
white	1009103	28.00
gold	1009104	28.00


1006441 331

ASTO TUBE
WL, SINGLE, GU10





IP20

220-240 V ~50/60 Hz
Material: aluminium

• Decorative rings available as accessory

SOCKET INSIDE 10 W

Base: 1 × GU10

Variant	Prod. no.	GBP
● black	**1006441**	**52.00**
○ white	**1006442**	**52.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

C,L

Prod. no.: 1005077 7.00 GBP

SMART


GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: 1012469 23.00 GBP

Product	Prod. no.	GBP
Decorative reflector		
chrome	**1006449**	**4.00**
gold	**1006450**	**4.00**
copper	**1006451**	**4.00**
black/chrome	**1007190**	**4.00**

ASTO TUBE
WL, UP/DOWN, GU10





IP20

220-240 V ~50/60 Hz
Material: aluminium

• Decorative rings available as accessory

SOCKET INSIDE 10 W

Base: 2 × GU10

Variant	Prod. no.	GBP
● black	**1006443**	**69.00**
○ white	**1006444**	**69.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

C,L

Prod. no.: 1005077 7.00 GBP

SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: 1012469 23.00 GBP

Product	Prod. no.	GBP
Decorative reflector		
chrome	**1006449**	**4.00**
gold	**1006450**	**4.00**
copper	**1006451**	**4.00**
black/chrome	**1007190**	**4.00**


ASTO TUBE
DECORATIVE REFLECTOR



Ø: 6.8 cm
H: 4 cm
Material: polycarbonate (PC)

Variant	Prod. no.	GBP
black/chrome	**1007190**	**4.00**
gold	**1006450**	**4.00**
chrome	**1006449**	**4.00**
copper	**1006451**	**4.00**



1008204 335
1008201 335
1008205 335

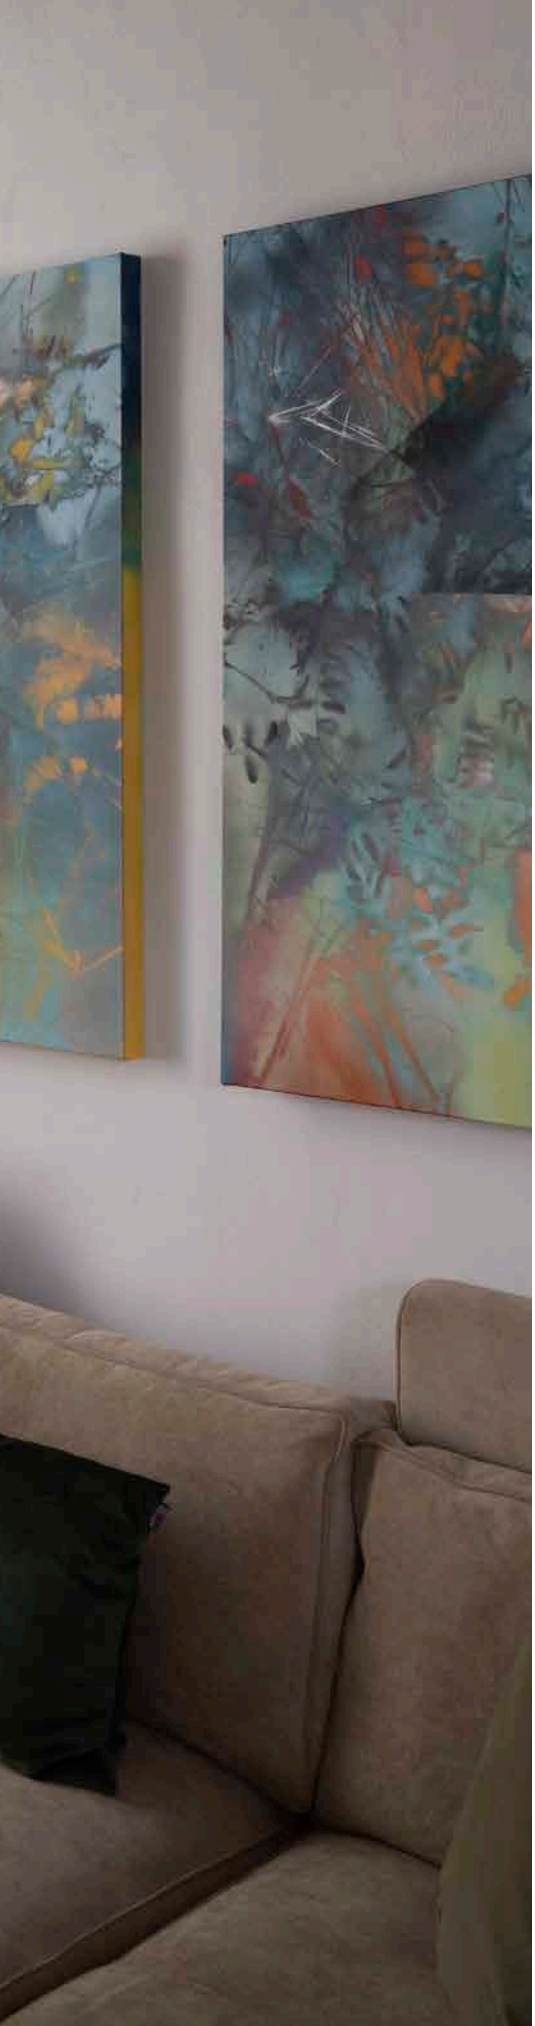

MANA BASE
WL, ROUND, PHASE

GERMAN DESIGN AWARD SPECIAL 2022






IP65 | 50000 h L80B50 | 68


220-240 V ~50/60 Hz | 350 mA
Total wattage: 15 W
Material: aluminium/polycarbonate (PC)

LED INSIDE | CCT | CRI 90

2700 K	3000 K
1070 lm	1100 lm


Variant	Prod. no.	GBP
● anthracite	**1006319**	**163.00**

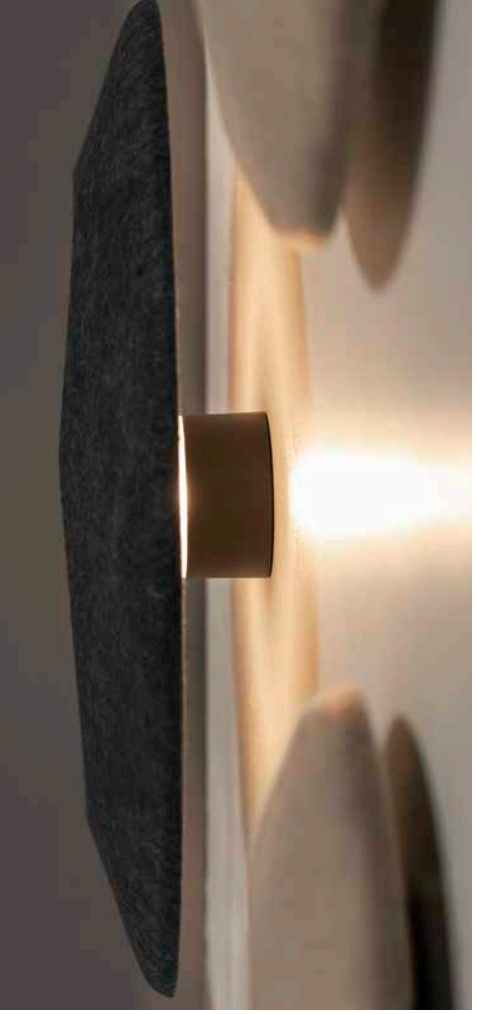

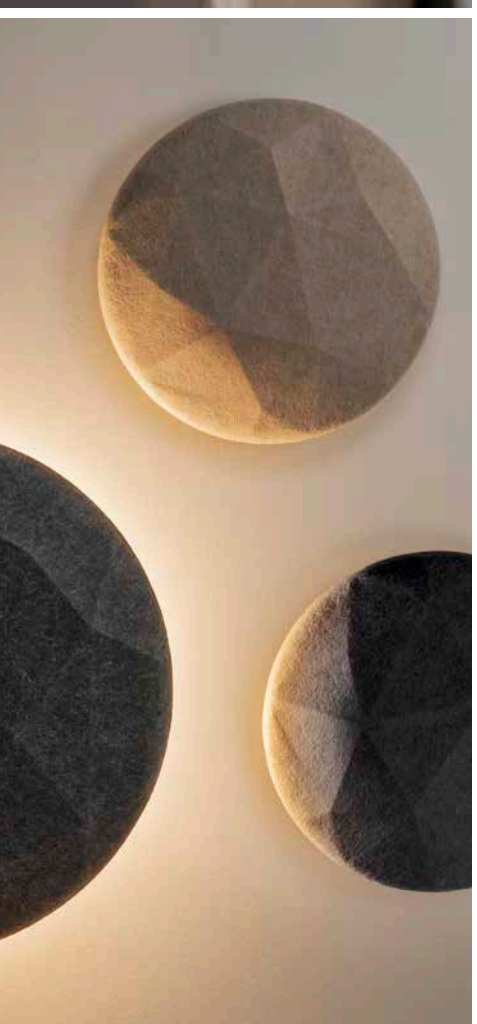

MANA BASE
ROUND





Material: aluminium/polycarbonate (PC)

- Non-illuminated base for round shades in the MANA series

Variant	Prod. no.	GBP
anthracite	1004969	23.00

MANA 40
SHADE, ROUND, ACOUSTIC FELT



IP20

Ø: 40 cm
H: 6 cm
Material: felt/aluminium

Variant	Prod. no.	GBP
grey	1004661	88.00
beige	1004660	88.00

MANA 60
SHADE, ROUND, ACOUSTIC FELT



IP20

Ø: 60 cm
H: 6 cm
Material: felt/aluminium

Variant	Prod. no.	GBP
grey	1004663	126.00
beige	1004662	126.00

MANA 40
SHADE, ROUND



IP20

Ø: 40 cm
H: 2.2 cm
Material: steel

Variant	Prod. no.	GBP
● black	**1008201**	**69.00**

MANA 40
SHADE, ROUND

IP20

Ø: 40 cm
H: 2.2 cm
Material: steel

Variant	Prod. no.	GBP
○ white	**1008203**	**69.00**

MANA 40
SHADE, ROUND,
MOON STRUCTURE



IP20

Ø: 40 cm
H: 2.2 cm
Material: steel

Variant	Prod. no.	GBP
● gold	**1008205**	**88.00**

MANA 60
SHADE, ROUND



IP20

Ø: 60 cm
H: 4.2 cm
Material: steel

Variant	Prod. no.	GBP
● black	**1008202**	**109.00**

MANA 60
SHADE, ROUND

IP20

Ø: 60 cm
H: 4.2 cm
Material: steel

Variant	Prod. no.	GBP
○ white	**1008204**	**109.00**

MANA 60
SHADE, ROUND,
MOON STRUCTURE



IP20


Ø: 60 cm
H: 4.2 cm
Material: steel

Variant	Prod. no.	GBP
● gold	**1008206**	**126.00**


1004670 337

OCULUS
WL, SINGLE, PHASE





IP20 | 100° | 25000 h L70B50

220-240 V ~50/60 Hz | 350 mA
Total wattage: 8.5 W
Material: aluminium

• Additional frosted lens included


LED INSIDE | DIM TO WARM | CRI 90

	2000 K	-	3000 K
	57 lm	-	570 lm

Variant	Prod. no.	GBP
● black	**1006307**	**197.00**
○ white	**1006308**	**197.00**

OCULUS UP/DOWN
WL, PHASE





IP20 | IK02 | 100° | 50000 h L80B20

220-240 V ~50/60 Hz | 700 mA
Total wattage: 15 W
Material: aluminium

• Additional frosted lens included


LED INSIDE | DIM TO WARM | CRI 90

	2000 K	-	3000 K
Up	22 lm	-	555 lm
Down	22 lm	-	555 lm

Variant	Prod. no.	GBP
● black	**1004670**	**214.00**
○ white	**1004671**	**214.00**

OCULUS WL UP/DOWN
DTW, PVD





IP20 | IK02 | 100° | 30000 h L70B50


220-240 V ~50/60 Hz | 700 mA
Total wattage: 15 W
Material: aluminium

• Additional frosted lens included

LED INSIDE | DIM TO WARM | CRI 90


	2000 K	-	3000 K
Up	22 lm	-	555 lm
Down	22 lm	-	555 lm

Variant	Prod. no.	GBP
brass	**1008613**	**319.00**
dark bronze	**1008612**	**319.00**
dark copper	**1008614**	**319.00**

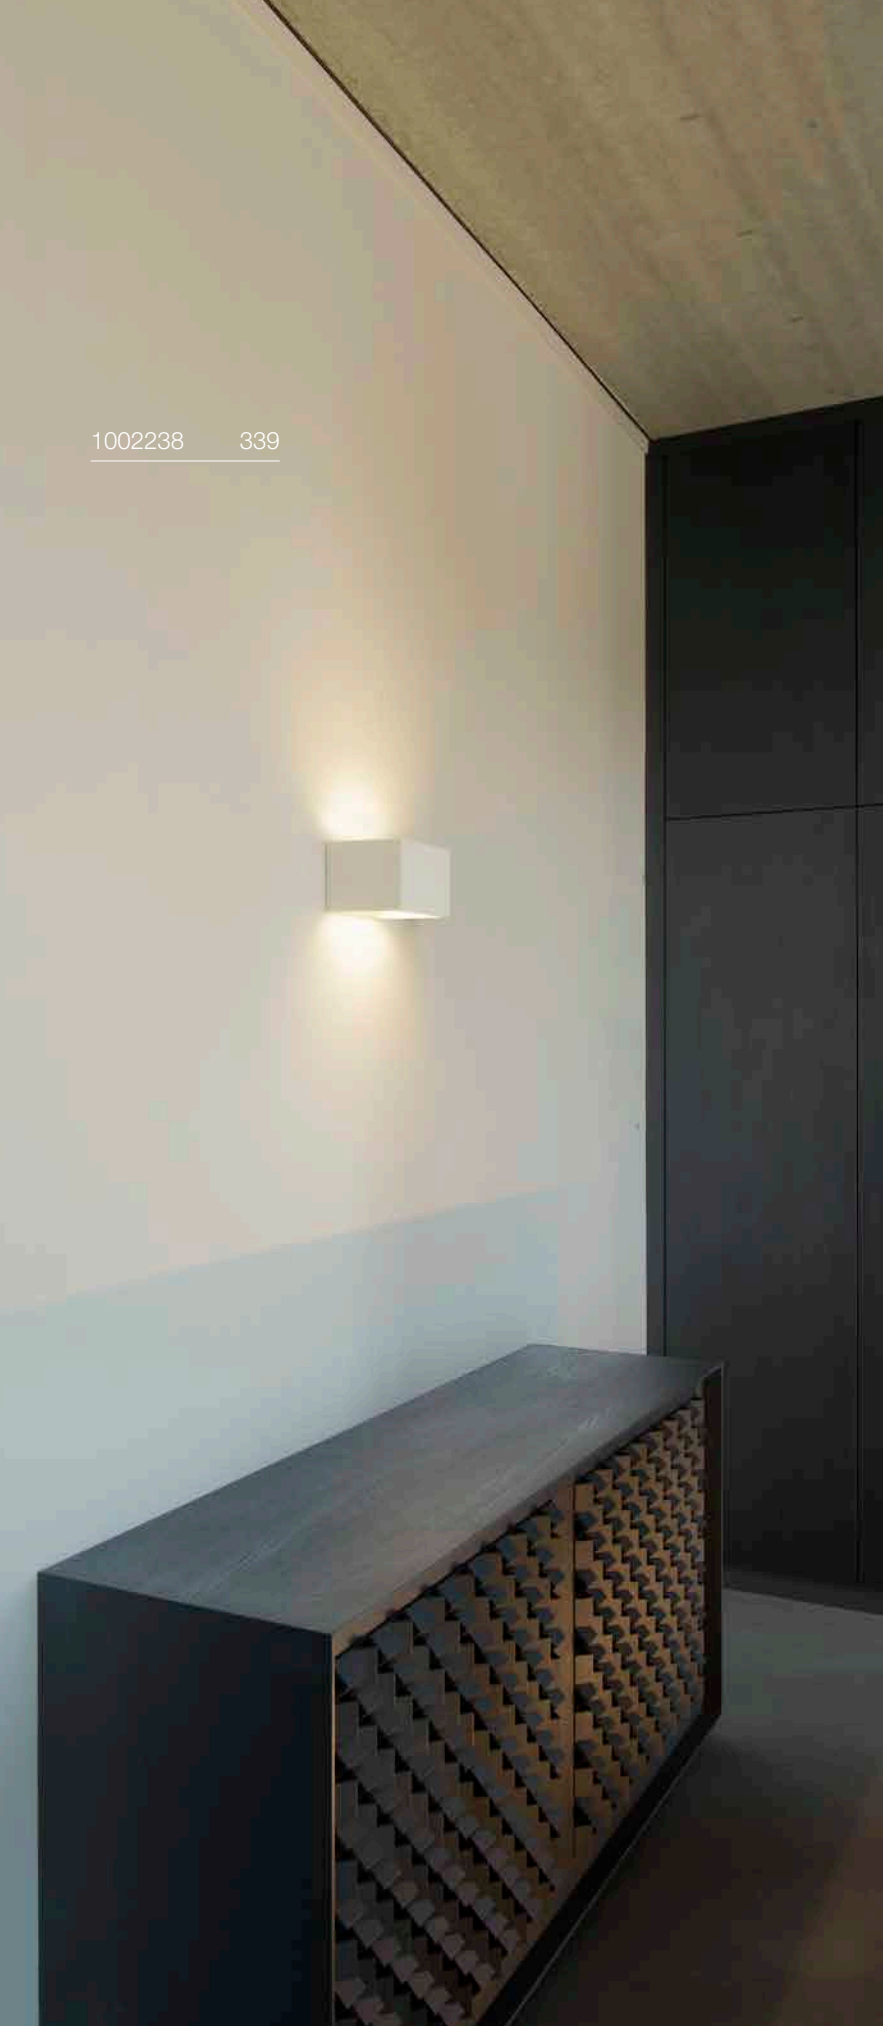

PLASTRA
WL, CUBE, QT14





IP20

220-240 V ~50/60 Hz
Material: plaster/steel

SOCKET INSIDE 42 W

Base: 1 × G69


Variant	Prod. no.	GBP
○ white	**148018**	**47.00**

G9 | 4 W | 300°
400 lm | 3000 K | EEC = E

Prod. no.: **1005286** **8.00 GBP**

PLASTRA
WL, RECTANGULAR, QT-DE12





IP20

220-240 V ~50/60 Hz
Material: plaster/steel

SOCKET INSIDE 20 W

Base: 1 × R7s 118 mm


Variant	Prod. no.	GBP
○ white	**1002238**	**68.00**

R7s 118 mm | 15 W | 330°
2000 lm | 3000 K | EEC = E

Prod. no.: **1005288** **25.00 GBP**

PLASTRA
WL, E14





IP20

220-240 V ~50/60 Hz
Material: plaster/steel

SOCKET INSIDE 40 W

Base: 1 × E14


Variant	Prod. no.	GBP
○ white	**148010**	**46.00**

E14 | 4 W | 320°
350 lm | 2700 K | EEC = G

Prod. no.: **1005285** **8.00 GBP**

PLASTRA
WL, SEMICIRCULAR





IP20

220-240 V ~50/60 Hz
Material: plaster/steel

SOCKET INSIDE 20 W


Base: 1 × R7s 118 mm | max. Ø: 2 cm | L: 11.8 cm

Variant	Prod. no.	GBP
○ white	**1004732**	**63.00**

R7s 118 mm | 15 W | 330°
2000 lm | 3000 K | EEC = E

Prod. no.: **1005288** **25.00 GBP**

PLASTRA
WL, ROUND SHIELD



30000 h L70B50

100-240 V ~50/60 Hz | 12 V
Total wattage: 6.5 W
Material: plaster/steel


LED INSIDE CRI 80

3000 K
375 lm

Variant	Prod. no.	GBP
○ white	**148091**	**147.00**

PLASTRA
WL, ANGULAR





IP20 30000 h L70B50

100-240 V ~50/60 Hz | 12 V
Total wattage: 10.5 W
Material: plaster/steel


LED INSIDE CRI 80

3000 K
650 lm

Variant	Prod. no.	GBP
○ white	**148019**	**189.00**

PLASTRA
WL, QPAR51





IP20

220-240 V ~50/60 Hz
Material: plaster/steel

SOCKET INSIDE 35 W

Base: 2 × GU10

Variant	Prod. no.	GBP
○ white	**148060**	**58.00**


GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

C,L

Prod. no.: **1005076** **7.00 GBP**

PLASTRA 101
WL, E14





IP20

220-240 V ~50/60 Hz
Material: plaster/steel

SOCKET INSIDE 40 W


Base: 1 × E14 max. Ø: 4.5 cm | L: 11 cm

Variant	Prod. no.	GBP
○ white	**148013**	**47.00**

E14 | 4 W | 320°
350 lm | 2700 K | EEC = G

Prod. no.: 1005285 8.00 GBP

PLASTRA
WL, CURVE, QT-DE12



IP20

220-240 V ~50/60 Hz
Material: plaster/steel

SOCKET INSIDE 100 W


Base: 1 × R7s 78 mm

Variant	Prod. no.	GBP
○ white	**148012**	**63.00**

R7s 78 mm | 9 W | 330°
1050 lm | 3000 K | EEC = E

Prod. no.: 1005287 21.00 GBP

PLASTRA 104
WL, QT14



IP20

220-240 V ~50/60 Hz
Material: plaster/steel


SOCKET INSIDE 42 W

Base: 1 × G69

Variant	Prod. no.	GBP
○ white	**148016**	**47.00**

G9 | 4 W | 300°
400 lm | 3000 K | EEC = E

Prod. no.: 1005286 8.00 GBP

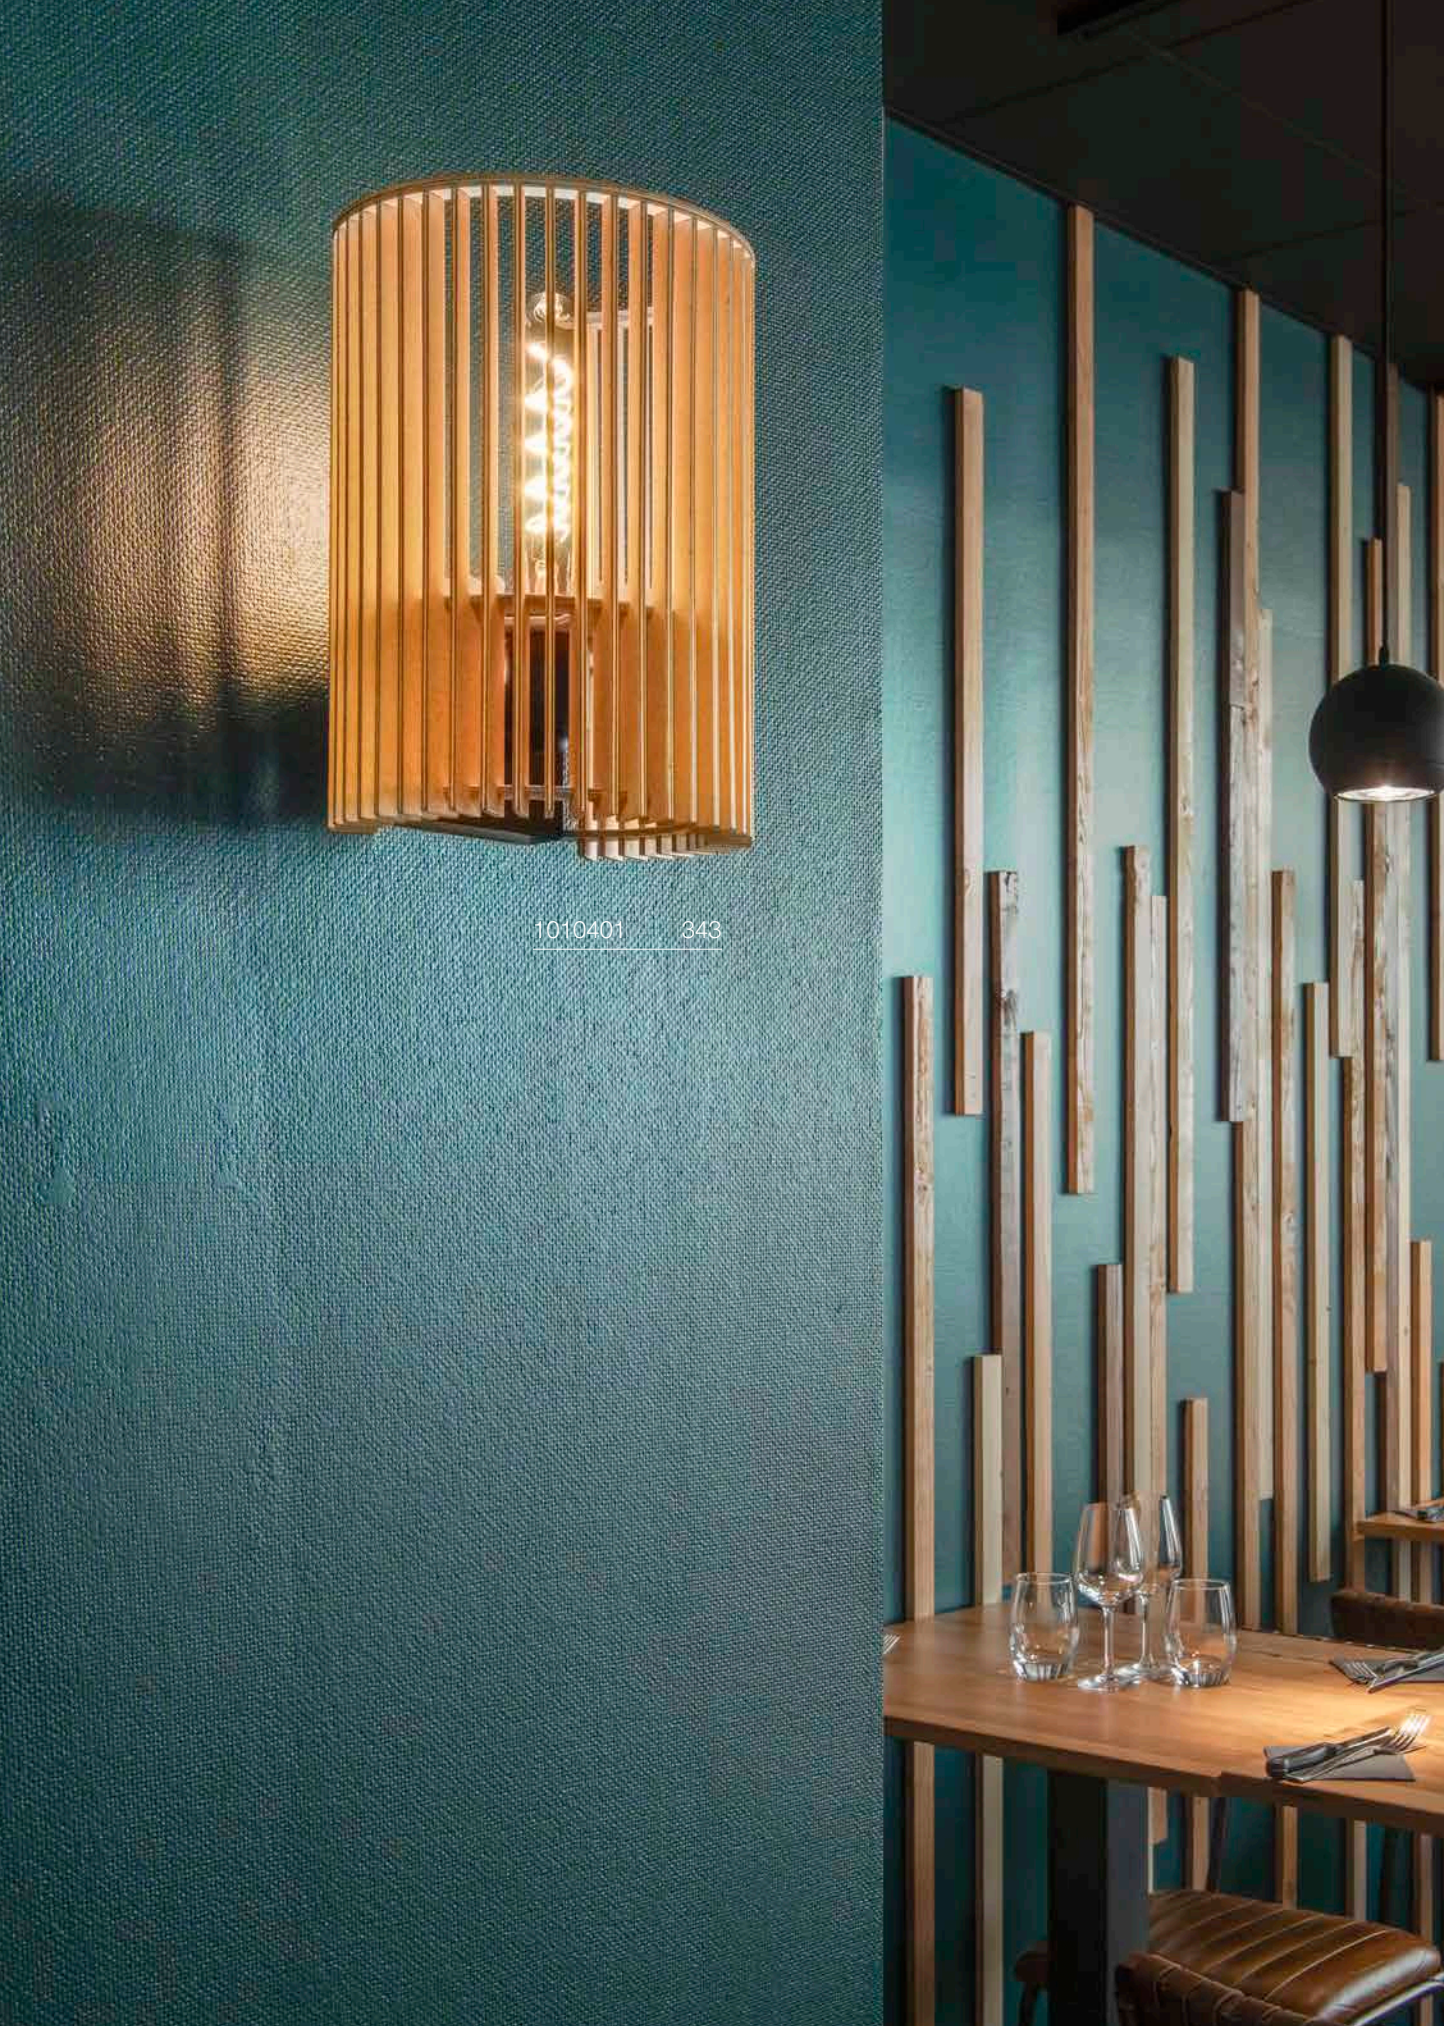


1010401 343



WUD
WL, E27, CYLINDRICAL





IP20 IK02

220-240 V ~50/60 Hz
Material: wood/steel

- Natural material


SOCKET INSIDE 40 W

Base: 1 × E27 | max. Ø: 12 cm | L: 18 cm

Variant	Prod. no.	GBP
brown	**1010401**	**109.00**

E27 | 6 W | 330°
570 lm | 2200 K | EEC = F


Prod. no.: **1008152** **55.00 GBP**

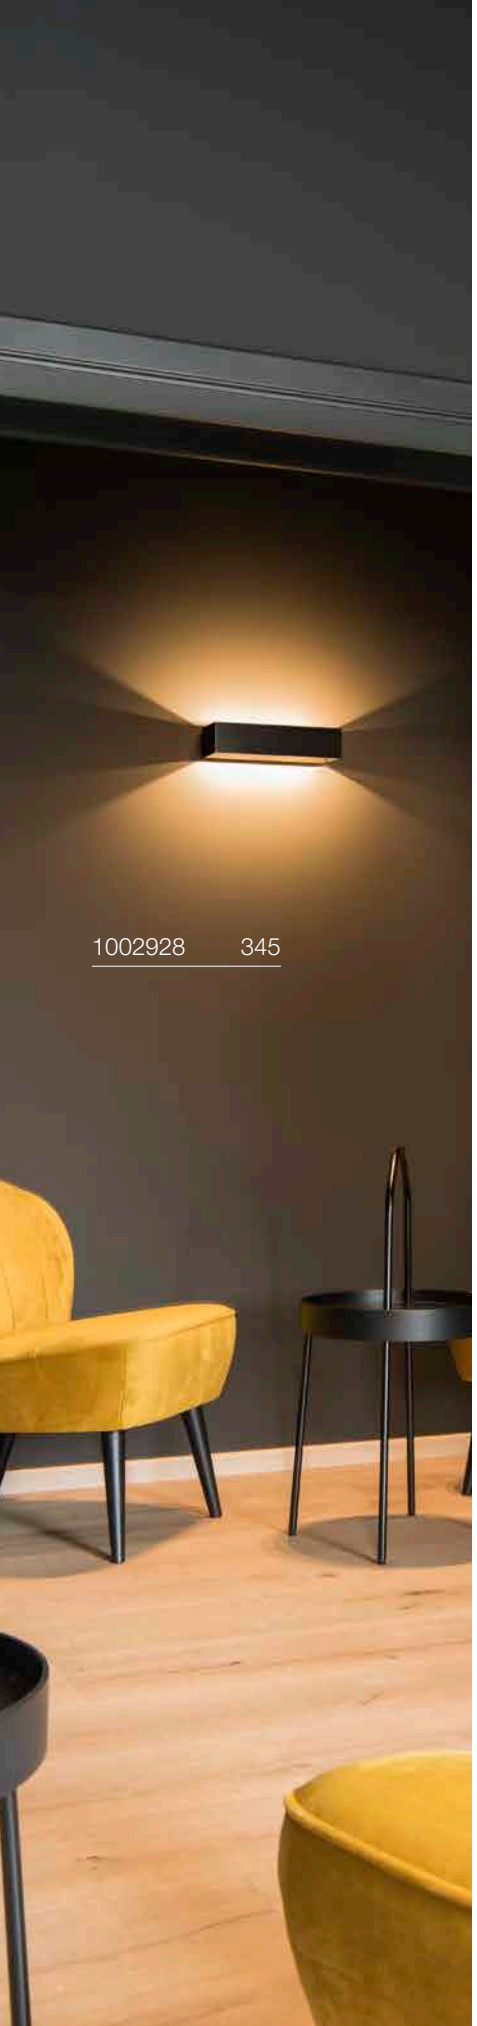

1002928 345

LOGS IN
WL





IP20 30 000 h L70B50


100-240 V ~50/60 Hz | 500 mA
Total wattage: 6 W
Material: aluminium


LED INSIDE CRI 90

	3000 K
151320	300 lm
151321	470 lm

Variant	Prod. no.	GBP
black/gold 300 lm	**151320**	**105.00**
white 470 lm	**151321**	**105.00**

LOGS IN
WL, PHASE





C IP20 30 000 h L70B50

220-240 V ~50/60 Hz | 250 mA
Total wattage: 11 W
Material: aluminium


LED INSIDE DIM TO WARM CRI 90

	2000 K - 3000 K
1000638	43 lm - 430 lm
1000639	69 lm - 690 lm

Variant	Prod. no.	GBP
black/gold 43 lm	**1000638**	**138.00**
white 69 lm	**1000639**	**138.00**

LOGS IN L
WL, PHASE





C,L · IP20 · 30000 h L70B50


220-240 V ~50/60 Hz | 500 mA
Total wattage: 18 W
Material: aluminium


LED INSIDE · CRI 90

	3000 K
1002842	1100 lm
1002844	1600 lm

Variant	Prod. no.	GBP
black/gold 1100 lm	**1002842**	**176.00**
white 1600 lm	**1002844**	**176.00**

LOGS IN L
WL, PHASE





C,L · IP20 · 30000 h L70B50

220-240 V ~50/60 Hz | 500 mA
Total wattage: 21 W
Material: aluminium


LED INSIDE · DIM TO WARM · CRI 90


	2000 K - 3000 K
1002928	100 lm - 1000 lm
1002929	140 lm - 1390 lm

Variant	Prod. no.	GBP
black/gold 100 lm	**1002928**	**239.00**
white 140 lm	**1002929**	**239.00**

LOGS IN L
WL, DALI

NEW





Dali · Touch · IP20 · IK02 · 50000 h L80B20

220-240 V ~50/60 Hz | 500 mA
Total wattage: 20 W
Material: aluminium/steel


LED INSIDE · CRI 90

	3000 K
1011866	2000 lm
1011865	1400 lm

Variant	Prod. no.	GBP
black/gold 1400 lm	**1011865**	**210.00**
white 2000 lm	**1011866**	**210.00**

QUAD FRAME 14
WL







100-240 V ~50/60 Hz | 350 mA
Total wattage: 4.4 W
Material: aluminium




2700 K	3000 K
165 lm	175 lm

Variant	Prod. no.	GBP
○ white	**1003467**	**85.00**

QUAD FRAME 19
WL








220-240 V ~50/60 Hz | 500 mA
Total wattage: 11 W
Material: aluminium



2700 K	3000 K
580 lm	640 lm

Variant	Prod. no.	GBP
○ white	**1003468**	**103.00**

WL 149
WL, QT-DE12



IP20

220-240 V ~50/60 Hz
Material: steel/glass

SOCKET INSIDE 60 W


Base: R7s 78 mm

Variant	Prod. no.	GBP
● black/frosted	**1011748**	**61.00**
○ white/frosted	**149471**	**62.00**

R7s 78 mm | 9 W | 330°
1050 lm | 3000 K | EEC = E

Prod. no.: **1005287** **21.00 GBP**

WL 149
WL, PHASE



C IP20 50000 h L70B50

220-240 V ~50/60 Hz | 250 mA
Total wattage: 10 W
Material: steel/glass


LED INSIDE CRI 90

	3000 K
149511	1080 lm
1011747	600 lm

Variant	Prod. no.	GBP
● black 600 lm	**1011747**	**130.00**
○ white 1080 lm	**149511**	**134.00**

SHELL 30
WL, PHASE





C IP20 IK02 120° 50000 h L70B50

220-240 V ~50/60 Hz | 1300 mA
Total wattage: 50 W
Material: aluminium/acrylic

LED INSIDE

	3000 K
	5650 lm


Variant	Prod. no.	GBP
○ white	**1000423**	**331.00**



151410 349

ASSO 300
WL, PHASE







220-240 V ~50/60 Hz | 500 mA
Total wattage: 12 W
Material: aluminium/steel




3000 K
975 lm

Variant	Prod. no.	GBP
white	**151271**	**193.00**
aluminium/white	**151275**	**201.00**

ASSO 300
WL, PHASE





C,L · IP20 · 30000 h L70B50

220-240 V ~50/60 Hz | 500 mA
Total wattage: 21 W
Material: aluminium/steel


LED INSIDE · DIM TO WARM · CRI 90

2000 K - 3000 K
135 lm - 1340 lm

Variant	Prod. no.	GBP
○ white	**1000634**	**222.00**

OSSA 180
WL, QT-DE12





IP20 · UGR 23

220-240 V ~50/60 Hz
Material: aluminium/steel

SOCKET INSIDE · 100 W

Base: 1 × R7s 78 mm

Variant	Prod. no.	GBP
● black	**151450**	**84.00**
○ white	**151451**	**84.00**


R7s 78 mm | 9 W | 330°
1050 lm | 3000 K | EEC = E

C

Prod. no.: 1005287 21.00 GBP

OSSA 300
WL, QT-DE12





IP20 · UGR 23

220-240 V ~50/60 Hz
Material: aluminium/steel

SOCKET INSIDE · 120 W

Base: 1 × R7s 118 mm

Variant	Prod. no.	GBP
● black	**151410**	**105.00**
○ white	**151411**	**105.00**

R7s 118 mm | 15 W | 330°
2000 lm | 3000 K | EEC = E


C

Prod. no.: 1005288 25.00 GBP


1008071 351

CARISO
WL, PHASE





C IP20 50000h L70B50


220-240 V ~50/60 Hz | 500 mA
Total wattage: 9.8 W
Material: aluminium/steel


LED INSIDE CRI 80

	2700 K	3000 K
	290 lm	630 lm

Variant	Prod. no.	GBP
black/gold 290 lm | 2700 K	**151710**	**151.00**
white 630 lm | 3000 K	**151711**	**147.00**

CARISO
WL, PHASE





C,L IP20 30000h L70B50

220-240 V ~50/60 Hz | 500 mA
Total wattage: 21 W
Material: aluminium/steel


LED INSIDE DIM TO WARM CRI 90

	1700 K	2700 K
151740	58 lm	580 lm
151741	100 lm	1030 lm

Variant	Prod. no.	GBP
black/gold 58 lm | 1700 K	**151740**	**260.00**
white 100 lm | 2000 K	**151741**	**252.00**

CHROMBO
WL, PHASE





C IP20 120° 50000h L70B50

220-240 V ~50/60 Hz | 200 mA
Total wattage: 8 W
Material: steel/glass

LED INSIDE CRI 90

	3000 K
	790 lm


Variant	Prod. no.	GBP
black	**1008071**	**147.00**
white	**1003316**	**147.00**



1004740 353

DIRETO 60
WL, PHASE






220-240 V ~50/60 Hz | 500 mA
Total wattage: 14 W
Material: aluminium

	2700 K	3000 K
Up	590 lm	625 lm
Down	590 lm	625 lm

Variant	Prod. no.	GBP
● black	**1004740**	**184.00**
○ white	**1004741**	**184.00**

DENA 30
WL, E14





220-240 V ~50/60 Hz
Material: aluminium

Base: 2 × E14 | max. Ø: 5.1 cm | L: 9.6 cm


Variant	Prod. no.	GBP
● aluminium	**147529**	**92.00**

E14 | 4 W | 320°
350 lm | 2700 K | EEC = G

Prod. no.: 1005285 8.00 GBP

BASKET
WL, E27





220-240 V ~50/60 Hz
Material: glass


Base: 1 × E27 | max. Ø: 5.2 cm | L: 15.2 cm

Variant	Prod. no.	GBP
○ white	**151591**	**88.00**

E27 | 8 W | 240°
880 lm | 3000 K | EEC = E

Prod. no.: 1005289 10.00 GBP

FITU
WALL BRACKET

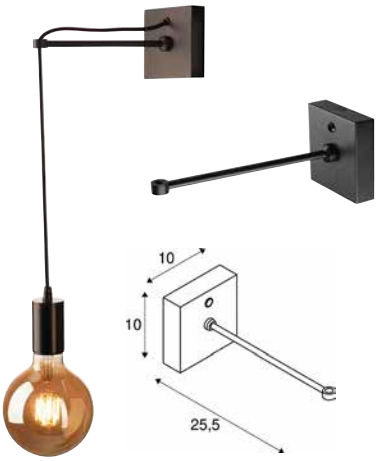


IP20

Material: steel

• See page 258 for matching pendant lights

Variant	Prod. no.	GBP
● black	1004682	56.00

THEO UP/DOWN
WL, QPAR51

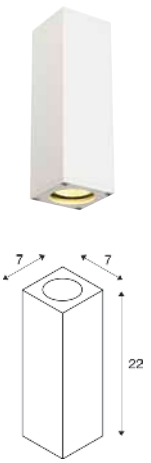

IP20

220-240 V ~50/60 Hz
Material: aluminium

SOCKET INSIDE 50 W

Base: 2xGU10

Variant	Prod. no.	GBP
● anthracite	1000330	96.00
○ white	1000327	96.00
● aluminium	1000329	105.00

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F


Prod. no.: 1005077 7.00 GBP

SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: 1012469 23.00 GBP

SOLID CUBE
WL, QT14

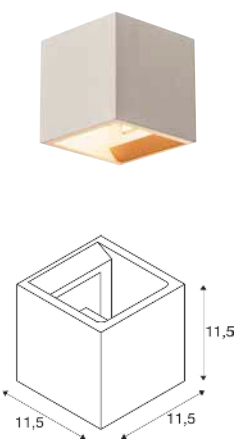

IP20

220-240 V ~50/60 Hz
Material: concrete

SOCKET INSIDE 25 W

Base: 1xG9


Variant	Prod. no.	GBP
● grey	1000910	84.00
● black sandstone	1000911	84.00

G9 | 4 W | 300°
400 lm | 3000 K | EEC = E

Prod. no.: 1005286 8.00 GBP

FENDA
WL, BASE, E27





IP20

220-240 V ~50/60 Hz
Material: steel/plastic

SOCKET INSIDE 40 W

Base: 1 × E27 | max. Ø: 5.1 cm | L: 20 cm

Variant	Prod. no.	GBP
○ white	**1001272**	**46.00**

E27 | 8 W | 240°
880 lm | 3000 K | EEC = E

C

Prod. no.: 1005289 10.00 GBP

⊕

Product	Prod. no.	GBP
Lampshade		
● black	**1001273**	**34.00**
●○ black/copper	**1001274**	**40.00**
○ white	**1001275**	**34.00**
● beige	**1001276**	**34.00**

FENDA
WL, BASE, E27



W: 23 cm
H: 30 cm
Material: textile/steel


Variant	Prod. no.	GBP
●○ black/copper	**1001274**	**40.00**
● black	**1001273**	**34.00**
○ white	**1001275**	**34.00**
● beige	**1001276**	**34.00**

⊕

Product	Prod. no.	GBP
Base		
○ white	**1001272**	**46.00**

KENKUA SPOT
WL, E27





IP20 25° 180° 180° 30000 h L70B50

100-240 V ~50/60 Hz | 700 mA
Total wattage: 2 W
Material: steel/glass

- Light sources can be switched on/off separately at the light.

LED INSIDE SOCKET INSIDE CRI 80 40 W

Base: 1 × E27 | max. Ø: 6.5 cm | L: 12 cm

Spot	3000 K 200 lm


Variant	Prod. no.	GBP
◑ chrome	**1002855**	**189.00**

E27 | 4 W | 280°
830 lm | 2700 K | EEC = A

Prod. no.: 1008641 7.00 GBP

COUPA
WL





IP20 | 50 000 h L70B50

220-240 V ~50/60 Hz | 700 mA
Total wattage: 3.4 W
Material: steel/glass

- Light sources can be switched on/off separately at the light.

LED INSIDE | SOCKET INSIDE | CRI 80 | 42 W

Base: 1 × G69	L: 9 cm

	3000 K
Spot	240 lm


Variant	Prod. no.	GBP
◑ chrome/opaque	**149452**	**180.00**

G9 | 4 W | 300°
450 lm | 2700 K | EEC = E

Prod. no.: **1007455** **8.00 GBP**

KARPO MAGN
CW, SINGLE, PHASE





C | IP20 | 38° | 25 000 h L70B50

220-240 V ~50/60 Hz | 500 mA
Total wattage: 6.2 W
Material: steel/aluminium

- Light head position can be adjusted via the magnetic bracket


LED INSIDE | CRI 90

	3000 K
	350 lm

Variant	Prod. no.	GBP
● black	**1004706**	**172.00**

KARPO GOOSE
WL





Switch | IP20 | 40° | 50 000 h L70B50

220-240 V ~50/60 Hz | 12 V
Total wattage: 6 W
Material: aluminium/steel

- Light can be dimmed via switch on the light head


LED INSIDE | CRI 90

	3000 K
1006161	420 lm
	3000 K
1006162	380 lm

Variant	Prod. no.	GBP
● black 380 lm	**1006162**	**155.00**
○ white 420 lm	**1006161**	**155.00**

KARPO 30
CW, SINGLE





IP20 | 40° | 350° | 90° | 30000 h L70B50


220-240 V ~50/60 Hz | 500 mA
Total wattage: 9.3 W
Material: aluminium/steel

152330	3000 K 560 lm	
152331	3000 K 680 lm	

Variant	Prod. no.	GBP
● black 560 lm	**152330**	**113.00**
○ white 680 lm	**152331**	**113.00**

KARPO 30
WL, SINGLE





IP20 | IK02 | 40° | 350° | 90° | 50000 h L70B50

220-240 V ~50/60 Hz | 500 mA
Total wattage: 5.7 W
Material: aluminium/steel


- Switch on light housing

152340	3000 K 450 lm	
152341	3000 K 470 lm	

Variant	Prod. no.	GBP
● black 450 lm	**152340**	**109.00**
○ white 470 lm	**152341**	**109.00**

KARPO
WL





Switch | IP20 | 40° | 180° | 90° | 30000 h L70B50

220-240 V ~50/60 Hz | 500 mA
Total wattage: 6.8 W
Material: aluminium


- 2 USB connections max. 1.5 A
- 3 dimming levels via switch on base

	3000 K 390 lm	

Variant	Prod. no.	GBP
○ white	**1002140**	**210.00**

SOMNILA SPOT
WL, LEFT





IP20 · 340° · 110° · 36000h L70B50

100-240 V ~50/60 Hz | 12 V
Total wattage: 15 W
Material: aluminium/steel

- 1 USB type-C | 5 V 2.0 A
- Light sources can be switched on/off separately on the housing


LED INSIDE · CRI 90

1003455	Spot	3000 K / 120 lm
	Indirect	3000 K / 370 lm
1003457	Spot	3000 K / 120 lm
	Indirect	3000 K / 650 lm

Variant	Prod. no.	GBP
● black 120 lm	**1003455**	**201.00**
○ white 120 lm	**1003457**	**201.00**

SOMNILA SPOT
WL, RIGHT





IP20 · 340° · 110° · 36000h L70B50

100-240 V ~50/60 Hz | 12 V
Total wattage: 15 W
Material: aluminium/steel

- 1 USB type-C | 5 V 2.0 A
- Light sources can be switched on/off separately on the housing


LED INSIDE · CRI 90

1003456	Spot	3000 K / 120 lm
	Indirect	3000 K / 370 lm
1003458	Spot	3000 K / 120 lm
	Indirect	3000 K / 650 lm

Variant	Prod. no.	GBP
● black 120 lm	**1003456**	**201.00**
○ white 120 lm	**1003458**	**201.00**

SOMNILA FLEX
WL, LEFT





IP20 · 110° · 36000h L70B50

100-240 V ~50/60 Hz | 12 V
Material: aluminium

- Light sources can be switched on/off separately on the housing.


LED INSIDE · CRI 90

	Spot	3000 K / 120 lm

Variant	Prod. no.	GBP
○ white	**1003459**	**210.00**

SOMNILA FLEX
WL, RIGHT





IP20 | 110° | 36000 h L70B50

100-240 V ~50/60 Hz | 12 V
Material: aluminium

- Light sources can be switched on/off separately on the housing.


LED INSIDE | CRI 90

	3000 K
Spot	120 lm

Variant	Prod. no.	GBP
○ white	**1003460**	**210.00**

DIO FLEX PLATE
WL QPAR51





IP20

220-240 V ~50/60 Hz
Material: aluminium

- Switch on light housing

SOCKET INSIDE | 50 W

Base: 1 × GU10

Variant	Prod. no.	GBP
● black	**1002608**	**50.00**
○ white	**1002607**	**50.00**
◑ chrome	**146692**	**58.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F


C,L

Prod. no.: **1005076** **7.00 GBP**

Product	Prod. no.	GBP
Lamp decorative ring Ø 5.7 cm		
◑ chrome	**151049**	**13.00**

DIO FLEX PLATE
WL





IP20 | 45° | 30000 h L70B50

100-240 V ~50/60 Hz | 350 mA
Total wattage: 1.9 W
Material: aluminium

- Switch on light housing

LED INSIDE | CRI 80


	3000 K
1002118	100 lm
	2700 K
1002430	100 lm
	3000 K
1002431	100 lm
	3000 K
146682	100 lm

Variant	Prod. no.	GBP
● black 2700 K	**1002430**	**88.00**
● black 3000 K	**1002431**	**88.00**
○ white 3000 K	**1002118**	**88.00**
◑ chrome 3000 K	**146682**	**92.00**


1002608 359
Gardenia

PHELIA
WL, QPAR51





IP20 | 350° | 90°

220-240 V ~50/60 Hz
Material: aluminium/steel

- Switch on lamp head

SOCKET INSIDE | 10 W

Base: 1 × GU10 max. Ø: 5.1 cm | L: 10.5 cm

Variant	Prod. no.	GBP
● black	**148540**	**113.00**


GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

C,L

Prod. no.: 1005077 7.00 GBP

MERADO FLOOD
WL, PHASE





C | IP20 | 360° | 90° | 40000 h L70B50 | 200

220-240 V ~50/60 Hz | 1000 mA
Total wattage: 40 W
Material: aluminium


LED INSIDE | CRI 80

	4000 K
1001472	3200 lm
	3000 K
1001468	3000 lm

Variant	Prod. no.	GBP
○ white 3000 lm | 3000 K	**1001468**	**214.00**
○ white 3200 lm | 4000 K	**1001472**	**214.00**

DISPLAY ADL 50
QPAR51





IP20 | 200° | 90° | 30

220-240 V ~50/60 Hz
Material: aluminium/brass

- open cable end

SOCKET INSIDE | 50 W


Base: 1 × GU10

Variant	Prod. no.	GBP
○ white	**1002860**	**43.00**
◑ chrome	**146332**	**55.00**

GU10 | 6 W | 38°
470 lm | 3000 K | EEC = F

C,L

Prod. no.: 1005079 7.00 GBP

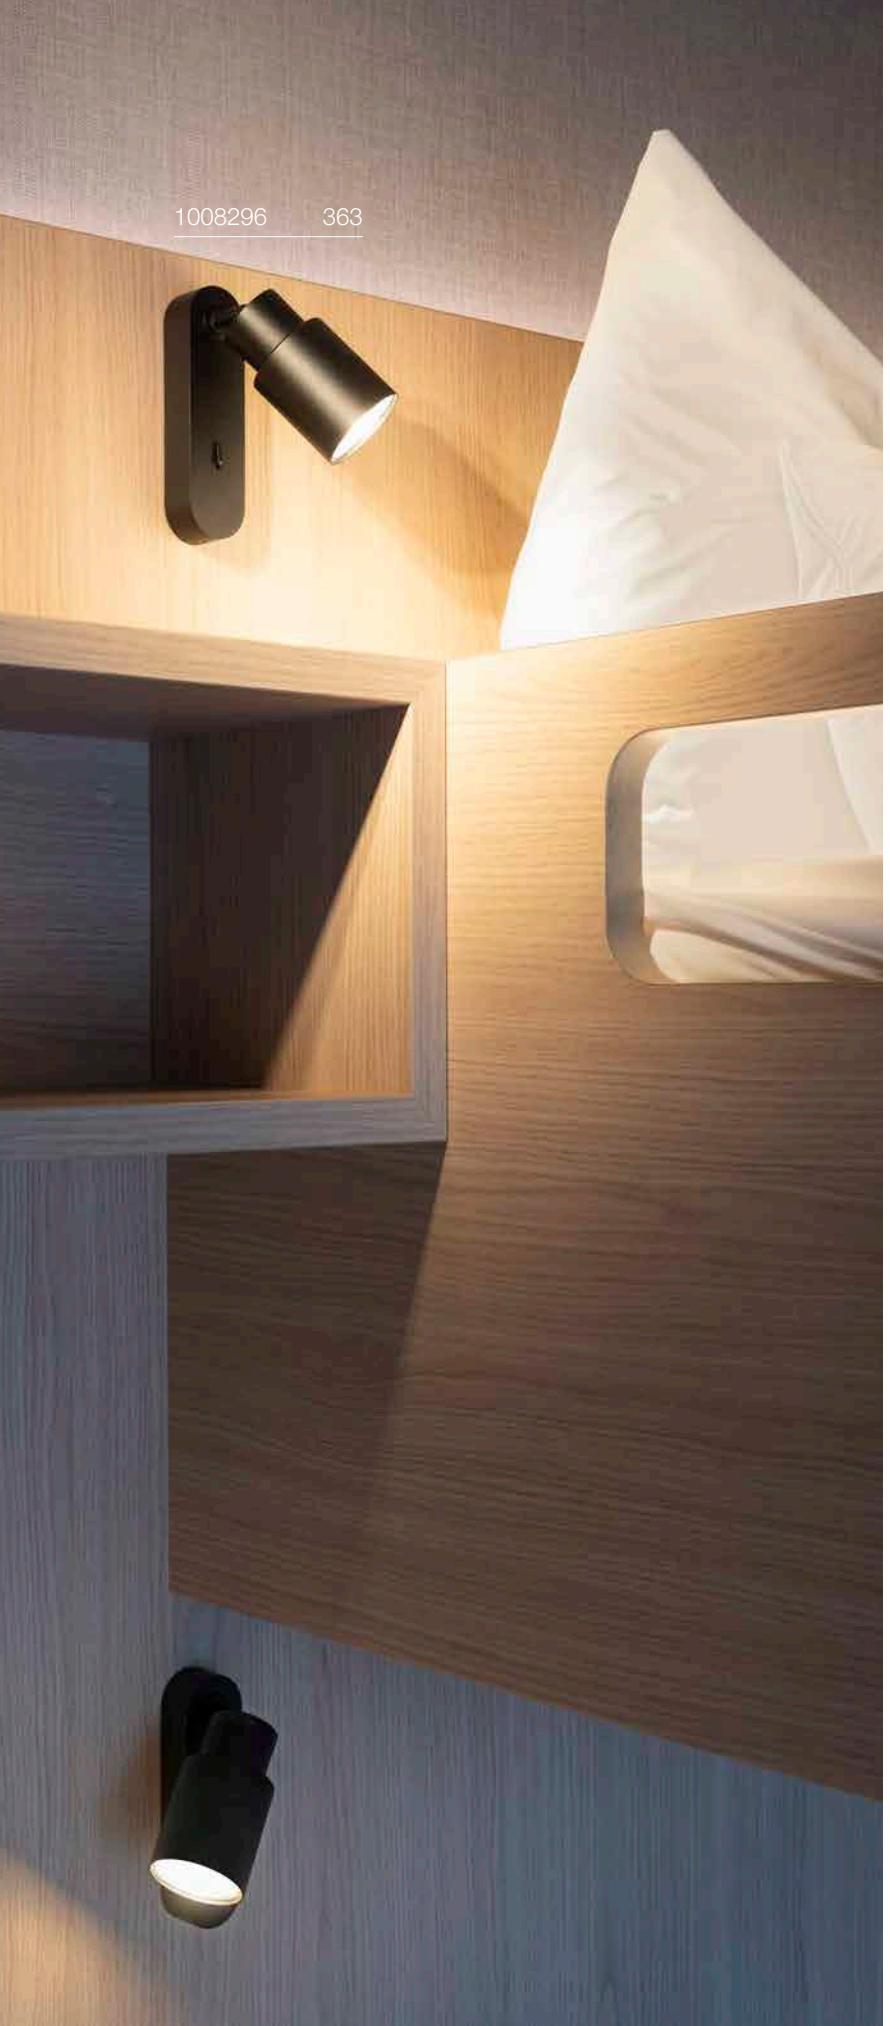

PURI 2.0 TUBE
CW, QPAR51

IP20 IK02 350° 90°

220-240 V ~50/60 Hz
Material: aluminium

SOCKET INSIDE 6 W

Base: 1-4 × GU10 max. Ø: 5.1 cm | L: 5.5 cm

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

C,L

Prod. no.: **1005076** **7.00 GBP**


SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: **1012469** **23.00 GBP**

PURI 2.0 TUBE
CW, DOUBLE LONG, QPAR51






Variant	Prod. no.	GBP
black	1008361	69.00
black/gold	1008362	69.00
white	1008363	69.00
grey	1008364	69.00

PURI 2.0 TUBE
CW, SINGLE, QPAR51






Variant	Prod. no.	GBP
black	1008284	41.00
black/gold	1008285	41.00
white	1008286	41.00
grey	1008287	41.00

PURI 2.0 TUBE
CW, SWITCH, SINGLE, QPAR51






Variant	Prod. no.	GBP
black	1008296	48.00
black/gold	1008297	48.00
white	1008298	48.00
grey	1008299	48.00

PURI 2.0 TUBE
CW, DOUBLE ASYM., QPAR51






Variant	Prod. no.	GBP
black	1008308	82.00
black/gold	1008309	82.00
white	1008310	82.00
grey	1008311	82.00

PURI 2.0 TUBE
CW, TRIPLE LONG, QPAR51






Variant	Prod. no.	GBP
black	1008320	105.00
black/gold	1008321	105.00
white	1008322	105.00
grey	1008323	105.00

PURI 2.0 TUBE
CW, TRIPLE ROUND, QPAR51






Variant	Prod. no.	GBP
black	1008332	121.00
black/gold	1008333	121.00
white	1008334	121.00
grey	1008335	121.00

PURI 2.0 TUBE
CW, QUADRUPLE LONG, QPAR51





Variant	Prod. no.	GBP
black	1008344	147.00
black/gold	1008345	147.00
white	1008346	147.00
grey	1008347	147.00



1008350 + 1008219 365 + 369

PURI 2.0 CONE
CW, QPAR51

IP20 IK02 350° 90°

220-240 V ~50/60 Hz
Material: aluminium

SOCKET INSIDE 6 W

Base: 1-4 × GU10 max. Ø: 5.1 cm | L: 5.5 cm

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

C,L

Prod. no.: **1005076** **7.00 GBP**


SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: **1012469** **23.00 GBP**

PURI 2.0 CONE
CW, DOUBLE LONG, QPAR51






Variant	Prod. no.	GBP
black	1008365	69.00
black/gold	1008366	69.00
white	1008367	69.00
grey	1008368	69.00

PURI 2.0 CONE
CW, SINGLE, QPAR51






Variant	Prod. no.	GBP
black	1008288	41.00
black/gold	1008289	41.00
white	1008290	41.00
grey	1008291	41.00

PURI 2.0 CONE
CW, SWITCH, SINGLE, QPAR51






Variant	Prod. no.	GBP
black	1008300	48.00
black/gold	1008301	48.00
white	1008302	48.00
grey	1008303	48.00

PURI 2.0 CONE
CW, DOUBLE ASYM., QPAR51






Variant	Prod. no.	GBP
black	1008312	82.00
black/gold	1008313	82.00
white	1008314	82.00
grey	1008315	82.00

PURI 2.0 CONE
CW, TRIPLE LONG, QPAR51






Variant	Prod. no.	GBP
black	1008324	105.00
black/gold	1008325	105.00
white	1008326	105.00
grey	1008327	105.00

PURI 2.0 CONE
CW, TRIPLE ROUND, QPAR51






Variant	Prod. no.	GBP
black	1008336	121.00
black/gold	1008337	121.00
white	1008338	121.00
grey	1008339	121.00

PURI 2.0 CONE
CW, QUADRUPLE LONG, QPAR51





Variant	Prod. no.	GBP
black	1008348	147.00
black/gold	1008349	147.00
white	1008350	147.00
grey	1008351	147.00



PURI 2.0 DOME
CW, QPAR51

IP20 IK02 350° 90°

220-240 V ~50/60 Hz
Material: aluminium

SOCKET INSIDE 6 W

Base: 1-4 × GU10 max. Ø: 5.1 cm | L: 5.5 cm

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

C,L

Prod. no.: 1005076 7.00 GBP


SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: 1012469 23.00 GBP

PURI 2.0 DOME
CW, DOUBLE LONG, QPAR51






Variant	Prod. no.	GBP
black	1008369	69.00
black/gold	1008370	69.00
white	1008371	69.00
grey	1008372	69.00

PURI 2.0 DOME
CW, SINGLE, QPAR51






Variant	Prod. no.	GBP
black	1008292	41.00
black/gold	1008293	41.00
white	1008294	41.00
grey	1008295	41.00

PURI 2.0 DOME
CW, SWITCH, SINGLE, QPAR51






Variant	Prod. no.	GBP
black	1008304	48.00
black/gold	1008305	48.00
white	1008306	48.00
grey	1008307	48.00

PURI 2.0 DOME
CW, DOUBLE ASYM., QPAR51






Variant	Prod. no.	GBP
black	1008316	82.00
black/gold	1008317	82.00
white	1008318	82.00
grey	1008319	82.00

PURI 2.0 DOME
CW, TRIPLE LONG, QPAR51






Variant	Prod. no.	GBP
black	1008328	105.00
black/gold	1008329	105.00
white	1008330	105.00
grey	1008331	105.00

PURI 2.0 DOME
CW, TRIPLE ROUND, QPAR51






Variant	Prod. no.	GBP
black	1008340	121.00
black/gold	1008341	121.00
white	1008342	121.00
grey	1008343	121.00

PURI 2.0 DOME
CW, QUADRUPLE LONG, QPAR51





Variant	Prod. no.	GBP
black	1008352	147.00
black/gold	1008353	147.00
white	1008354	147.00
grey	1008355	147.00


1008318 + 1008221 367 + 369

PURI 2.0 TUBE
SHADE



Ø: 5.5 cm
H: 6.5 cm
Material: aluminium

Variant	Prod. no.	GBP
black	1008214	8.00
white	1008213	8.00
gold	1008216	8.00
grey	1008215	8.00
bronze	1008217	8.00
aluminium	1008376	8.00

PURI 2.0 CONE
SHADE



Ø: 5.5 cm
H: 6.5 cm
Material: aluminium

Variant	Prod. no.	GBP
black	1008219	8.00
white	1008218	8.00
gold	1008221	8.00
grey	1008220	8.00
bronze	1008222	8.00
aluminium	1008377	8.00

PURI 2.0 DOME
SHADE




Ø: 5.5 cm
H: 6.5 cm
Material: aluminium

Variant	Prod. no.	GBP
black	1008224	8.00
white	1008223	8.00
gold	1008226	8.00
grey	1008225	8.00
bronze	1008227	8.00
aluminium	1008378	8.00



NOBLO®
CW, SINGLE, PHASE, DTW





C · IP20 · 36° · 355° · 90° · 40000 h L70B50

220-240 V ~50/60 Hz | 350 mA
Total wattage: 8 W
Material: aluminium/steel

LED INSIDE · DIM TO WARM · CRI 90


Down	2000 K - 3000 K
	10 lm - 450 lm

Variant	Prod. no.	GBP
● black	1008706	102.00
○ white	1008703	102.00

Product	Prod. no.	GBP
Decorative ring		
● black	1008482	6.00
○ white	1008483	6.00
● gold	1008484	6.00
● grey	1008485	6.00
● bronze	1008486	6.00
● copper	1008487	6.00

NOBLO®
CW, DOUBLE, PHASE, DTW





C,L · IP20 · 36° · 355° · 90° · 40000 h L70B50

220-240 V ~50/60 Hz | 350 mA
Total wattage: 15 W
Material: aluminium/steel

LED INSIDE · DIM TO WARM · CRI 90


Down	2000 K - 3000 K
	10 lm - 940 lm

Variant	Prod. no.	GBP
● black	1008707	163.00
○ white	1008704	163.00

Product	Prod. no.	GBP
Decorative ring		
● black	1008482	6.00
○ white	1008483	6.00
● gold	1008484	6.00
● grey	1008485	6.00
● bronze	1008486	6.00
● copper	1008487	6.00

NOBLO®
CW, TRIPLE, PHASE, DTW





C,L · IP20 · 36° · 355° · 90° · 40000 h L70B50

220-240 V ~50/60 Hz | 350 mA
Total wattage: 22 W
Material: aluminium/steel

LED INSIDE · DIM TO WARM · CRI 90

Down	2000 K - 3000 K
	10 lm - 1360 lm


Variant	Prod. no.	GBP
● black	1008708	240.00
○ white	1008705	240.00

Product	Prod. no.	GBP
Decorative ring		
● black	1008482	6.00
○ white	1008483	6.00
● gold	1008484	6.00
● grey	1008485	6.00
● bronze	1008486	6.00
● copper	1008487	6.00


KoLA
DINOS

NOBLO®
CW, SINGLE, PHASE





C · IP20 · 32° · 355° · 90° · 50000 h L80B10

220-240 V ~50/60 Hz | 150 mA
Total wattage: 6 W
Material: aluminium/steel

LED INSIDE · CRI 90

1008709 **1008712**	Down	3000 K 750 lm	
1008715 **1008718**	Down	2700 K 740 lm	


Variant	Prod. no.	GBP
● black 750 lm | 3000 K	**1008712**	**102.00**
● black 740 lm | 2700 K	**1008718**	**102.00**
○ white 750 lm | 3000 K	**1008709**	**102.00**
○ white 740 lm | 2700 K	**1008715**	**102.00**

⊕

Product	Prod. no.	GBP
Decorative ring		
● black	**1008482**	**6.00**
○ white	**1008483**	**6.00**
● gold	**1008484**	**6.00**
● grey	**1008485**	**6.00**
● bronze	**1008486**	**6.00**
● copper	**1008487**	**6.00**

NOBLO®
CW, DOUBLE, PHASE





C,L · IP20 · 32° · 355° · 90° · 50000 h L80B10

220-240 V ~50/60 Hz | 300 mA
Total wattage: 12 W
Material: aluminium/steel

LED INSIDE · CRI 90

1008710 **1008713**	Down	3000 K 1460 lm	
1008716 **1008719**	Down	2700 K 1450 lm	


Variant	Prod. no.	GBP
● black 1460 lm | 3000 K	**1008713**	**163.00**
● black 1450 lm | 2700 K	**1008719**	**163.00**
○ white 1460 lm | 3000 K	**1008710**	**163.00**
○ white 1450 lm | 2700 K	**1008716**	**163.00**

⊕

Product	Prod. no.	GBP
Decorative ring		
● black	**1008482**	**6.00**
○ white	**1008483**	**6.00**
● gold	**1008484**	**6.00**
● grey	**1008485**	**6.00**
● bronze	**1008486**	**6.00**
● copper	**1008487**	**6.00**

NOBLO®
CW, TRIPLE, PHASE





C,L · IP20 · 32° · 355° · 90° · 50000 h L80B10

220-240 V ~50/60 Hz | 500 mA
Total wattage: 19 W
Material: aluminium/steel

LED INSIDE · CRI 90

1008711 **1008714**	Down	3000 K 2360 lm	
1008717 **1008720**	Down	2700 K 2350 lm	


Variant	Prod. no.	GBP
● black 2360 lm | 3000 K	**1008714**	**240.00**
● black 2350 lm | 2700 K	**1008720**	**240.00**
○ white 2360 lm | 3000 K	**1008711**	**240.00**
○ white 2350 lm | 2700 K	**1008717**	**240.00**

⊕

Product	Prod. no.	GBP
Decorative ring		
● black	**1008482**	**6.00**
○ white	**1008483**	**6.00**
● gold	**1008484**	**6.00**
● grey	**1008485**	**6.00**
● bronze	**1008486**	**6.00**
● copper	**1008487**	**6.00**

KALU 2.0
CW, SINGLE, PHASE





IP20 IK02 36° 270° 90° 50 000 h L90B10 UGR 19

220-240 V ~50/60 Hz | 250 mA
Total wattage: 10 W
Material: aluminium

- Discover more lenses and decorative rings in the accessories section

LED INSIDE CRI 90

1010258 **1010260**	Down	2700 K 1400 lm	
1010261 **1010263**	Down	3000 K 1450 lm	


Variant	Prod. no.	GBP
● black 1400 lm | 2700 K	**1010258**	**101.00**
● black 1450 lm | 3000 K	**1010261**	**101.00**
○ white 1400 lm | 2700 K	**1010260**	**101.00**
○ white 1450 lm | 3000 K	**1010263**	**101.00**

⊕

Product	Prod. no.	GBP
Decorative ring		
○ white	**1010135**	**8.00**
● black	**1010136**	**8.00**
● gold	**1010138**	**8.00**
● copper	**1010139**	**8.00**
Lens		
○ transparent 15°	**1010140**	**17.00**
○ transparent 24°	**1010141**	**17.00**
○ transparent 36°	**1010142**	**17.00**
○ transparent 60°	**1010143**	**17.00**

KALU 2.0
CW, DOUBLE LONG, PHASE





IP20 IK02 36° 270° 90° 50 000 h L90B10 UGR 19

220-240 V ~50/60 Hz | 500 mA
Total wattage: 19 W
Material: aluminium

- Discover more lenses and decorative rings in the accessories section

LED INSIDE CRI 90

1010264 **1010266**	Down	2700 K 1350 lm	2700 K 1350 lm
1010267 **1010269**	Down	3000 K 1400 lm	3000 K 1400 lm


Variant	Prod. no.	GBP
● black 2 × 1350 lm | 2700 K	**1010264**	**178.00**
● black 2 × 1400 lm | 3000 K	**1010267**	**178.00**
○ white 2 × 1350 lm | 2700 K	**1010266**	**178.00**
○ white 2 × 1400 lm | 3000 K	**1010269**	**178.00**

⊕

Product	Prod. no.	GBP
Decorative ring		
○ white	**1010135**	**8.00**
● black	**1010136**	**8.00**
● gold	**1010138**	**8.00**
● copper	**1010139**	**8.00**
Lens		
○ transparent 15°	**1010140**	**17.00**
○ transparent 24°	**1010141**	**17.00**
○ transparent 36°	**1010142**	**17.00**
○ transparent 60°	**1010143**	**17.00**

KALU 2.0
CW, TRIPLE LONG, PHASE





IP20 IK02 36° 270° 90° 50 000 h L90B10 UGR 19

220-240 V ~50/60 Hz | 750 mA
Total wattage: 28 W
Material: aluminium

- Discover more lenses and decorative rings in the accessories section

LED INSIDE CRI 90

1010270 **1010272**	Down	2700 K 1350 lm	2700 K 1350 lm	2700 K 1350 lm
1010273 **1010275**	Down	3000 K 1400 lm	3000 K 1400 lm	3000 K 1400 lm


Variant	Prod. no.	GBP
● black 3 × 1350 lm | 2700 K	**1010270**	**254.00**
● black 3 × 1400 lm | 3000 K	**1010273**	**254.00**
○ white 3 × 1350 lm | 2700 K	**1010272**	**254.00**
○ white 3 × 1400 lm | 3000 K	**1010275**	**254.00**

⊕

Product	Prod. no.	GBP
Decorative ring		
○ white	**1010135**	**8.00**
● black	**1010136**	**8.00**
● gold	**1010138**	**8.00**
● copper	**1010139**	**8.00**
Lens		
○ transparent 15°	**1010140**	**17.00**
○ transparent 24°	**1010141**	**17.00**
○ transparent 36°	**1010142**	**17.00**
○ transparent 60°	**1010143**	**17.00**

PANTILO ROPE 19
CW, E27





IP20

220-240 V ~50/60 Hz
Material: glass

SOCKET INSIDE 15 W

Base: 1 × E27	max. Ø: 10 cm	L: 11 cm


Variant	Prod. no.	GBP
gold	1007592	138.00
silver	1007593	138.00

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F

Prod. no.: 1005303 9.00 GBP

PANTILO ROPE 27
CW, E27





IP20

220-240 V ~50/60 Hz
Material: glass

SOCKET INSIDE 15 W

Base: 1 × E27	max. Ø: 15 cm	L: 11 cm

Variant	Prod. no.	GBP
gold	1007591	172.00
silver	1007590	172.00

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F

Prod. no.: 1005303 9.00 GBP

SMART


E27 | 9 W | 180°
806 lm | 2700 K | EEC = F

Prod. no.: 1012471 14.00 GBP

MOTUNA
CW, PHASE

NEW





C IP20 130° 50000 h L80B20

220-240 V ~50/60 Hz | 250 mA
Total wattage: 10 W
Power consumption: 8
Material: aluminium

LED INSIDE CRI 90

1010217	2700 K	750 lm
1010365	2700 K	1000 lm

Variant	Prod. no.	GBP
black/gold 750 lm	1010217	172.00
white/gold 1000 lm	1010365	172.00




1008024 376

1007608 377

CYFT WAVE
CW, PHASE







220-240 V ~50/60 Hz | 500 mA
Total wattage: 6.5 W
Material: aluminium/acrylic

- Suitable for outdoor use




1008024 Indirect	2700 K	3000 K	4000 K
	240 lm	260 lm	280 lm
1008941	2700 K	3000 K	4000 K
	230 lm	250 lm	250 lm

Variant	Prod. no.	GBP
● black/clear 240 lm	**1008024**	**172.00**
● black/amber 230 lm	**1008941**	**172.00**

CYFT
CW, PHASE







220-240 V ~50/60 Hz | 500 mA
Total wattage: 6.5 W
Material: aluminium/acrylic




	2700 K	3000 K	4000 K
Indirect	330 lm	350 lm	380 lm

Variant	Prod. no.	GBP
● black	**1007608**	**172.00**

CYFT DOME
CW, PHASE







220-240 V ~50/60 Hz | 500 mA
Total wattage: 6.5 W
Material: aluminium/glass

• Suitable for outdoor use



2700 K	3000 K	4000 K
290 lm	310 lm	310 lm

Variant	Prod. no.	GBP
● black/opaque	**1008944**	**172.00**

CYFT
DECORATIVE RING



Ø: 13.1 cm
H: 2.5 cm
Material: steel


• Grate ring suitable for outdoor use

Variant	Prod. no.	GBP
○ white	**1007611**	**16.00**
● brass	**1007610**	**26.00**
◑ chrome	**1007609**	**22.00**
● bronze	**1008025**	**26.00**
● rust	**1008943**	**26.00**
● nickel	**1008026**	**22.00**


1010210 379

CYFT XL
CW, PHASE





IP65 IK05 125° 50000 h L70B50 50

220-240 V ~50/60 Hz | 500 mA
Total wattage: 15 W
Material: aluminium/glass

- Suitable for outdoor use


LED INSIDE CCT CRI 90

2700 K	3000 K	4000 K
810 lm	920 lm	930 lm

Variant	Prod. no.	GBP
● black	**1010210**	**218.00**

CYFT WAVE XL
CW, PHASE





IP65 IK05 105° 50000 h L70B50 50

220-240 V ~50/60 Hz | 500 mA
Total wattage: 15 W
Material: aluminium/glass

- Suitable for outdoor use

LED INSIDE CCT CRI 90

2700 K	3000 K	4000 K
850 lm	950 lm	960 lm

Variant	Prod. no.	GBP
● black	**1010211**	**218.00**

CYFT XL
DECORATIVE RING



Ø: 20 cm
H: 2.3 cm
Material: aluminium

- Grate ring suitable for outdoor use

Variant	Prod. no.	GBP
○ white	**1010213**	**35.00**
● brass	**1010214**	**35.00**
◑ chrome	**1010215**	**35.00**
● rust	**1010212**	**35.00**



ASTO TUBE
CW, GU10

IP20 350° 90°

220-240 V ~50/60 Hz | 500 mA
Total wattage: 15 W
Material: aluminium/glass

- Decorative rings available as accessory

SOCKET INSIDE 10 W

Base: 1-4 × GU10

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

C,L

Prod. no.: **1005077** **7.00 GBP**


SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F

Prod. no.: **1012469** **23.00 GBP**

ASTO TUBE
CW, SINGLE, GU10






Variant	Prod. no.	GBP
● black	**1006423**	**43.00**
○ white	**1006424**	**43.00**

ASTO TUBE
CW, DOUBLE, GU10





Variant	Prod. no.	GBP
● black	**1006425**	**82.00**
○ white	**1006426**	**82.00**

ASTO TUBE
DECORATIVE REFLECTOR




Ø: 6.8 cm
H: 4 cm
Material: polycarbonate (PC)

Variant	Prod. no.	GBP
◐ black/chrome	**1007190**	**4.00**
● gold	**1006450**	**4.00**
◐ chrome	**1006449**	**4.00**
● copper	**1006451**	**4.00**

ASTO TUBE
CW, TRIPLE, GU10






Variant	Prod. no.	GBP
● black	**1006427**	**117.00**
○ white	**1006428**	**117.00**

ASTO TUBE
CW, QUADRUPLE, GU10





Variant	Prod. no.	GBP
● black	**1006429**	**142.00**
○ white	**1006430**	**142.00**


007

KALU
CW, QPAR111

IP20 350° 90°

220-240 V ~50/60 Hz
Material: aluminium

SOCKET INSIDE 75 W

Base: 1-4 × GU10


GU10 | 12 W | 55°
670 lm | 2700 K | EEC = G

C,L

Prod. no.: **1005297** **73.00 GBP**

KALU
CW, SINGLE, QPAR111






Variant	Prod. no.	GBP
● black	**1000702**	**66.00**
○ white	**147301**	**66.00**
● aluminium	**147306**	**68.00**

KALU
CW, DOUBLE, QPAR111






Variant	Prod. no.	GBP
● black	**1000703**	**130.00**
○ white	**147311**	**130.00**
● aluminium	**147316**	**138.00**

KALU
CW, TRIPLE, QPAR111






Variant	Prod. no.	GBP
● black	**1000704**	**180.00**
○ white	**147321**	**180.00**
● aluminium	**147326**	**189.00**

KALU
CW, QUAD, QPAR111






Variant	Prod. no.	GBP
● black	**1002023**	**252.00**
○ white	**1002024**	**252.00**
● aluminium	**1002025**	**260.00**


132020 385

ALTRA DICE
CW, DOUBLE, QPAR51





IP20 350° 180°

220-240 V ~50/60 Hz
Material: aluminium/steel

SOCKET INSIDE 50 W

Base: 2 × GU10


Variant	Prod. no.	GBP
○ white	**151531**	**100.00**

GU10 | 6 W | 36°
360 lm | 2200 K-2700 K | EEC = G

Prod. no.: 1005273 9.00 GBP

SPOT 79
CW, QPAR51





IP20 350° 180°

220-240 V ~50/60 Hz
Material: aluminium

SOCKET INSIDE 50 W

Base: 1 × GU10 max. Ø: 5.1 cm | L: 5.7 cm

Variant	Prod. no.	GBP
● black	**132020**	**29.00**
○ white	**132021**	**29.00**
● grey	**132024**	**29.00**

GU10 | 6 W | 38°
450 lm | 2700 K | EEC = F

Prod. no.: 1005077 7.00 GBP

SMART

GU10 | 5 W | 45°
350 lm | 2700 K-6500 K | EEC = F


Prod. no.: 1012469 23.00 GBP




SENSER 2.0 12
CW, ROUND/SQUARE, PHASE

NEW









220-240 V ~50/60 Hz | 350 mA
Total wattage: 7.2 W
Material: aluminium/plastic PC




	3000 K	4000 K
1012214 Down	500 lm	500 lm
1012213 Down	550 lm	600 lm


Variant	Prod. no.	GBP
○ white, round	**1012213**	**60.00**
○ white, square	**1012214**	**60.00**

SENSER 2.0 18
CW, ROUND/SQUARE, PHASE

NEW







C IP20 IK02 90° 50000 h L80B10

220-240 V ~50/60 Hz | 500 mA
Total wattage: 14 W
Material: aluminium/plastic PC

INSIDE CCT CRI 90


1012216 Down	3000 K 1300 lm	4000 K 1350 lm
1012215 Down	3000 K 1250 lm	4000 K 1350 lm


Variant	Prod. no.	GBP
○ white, round	**1012215**	**77.00**
○ white, square	**1012216**	**77.00**

SENSER 2.0 24
CW, ROUND/SQUARE, PHASE

NEW







C IP20 IK02 90° 50000 h L80B10 UGR 25

220-240 V | 700 mA
Total wattage: 23 W
Material: aluminium/plastic PC

INSIDE CCT CRI 90


Down	3000 K 2250 lm	4000 K 2400 lm


Variant	Prod. no.	GBP
○ white, round	**1012217**	**96.00**
○ white, square	**1012218**	**96.00**

SENSER 2.0 30
CW, ROUND/SQUARE, PHASE

NEW







C IP20 IK02 90° 50000 h L80B10 UGR 22

220-240 V ~50/60 Hz | 700 mA
Total wattage: 28 W
Material: aluminium/plastic PC

INSIDE CCT CRI 90


1012220 Down	3000 K 2650 lm	4000 K 2800 lm
1012219 Down	3000 K 2700 lm	4000 K 2900 lm


Variant	Prod. no.	GBP
○ white, round	**1012219**	**113.00**
○ white, square	**1012220**	**113.00**

SENSER 2.0 12
CW, ROUND/SQUARE, DALI

NEW









Dali IP20 IK02 90° 50000h L80B10

220-240 V ~50/60 Hz | 350 mA
Total wattage: 7 W
Material: aluminium/plastic PC

LED INSIDE CCT CRI 90


1012222 Down	3000 K 500 lm	4000 K 500 lm
1012221 Down	3000 K 550 lm	4000 K 600 lm


Variant	Prod. no.	GBP
○ white, round	**1012221**	**96.00**
○ white, square	**1012222**	**96.00**

SENSER 2.0 18
CW, ROUND/SQUARE, DALI

NEW







Dali IP20 IK02 90° 50000 h L80B10

220-240 V ~50/60 Hz | 500 mA
Total wattage: 13 W
Material: aluminium/plastic PC

INSIDE CCT CRI 90


	3000 K	4000 K
1012224 Down	1300 lm	1350 lm
1012223 Down	1250 lm	1350 lm


Variant	Prod. no.	GBP
○ white, round	**1012223**	**113.00**
○ white, square	**1012224**	**113.00**

SENSER 2.0 24
CW, ROUND/SQUARE, DALI

NEW







Dali IP20 IK02 90° 50000 h L80B10 UGR 25

220-240 V | 700 mA
Total wattage: 23 W
Material: aluminium/plastic PC

INSIDE CCT CRI 90


	3000 K	4000 K
Down	2250 lm	2400 lm


Variant	Prod. no.	GBP
○ white, round	**1012225**	**130.00**
○ white, square	**1012226**	**130.00**

SENSER 2.0 30
CW, ROUND/SQUARE, DALI

NEW







Dali IP20 IK02 90° 50000 h L80B10 UGR 22

220-240 V ~50/60 Hz | 700 mA
Total wattage: 27 W
Material: aluminium/plastic PC


INSIDE CCT CRI 90

	3000 K	4000 K
1012228 Down	2650 lm	2800 lm
1012227 Down	2700 lm	2900 lm

Variant	Prod. no.	GBP
○ white, round	**1012227**	**147.00**
○ white, square	**1012228**	**147.00**

LIPSY® 2.0 30
CW, DOME





IP44 IK02 120° 50000h L80B10 UGR 25

220-240 V ~50/60 Hz | 160 / 230 mA
Total wattage: 7.1 W / 11 W
Material: steel/PMMA


LED INSIDE CCT CRI 80

	3000 K	4000 K
7.1 W	900 lm	950 lm
11 W	1250 lm	1300 lm

Variant	Prod. no.	GBP
○ white/opaque	**1012182** ●	**68.00**

LIPSY® 2.0 30
CW, HF, DOME





IP44 IK02 120° 50000h L80B10 UGR 25 FR


220-240 V ~50/60 Hz | 200 mA
Total wattage: 13 W
Material: steel/PMMA


LED INSIDE CCT CRI 80

	3000 K	4000 K
Down	1400 lm	1500 lm

Variant	Prod. no.	GBP
○ white/opaque	**1012184** ●	**105.00**

LIPSY® 2.0 40
CW, DOME

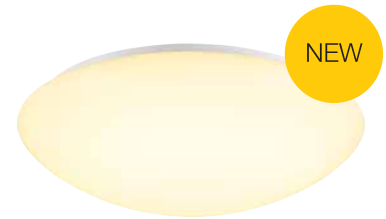



IP44 IK02 120° 50000 h L80B10 UGR 25


220-240 V ~50/60 Hz | 75 / 105 / 150 mA
Total wattage: 9 W / 18 W
Material: steel/PMMA


LED INSIDE CCT CRI 80

	3000 K	4000 K
9 W	1150 lm	1250 lm
18 W	2200 lm	2350 lm

Variant	Prod. no.	GBP
○ white/opaque	**1012186**	**88.00**

LIPSY® 2.0 40
CW, HF, DOME

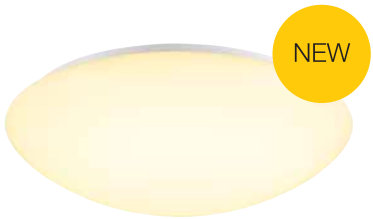



IP44 IK02 120° 50000 h L80B10 UGR 25 FR


220-240 V ~50/60 Hz | 450 mA
Total wattage: 18 W
Material: steel/PMMA


LED INSIDE CCT CRI 80

	3000 K	4000 K
Down	2000 lm	2150 lm

Variant	Prod. no.	GBP
○ white/opaque	**1012188**	**130.00**

LIPSY® 2.0 40
CW, 3H EM, DOME

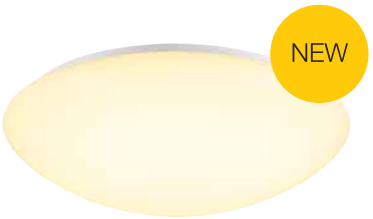



IP44 IK02 120° 50000 h L80B10 UGR 25

220-240 V ~50/60 Hz | 500 mA
Total wattage: 19.5 W
Material: steel/PMMA


LED INSIDE CCT CRI 80

	3000 K	4000 K
Down	2000 lm	2150 lm

Variant	Prod. no.	GBP
○ white/opaque	**1012190**	**214.00**

LIPSY® 2.0 30
CW, DRUM





IP44 IK02 120° 50000h L80B10 UGR 25

220-240 V ~50/60 Hz | 160 / 230 mA
Total wattage: 7.1 W / 11 W
Material: steel/PMMA


LED INSIDE CCT CRI 80

	3000 K	4000 K
7.1 W	900 lm	950 lm
11 W	1250 lm	1300 lm

Variant	Prod. no.	GBP
○ white/opaque	**1012183** ●	**68.00**

LIPSY® 2.0 30
CW, HF, DRUM





IP44 IK02 120° 50000h L80B10 UGR 25 FR

220-240 V ~50/60 Hz | 200 mA
Total wattage: 13 W
Material: steel/PMMA


LED INSIDE CCT CRI 80

	3000 K	4000 K
Down	1400 lm	1500 lm

Variant	Prod. no.	GBP
○ white/opaque	**1012185** ●	**105.00**

LIPSY® 2.0 40
CW, DRUM





IP44 IK02 120° 50000 h L80B10 UGR 25

220-240 V ~50/60 Hz | 75 / 105 / 150 mA
Total wattage: 9 W / 18 W
Material: steel/PMMA


LED INSIDE CCT CRI 80

	3000 K	4000 K
9 W	1150 lm	1250 lm
18 W	2200 lm	2350 lm

Variant	Prod. no.	GBP
○ white/opaque	1012187	88.00

LIPSY® 2.0 40
CW, HF, DRUM





IP44 IK02 120° 50000 h L80B10 UGR 25 FR

220-240 V ~50/60 Hz | 450 mA
Total wattage: 18 W
Material: steel/PMMA


LED INSIDE CCT CRI 80

	3000 K	4000 K
Down	2000 lm	2150 lm

Variant	Prod. no.	GBP
○ white/opaque	1012189	130.00

LIPSY® 2.0 40
CW, 3H EM, DRUM






IP44 IK02 120° 50000 h L80B10 UGR 25

220-240 V ~50/60 Hz | 500 mA
Total wattage: 19.5 W
Material: steel/PMMA

LED INSIDE CCT CRI 80


	3000 K	4000 K
Down	2000 lm	2150 lm

Variant	Prod. no.	GBP
○ white/opaque	1012191	214.00

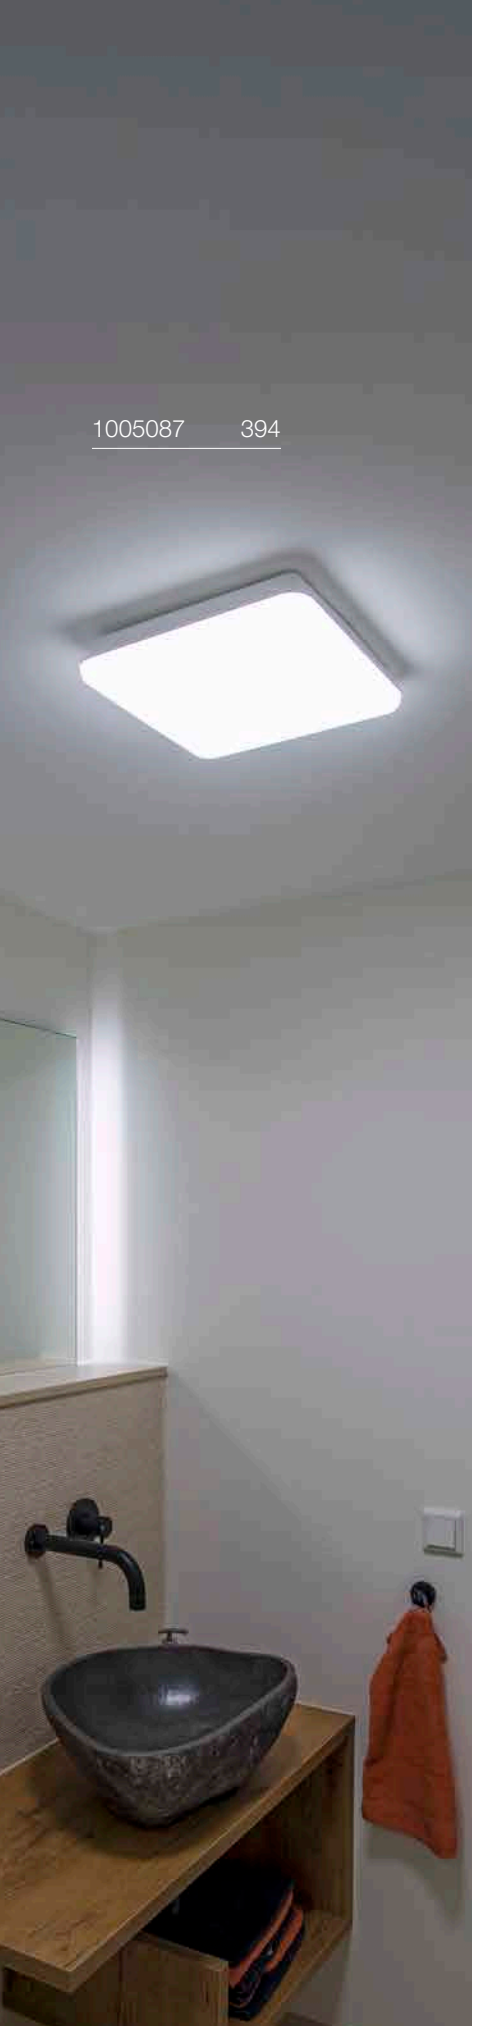

1005087 394

SIMA
CW, SQUARE, PHASE



IP44 IK02 120° 30000h L70B50 12


220-240 V ~50/60 Hz | 320 mA
Total wattage: 24 W
Material: polycarbonate (PC)

LED INSIDE CRI 90

	3000 K
	2200 lm

Variant	Prod. no.	GBP
○ white	**1005087**	**135.00**

SIMA
CW, SQUARE, SENSOR



IP44 IK02 120° 30000h L70B50 12 MR

220-240 V ~50/60 Hz | 320 mA
Total wattage: 24 W
Material: polycarbonate (PC)


LED INSIDE CRI 90

	3000 K
	2200 lm

Variant	Prod. no.	GBP
○ white	**1005088**	**156.00**

MELAN
CW, E27





IP20

220-240 V ~50/60 Hz
Material: aluminium/glass

SOCKET INSIDE 60 W

Base: 1 × E27	max. Ø: 7 cm	L: 16 cm

Variant	Prod. no.	GBP
aluminium	**155236**	**109.00**

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F

Prod. no.: **1005303** **9.00 GBP**


SMART

E27 | 9 W | 180°
806 lm | 2700 K | EEC = F

Prod. no.: **1012471** **14.00 GBP**

BATTEN 60
CW





IP20 IK02 30000 h L70B50 10

220-240 V ~50/60 Hz | 110 mA
Total wattage: 9 W
Material: polycarbonate (PC)

- Switch on light housing
- Feed-in not included


LED INSIDE CCT CRI 90

	3000 K	4000 K
1006123	940 lm	980 lm

Variant	Prod. no.	GBP
white 940 lm	**1006123**	**47.00**

Product	Prod. no.	GBP
Feed-in		
white	**1006125**	**10.00**
Mounting brackets		
white	**1006126**	**2.00**
Connector		
white	**1006127**	**6.00**
Direct connector		
white	**1006128**	**3.00**

BATTEN 120
CW



IP20 IK02 30000 h L70B50 5

220-240 V ~50/60 Hz | 220 mA
Total wattage: 18 W
Material: polycarbonate (PC)

- Switch on light housing
- Feed-in not included

LED INSIDE CCT CRI 90

	3000 K	4000 K
1006124	1900 lm	1960 lm

Variant	Prod. no.	GBP
white 1900 lm	**1006124**	**58.00**

Product	Prod. no.	GBP
Feed-in		
white	**1006125**	**10.00**
Mounting brackets		
white	**1006126**	**2.00**
Connector		
white	**1006127**	**6.00**
Direct connector		
white	**1006128**	**3.00**

SYMBOLS KEY

Recommendations
Displays accessories and recommended light bulbs for the chosen products

Mix & Match
Indicates products that can be combined

Energy efficiency class
"This light is suitable for bulbs with an energy efficiency rating of ..."

Protection classes
- Protection class I / Protective conductor
- Protection class II/ Protection by double or reinforced insulation
- Protection class III/ Protection by extra-low voltage

Dimmable with:
- **C** = Trailing-edge phase dimmer
- **L** = Leading-edge phase dimmer
- **Uni** = Universal dimmer
- **1–10 V**
- **Dali** = DALI bus system
- **Switch** = Switch/button or touch control on the light
- **Touch** = Simple, stepless operation; responds to touch

IP protection rating:
Indicates the suitability of electrical equipment for different environmental conditions.

IK impact resistance rating:
The IK impact resistance rating is a measure of the resistance of housings for electrical equipment to mechanical stress, especially impact stress.

Half-diffusion angle:
Describes the beam angle in degrees. The smaller the angle, the more concentrated the light will be.

Rotation and pivoting capacity in degrees:
- Rotation range
- Pivot range
- Gimballed

Preservation of luminous flux:
Describes the amount by which the luminous flux of an LED decreases during a specified period.

Unified Glare Rating:
The lower the UGR value, the lower the psychological glare.

Pendant cable length
in cm

Cable length:
Mains plugs, connectors and supply cables (with open cable end) in cm

Through-wiring possible

Shape of the installation opening

Specification of the installation depth

Drive-over capability of the product ensured

Weight-bearing capacity of the product up to the specified value in tonnes. Measurements based on installation in concrete.

Sea-air resistant coating

Independent converter:
Control equipment also for use outside of lights

Short-circuit protected safety control equipment

Light colour temperature in Kelvin (K)

Luminous flux in lumens (lm)

Dark Sky
Indicates that the light emits almost no light into the upper half-space (ULOR < 2 %). Reduces light pollution and ensures targeted, needs-based illumination of the usable area.

Primary/Replica
Indicates lights with integrated primary/replica function. A sensor light (primary) controls downstream lights (replica) via a switched phase, enabling simple, networked lighting control without additional bus or control systems.

Connected lighting:
Indicates smart products that use the following protocols:
- Zigbee®
- DALI
- Bluetooth

Allows the installation of electrical control equipment on materials whose flammability is not known.

CCT switch:
By means of an integrated CCT switch, the light colour can be changed from 2700 K, 3000 K, 4000 K to 6500 K during installation.

Dim-to-warm:
With dimmers, the light colour can be altered from cold white to warm white.

Indicates lights with RGB+W and RGB
(Red-Green-Blue + White and Red-Green-Blue)

Indicates lights with motion sensors
(Microwaves (MR) - Technology / Infrared / Radio)

Products with integrated LEDs

Products with light socket

KS Licht – Your lighting wholesaler in Essen

Contact, customer service and information for customers
BIG WHITE 2027

Directly linked to our product range, advice and project services:

In the KS Multi Brand Business online shop, you will find the latest products, new releases and special offers, as well as information to support you with advice, quotations and project management:

- Online stock availability check
- Catalogues, browsable catalogues and product links
- Technical data, tender specifications, light distribution curves and LDT files
- Easily find and order spare parts
- View your individual terms and conditions, delivery and payment terms
- Relevant product recommendations, variants and alternative products
- Direct contact with our sales team

Customer Information

All prices are net, plus statutory VAT. The retail prices quoted are recommended retail prices. Upon publication of this catalogue, previous price lists cease to be valid.
Illustrations, colours, shapes, designs and technical specifications are for illustrative purposes only and are not binding. Subject to changes and errors.
Goods are generally dispatched ex works, carriage forward.
For orders with a net value of less than €70.00, a minimum order surcharge of €8.00 will be applied.

Ordering & Delivery

When placing orders, please always specify the item number, colour and quantity. This reduces the need for follow-up enquiries and speeds up processing.
Express and direct deliveries are available on request.
Custom-made items, components assembled to the customer's specifications and lamps are excluded from exchange.
Our General Terms and Conditions apply and are available at www.ks-germany.com/de/agb.

Kontakt

KS Licht- und Elektrotechnik GmbH
Manderscheidtstraße 8 c
45141 Essen
Germany

Verkauf & Service
Tel.: +49 (0)201-89924-0
verkauf@ks-germany.com

Online
ks-light.co.uk
www.ks-germany.com

Pflichtangaben

KS Licht- und Elektrotechnik GmbH · Sitz der Gesellschaft: Essen · Geschäftsführer: Kai Becker
Registergericht: Amtsgericht Essen · Handelsregister: HRB 12736 · Steuer-Nr.: 111/5708/2689 ·
USt-IdNr.: DE190673411

KS Licht- und Elektrotechnik GmbH
Manderscheidtstraße 8 c
45141 Essen
Germany

Tel.: +49 (0)201-89924-0

B2B-Shop: **ks-light.co.uk**
Website: www.ks-germany.com
E-Mail: verkauf@ks-germany.com

Opening hours
Monday – Thursday 08:00 – 16:30
Friday 08:00 – 15:00