BIG WHITE®
2027

SLV LIGHTING CATALOGUE



LIGHT BULBS

LIGHT BULBS



LED QT14 | 896



LED QT–DE12 | 896



LED G45 GOLD | 896



LED C35 GOLD | 896



LED C35 | 896– 897

LED TCR–TSE | 897



LED QR51 | 897



LED A60 | 897, 900, 903



LED T32 | 897



LED QPAR51 | 898



LED PAR11 | 899



LED QPAR111 | 899




LED GLOBE 150 | 900–901



LED GLOBE 125 | 900–901, 903



LED GLOBE 200 | 901



LED GLOBE 300 | 901



LED T32 | 902



LED T38 | 902



LED T45 | 902



LED ST64 | 902–903



LED ST58 | 903



SLVconnect® LED PAR16 SMART | 904



SLVconnect® LED A60 SMART | 904

LED QT14
G9



220-240 V ~50/60 Hz
Material: ceramic
Ø: 1.8 cm | L: 5.4 cm

Luminous flux	450 lm
Lamp current	0.03 A
Colour rendering	90
Output	3.6 W

Variant	Prod. no.	GBP
○ transparent 400 lm | 3000 K	**1005286**	**8.00**
○ transparent 450 lm | 2700 K	**1007455**	**8.00**

LED QT-DE12
R7S, 78 MM



220-240 V ~50/60 Hz
Material: polycarbonate (PC)
Ø: 2.9 cm | L: 2.9 cm

Luminous flux	1050 lm
Lamp current	0.04 A
Colour rendering	90
Output	9 W

Variant	Prod. no.	GBP
○ transparent 3000 K	**1005287**	**21.00**

LED QT-DE12
R7S, 118 MM



220-240 V ~50/60 Hz
Material: polycarbonate (PC)
Ø: 2.9 cm | L: 11.8 cm

Luminous flux	2000 lm
Lamp current	0.07 A
Colour rendering	90
Output	15 W

Variant	Prod. no.	GBP
○ transparent 3000 K	**1005288**	**25.00**

LED G45
E14, GOLD CURLY FILAMENT



220-240 V ~50/60 Hz
Material: glass
Ø: 4.5 cm | L: 7.5 cm

Luminous flux	75 lm
Lamp current	0.01 A
Colour rendering	80
Output	2 W

Variant	Prod. no.	GBP
◐ gold/transparent 70 lm | 1800 K	**1008649**	**5.00**
◐ gold/transparent 75 lm | 2200 K	**1008650**	**5.00**

LED C35
E14, GOLD CURLY FILAMENT



220-240 V ~50/60 Hz
Material: glass
Ø: 3.5 cm | L: 9.8 cm

Luminous flux	80 lm
Lamp current	0.01 A
Colour rendering	80
Output	2 W

Variant	Prod. no.	GBP
◐ gold/transparent 1800 K	**1008647**	**5.00**
◐ gold/transparent 2200 K	**1008648**	**5.00**

LED C35
E14



220-240 V ~50/60 Hz
Material: glass
Ø: 3.5 cm | L: 9.8 cm

Luminous flux	380 lm
Lamp current	0.03 A
Colour rendering	90
Output	4.2 W

Variant	Prod. no.	GBP
○ transparent 2700 K	**1005284**	**6.00**

LED C35
E14



220-240 V ~50/60 Hz
Material: glass
Ø: 3.5 cm | L: 9.8 cm

Luminous flux	350 lm
Lamp current	0.03 A
Colour rendering	90
Output	4.2 W

Variant	Prod. no.	GBP
○ frosted 2700 K	**1005285**	**8.00**

LED TCR-TSE
GX53

230 V 50/60 Hz
Material: polycarbonate (PC)
Ø: 7.5 cm | L: 2.4 cm

Luminous flux	490 lm | 520 lm
Lamp current	0.03 A
Colour rendering	90
Output	6.1 W

Variant	Prod. no.	GBP
○ white 520 lm | 4000 K	**1005269**	**10.00**
○ white 490 lm | 3000 K	**1005271**	**10.00**
○ white 490 lm | 2700 K	**1005272**	**10.00**

LED QR51
GU5.3



12 V
Material: glass
Ø: 5 cm | L: 4.5 cm

Manufacturer	Philips
Luminous flux	460 lm
Lamp current	0.63 A
Colour rendering	90
Output	5.8 W

Variant	Prod. no.	GBP
○ transparent 450 lm | 2700 K	**1001574**	**30.00**
○ transparent 460 lm | 3000 K	**1001575**	**30.00**

LED A60
GU10



220-240 V ~50/60 Hz
Material: glass
Ø: 6 cm | L: 11 cm

Manufacturer	Segula
Luminous flux	400 lm
Lamp current	0.03 A
Colour rendering	90
Output	5 W

Variant	Prod. no.	GBP
○ transparent 2200 K	**1008154**	**38.00**

LED A60
GU10



220-240 V ~50/60 Hz
Material: glass
Ø: 6 cm | L: 11 cm

Manufacturer	Segula
Luminous flux	650 lm
Lamp current	0.04 A
Colour rendering	90
Output	6.5 W

Variant	Prod. no.	GBP
○ transparent 2700 K	**1008375**	**38.00**

LED T32
GU10



220-240 V ~50/60 Hz
Material: glass
Ø: 3.2 cm | L: 10 cm

Manufacturer	Segula
Luminous flux	270 lm
Lamp current	0.02 A
Colour rendering	90
Output	3.2 W

Variant	Prod. no.	GBP
○ transparent 2700 K	**1006321**	**42.00**

LED QPAR51
GU10



220-240 V ~50/60 Hz
Material: glass
Ø: 5 cm | L: 5 cm

Luminous flux	360 lm
Lamp current	0.03 A
Colour rendering	90
Output	6 W

Variant	Prod. no.	GBP
○ silver 2200 K	**1005273**	**9.00**

LED QPAR51
GU10



220-240 V ~50/60 Hz
Material:

Luminous flux	490 lm
Lamp current	0.03 A
Colour rendering	90
Output	6 W

Variant	Prod. no.	GBP
● black 450 lm | 2700 K	**1005077**	**7.00**
● black 470 lm | 3000 K	**1005080**	**7.00**
● black 490 lm | 4000 K	**1005083**	**7.00**

LED QPAR51
GU10



220-240 V ~50/60 Hz
Material: plastic PC

Luminous flux	490 lm
Lamp current	0.03 A
Colour rendering	90
Output	6 W

Variant	Prod. no.	GBP
○ white 450 lm | 2700 K	**1005076**	**7.00**
○ white 470 lm | 3000 K	**1005079**	**7.00**
○ white 490 lm | 4000 K	**1005082**	**7.00**

LED QPAR51
GU10



220-240 V ~50/60 Hz
Material: plastic PC

Luminous flux	490 lm
Lamp current	0.03 A
Colour rendering	90
Output	6 W

Variant	Prod. no.	GBP
● grey 450 lm | 2700 K	**1005075**	**7.00**
● grey 470 lm | 3000 K	**1005078**	**7.00**
● grey 490 lm | 4000 K	**1005081**	**7.00**

LED QPAR51
GU10



220-240 V ~50/60 Hz
Material: glass
Ø: 5 cm | L: 5.4 cm

Luminous flux	230 lm
Lamp current	0.03 A
Colour rendering	80
Output	2.4 W

Variant	Prod. no.	GBP
○ transparent 2700 K	**1007230**	**5.00**
○ transparent 3000 K	**1007231**	**5.00**

LED PAR11
GU10

NEW



C,L · IP20 · 36° · 30000h L70B50

220-240 V ~50/60 Hz
Material: ceramic
Ø: 3.5 cm

Luminous flux	430 lm
Lamp current	0.03 A
Colour rendering	90
Output	4.9 W

Variant	Prod. no.	GBP
white 390 lm | 2700 K	1011670	10.00
white 430 lm | 3000 K	1011671	10.00

LED QPAR111
GU10



C,L · IP20 · 55° · 40000h L70B50

220-240 V ~50/60 Hz
Material: aluminium
Ø: 11 cm | L: 7 cm

Luminous flux	750 lm
Lamp current	0.05 A
Colour rendering	90
Output	12 W

Variant	Prod. no.	GBP
aluminium 670 lm | 2700 K	1005297	73.00
aluminium 680 lm | 3000 K	1005298	73.00
aluminium 750 lm | 4000 K	1005299	73.00

LED QPAR 111
GU10



C · IP20 · 10° · 25000h L70B50

220-240 V ~50/60 Hz
Material: aluminium
Ø: 11.1 cm | L: 7 cm

Luminous flux	1000 lm
Lamp current	0.06 A
Colour rendering	90
Output	12.5 W

Variant	Prod. no.	GBP
silver 900 lm | 2700 K | 10°	1005275	48.00
silver 650 lm | 3000 K | 12°	1005278	48.00
silver 1000 lm | 4000 K | 10°	1005281	48.00

LED QPAR 111
GU10



C · IP20 · 30° · 25000h L70B50

220-240 V ~50/60 Hz
Material: aluminium
Ø: 11.1 cm | L: 7 cm

Luminous flux	1000 lm
Lamp current	0.06 A
Colour rendering	90
Output	12.5 W

Variant	Prod. no.	GBP
silver 950 lm | 2700 K	1005276	43.00
silver 950 lm | 3000 K	1005279	43.00
silver 1000 lm | 4000 K	1005282	43.00

LED QPAR 111
GU10



C,L · IP20 · 60° · 25000h L70B50

Material: aluminium
Ø: 11.1 cm | L: 7 cm

Luminous flux	1100 lm
Lamp current	0.06 A
Colour rendering	90
Output	12.5 W

Variant	Prod. no.	GBP
silver 1000 lm | 2700 K	1005277	43.00
silver 1000 lm | 3000 K	1005280	43.00
silver 1100 lm | 4000 K	1005283	43.00

LED QPAR111
GU10



C,L · IP20 · 38° · 25000h L70B50

220-240 V ~50/60 Hz
Material: glass
Ø: 11.1 cm | L: 6.1 cm

Luminous flux	680 lm
Lamp current	0.05 A
Colour rendering	90
Output	8 W

Variant	Prod. no.	GBP
transparent 2700 K	1005274	26.00

LED A60
E27



220-240 V ~50/60 Hz
Material: plastic
Ø: 6 cm | L: 12 cm

Luminous flux	1300 lm
Lamp current	0.06 A
Colour rendering	90
Output	13.2 W

Variant	Prod. no.	GBP
○ white 2700 K	**1005302**	**11.00**

LED A60
E27, HIGH EFFICIENCY



220-240 V ~50/60 Hz
Material: glass
Ø: 6 cm | L: 10.8 cm

Luminous flux	830/860 lmn
Lamp current	0.04 A
Colour rendering	80
Output	4 W

Variant	Prod. no.	GBP
○ transparent 830 lm | 2700 K	**1008641**	**7.00**
○ transparent 860 lm | 3000 K	**1008642**	**7.00**

LED A60
E27



220-240 V ~50/60 Hz
Material: glass
Ø: 6 cm | L: 10.8 cm

Luminous flux	810 lm
Lamp current	0.05 A
Colour rendering	80
Output	8 W

Variant	Prod. no.	GBP
○ transparent 2700 K	**1008643**	**3.00**
○ transparent 3000 K	**1008644**	**3.00**

LED A60
E27




220-240 V ~50/60 Hz
Material: glass
Ø: 6 cm | L: 10.5 cm

Luminous flux	800 lm
Lamp current	0.04 A
Colour rendering	90
Output	7.5 W

Variant	Prod. no.	GBP
○ transparent 2700 K	**1005303**	**9.00**

LED GLOBE 150
E27, TWISTED SMOKEY GREY

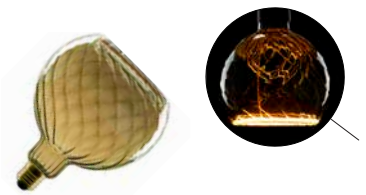


220-240 V ~50/60 Hz
Material: glass
Ø: 15 cm | L: 18.5 cm

Manufacturer	Segula
Luminous flux	230 lm
Lamp current	0.04 A
Colour rendering	85
Output	6 W

Variant	Prod. no.	GBP
● smoky grey 1900 K	**1008151**	**72.00**

LED GLOBE 125
E27, SOFT CURVE SMOKEY

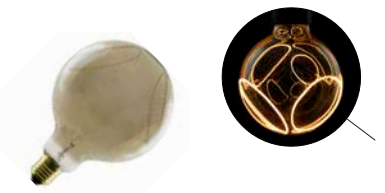


220-240 V ~50/60 Hz
Material: glass
Ø: 12.5 cm | L: 18 cm

Manufacturer	Segula
Luminous flux	400 lm
Lamp current	0.04 A
Colour rendering	90
Output	8 W

Variant	Prod. no.	GBP
● smoky grey 1900 K	**1008159**	**77.00**

LED GLOBE 125
E27, SLANTING TOP SMOKEY

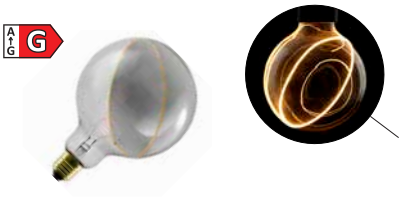


220-240 V ~50/60 Hz
Material: glass
Ø: 12.5 cm | L: 18 cm

Manufacturer	Segula
Luminous flux	350 lm
Lamp current	0.04 A
Colour rendering	90
Output	5 W

Variant	Prod. no.	GBP
smoky grey 2200 K	**1008160**	**68.00**

LED GLOBE 125
E27, CRESCENT SLANTING SMOKEY

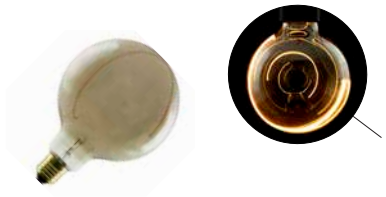

220-240 V ~50/60 Hz
Material: glass
Ø: 12.5 cm | L: 18 cm

Manufacturer	Segula
Luminous flux	310 lm
Lamp current	0.03 A
Colour rendering	90
Output	6 W

Variant	Prod. no.	GBP
smoky grey 1900 K	**1008161**	**59.00**

LED GLOBE 125
E27, BLACK SMOKEY



220-240 V ~50/60 Hz
Material: glass
Ø: 12.5 cm | L: 16.5 cm

Manufacturer	Segula
Luminous flux	220 lm
Lamp current	0.04 A
Colour rendering	85
Output	6 W

Variant	Prod. no.	GBP
smoky grey 1900 K	**1008155**	**59.00**

LED GLOBE 150
E27, BLACK SMOKEY




220-240 V ~50/60 Hz
Material: glass
Ø: 15 cm | L: 18.5 cm

Manufacturer	Segula
Luminous flux	260 lm
Lamp current	0.04 A
Colour rendering	85
Output	6 W

Variant	Prod. no.	GBP
smoky grey 1900 K	**1008163**	**72.00**

LED GLOBE 200
E27, BLACK SMOKEY

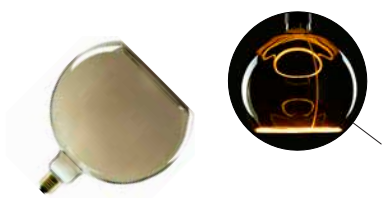


220-240 V ~50/60 Hz
Material: glass
Ø: 20 cm | L: 23 cm

Manufacturer	Segula
Luminous flux	300 lm
Lamp current	0.04 A
Colour rendering	85
Output	6 W

Variant	Prod. no.	GBP
smoky grey 1900 K	**1008164**	**89.00**

LED GLOBE 300
E27, BLACK SMOKEY

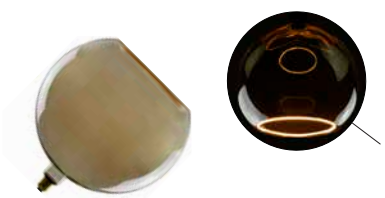

220-240 V ~50/60 Hz
Material: glass
Ø: 30 cm | L: 32 cm

Manufacturer	Segula
Luminous flux	350 lm
Lamp current	0.05 A
Colour rendering	85
Output	8 W

Variant	Prod. no.	GBP
smoky grey 1900 K	**1008165**	**214.00**

LED T32
E27, SOFT SPIRAL



220-240 V ~50/60 Hz
Material: glass
Ø: 3.2 cm | L: 19 cm

Manufacturer	Segula
Luminous flux	570 lm
Lamp current	0.04 A
Colour rendering	90
Output	6 W

Variant	Prod. no.	GBP
○ transparent 2200 K	**1008152**	**55.00**

LED T32
E27, SOFT TUBE



220-240 V ~50/60 Hz
Material: glass
Ø: 3.2 cm | L: 30 cm

Manufacturer	Segula
Luminous flux	400 lm
Lamp current	0.05 A
Colour rendering	90
Output	8 W

Variant	Prod. no.	GBP
○ transparent 1900 K	**1008374**	**42.00**

LED T38
E27



220-240 V ~50/60 Hz
Material: plastic
Ø: 3.8 cm | L: 11.6 cm

Luminous flux	880 lm
Lamp current	0.04 A
Colour rendering	90
Output	8 W

Variant	Prod. no.	GBP
○ white 3000 K	**1005289**	**10.00**

LED T45
E27



220-240 V ~50/60 Hz
Material: plastic
Ø: 4.5 cm | L: 14 cm

Luminous flux	1520 lm
Lamp current	0.06 A
Colour rendering	90
Output	13.5 W

Variant	Prod. no.	GBP
○ white 3000 K	**1005307**	**11.00**

LED T32
E27, SLIM TUBE



220-240 V ~50/60 Hz
Material: glass
Ø: 3.2 cm L: 17.5 cm

Manufacturer	Segula
Luminous flux	1250 lm
Lamp current	0.06 A
Colour rendering	90
Output	11 W

Variant	Prod. no.	GBP
○ transparent 2700 K	**1008162**	**72.00**

LED ST64
E27, GOLD



220-240 V ~50/60 Hz
Material: glass
Ø: 6.4 cm | L: 14.5 cm

Luminous flux	700 lm
Lamp current	0.04 A
Colour rendering	90
Output	7.5 W

Variant	Prod. no.	GBP
● gold 2500 K	**1005265**	**23.00**

LED ST64
E27, GOLD CURLY FILAMENT



220-240 V ~50/60 Hz
Material: glass
Ø: 6.4 cm | L: 14.2 cm

Luminous flux	300 lm
Lamp current	0.03 A
Colour rendering	80
Output	4 W

Variant	Prod. no.	GBP
gold/transparent 250 lm | 1800 K	**1008645**	**6.00**
gold/transparent 3000 lm | 2000 K	**1008646**	**6.00**

LED ST58
E27



220-240 V ~50/60 Hz
Material: glass
Ø: 5.8 cm | L: 14.2 cm

Luminous flux	800 lm
Lamp current	0.04 A
Colour rendering	90
Output	7.5 W

Variant	Prod. no.	GBP
transparent 2700 K	**1005268**	**11.00**

LED A60
E27, MIRRORHEAD CHROM



220-240 V ~50/60 Hz
Material: glass
Ø: 6 cm | L: 10.5 cm

Luminous flux	720 lm
Lamp current	0.04 A
Colour rendering	90
Output	7.5 W

Variant	Prod. no.	GBP
chrome 2700 K	**1005305**	**17.00**

LED GLOBE 125
E27



220-240 V ~50/60 Hz
Material: glass
Ø: 12.5 cm | L: 17.8 cm

Luminous flux	800 lm
Lamp current	0.04 A
Colour rendering	90
Output	7.5 W

Variant	Prod. no.	GBP
transparent 2700 K	**1005310**	**16.00**

LED GLOBE 125
E27, HALF MOON



220-240 V ~50/60 Hz
Material: glass
Ø: 12.5 cm | L: 18 cm

Manufacturer	Segula
Luminous flux	650 lm
Lamp current	0.04 A
Colour rendering	90
Output	6.5 W

Variant	Prod. no.	GBP
frosted 2700 K	**1008157**	**42.00**

SLVconnect®
LED PAR16 SMART
GU10, ZIGBEE 3.0



220-240 V ~50/60 Hz
Material: glass
Ø: 5 cm

Manufacturer	Ledvance
Luminous flux	350 lm
Lamp current	0.04 A
Colour rendering	80
Output	4.7 W

Variant	Prod. no.	GBP
○ transparent	**1012468**	**18.00**

SLVconnect®
LED PAR16 SMART
GU10, TUNABLE WHITE, ZIGBEE 3.0



220-240 V ~50/60 Hz
Material: glass
Ø: 5 cm

Manufacturer	Ledvance
Luminous flux	350 lm
Lamp current	0.04 A
Colour rendering	80
Output	4.7 W

Variant	Prod. no.	GBP
○ transparent	**1012469**	**23.00**

SLVconnect®
LED PAR16 SMART
GU10, RGBW, ZIGBEE 3.0



220-240 V ~50/60 Hz
Material: glass
Ø: 5 cm

Manufacturer	Ledvance
Luminous flux	300 lm
Lamp current	0.04 A
Colour rendering	80
Output	4.9 W

Variant	Prod. no.	GBP
○ transparent	**1012470**	**29.00**

SLVconnect®
LED A60 SMART
E27, ZIGBEE 3.0



220-240 V ~50/60 Hz
Material: plastic PC
Ø: 6 cm

Manufacturer	Ledvance
Luminous flux	806 lm
Lamp current	0.06 A
Colour rendering	80
Output	9 W

Variant	Prod. no.	GBP
○ white	**1012471**	**14.00**

SLVconnect®
LED A60 SMART
E27, RGBW, ZIGBEE 3.0



220-240 V ~50/60 Hz
Material: plastic PC
Ø: 6 cm

Manufacturer	Ledvance
Luminous flux	806 lm
Lamp current	0.06 A
Colour rendering	80
Output	9 W

Variant	Prod. no.	GBP
○ white	**1012472**	**25.00**


1008164 901
1008161 901

SYMBOLS KEY

Recommendations
Displays accessories and recommended light bulbs for the chosen products

Mix & Match
Indicates products that can be combined

Energy efficiency class
"This light is suitable for bulbs with an energy efficiency rating of ..."

Protection classes
- Protection class I / Protective conductor
- Protection class II/ Protection by double or reinforced insulation
- Protection class III/ Protection by extra-low voltage

Dimmable with:
- **C** = Trailing-edge phase dimmer
- **L** = Leading-edge phase dimmer
- **Uni** = Universal dimmer
- **1–10 V**
- **Dali** = DALI bus system
- **Switch** = Switch/button or touch control on the light
- **Touch** = Simple, stepless operation; responds to touch

IP protection rating:
Indicates the suitability of electrical equipment for different environmental conditions.

IK impact resistance rating:
The IK impact resistance rating is a measure of the resistance of housings for electrical equipment to mechanical stress, especially impact stress.

Half-diffusion angle:
Describes the beam angle in degrees. The smaller the angle, the more concentrated the light will be.

Rotation and pivoting capacity in degrees:
- Rotation range
- Pivot range
- Gimballed

Preservation of luminous flux:
Describes the amount by which the luminous flux of an LED decreases during a specified period.

Unified Glare Rating:
The lower the UGR value, the lower the psychological glare.

Pendant cable length
in cm

Cable length:
Mains plugs, connectors and supply cables (with open cable end) in cm

Through-wiring possible

Shape of the installation opening

Specification of the installation depth

Drive-over capability of the product ensured

Weight-bearing capacity of the product up to the specified value in tonnes. Measurements based on installation in concrete.

Sea-air resistant coating

Independent converter:
Control equipment also for use outside of lights

Short-circuit protected safety control equipment

Light colour temperature in Kelvin (K)

Luminous flux in lumens (lm)

Dark Sky
Indicates that the light emits almost no light into the upper half-space (ULOR < 2 %). Reduces light pollution and ensures targeted, needs-based illumination of the usable area.

Primary/Replica
Indicates lights with integrated primary/replica function. A sensor light (primary) controls downstream lights (replica) via a switched phase, enabling simple, networked lighting control without additional bus or control systems.

Connected lighting:
Indicates smart products that use the following protocols:
- Zigbee®
- DALI
- Bluetooth

Allows the installation of electrical control equipment on materials whose flammability is not known.

CCT switch:
By means of an integrated CCT switch, the light colour can be changed from 2700 K, 3000 K, 4000 K to 6500 K during installation.

Dim-to-warm:
With dimmers, the light colour can be altered from cold white to warm white.

Indicates lights with RGB+W and RGB
(Red-Green-Blue + White and Red-Green-Blue)

Indicates lights with motion sensors
(Microwaves (MR) - Technology / Infrared / Radio)

Products with integrated LEDs

Products with light socket

KS Licht – Your lighting wholesaler in Essen

Contact, customer service and information for customers
BIG WHITE 2027

Directly linked to our product range, advice and project services:

In the KS Multi Brand Business online shop, you will find the latest products, new releases and special offers, as well as information to support you with advice, quotations and project management:

- Online stock availability check
- Catalogues, browsable catalogues and product links
- Technical data, tender specifications, light distribution curves and LDT files
- Easily find and order spare parts
- View your individual terms and conditions, delivery and payment terms
- Relevant product recommendations, variants and alternative products
- Direct contact with our sales team

Customer Information

All prices are net, plus statutory VAT. The retail prices quoted are recommended retail prices. Upon publication of this catalogue, previous price lists cease to be valid.
Illustrations, colours, shapes, designs and technical specifications are for illustrative purposes only and are not binding. Subject to changes and errors.
Goods are generally dispatched ex works, carriage forward.
For orders with a net value of less than €70.00, a minimum order surcharge of €8.00 will be applied.

Ordering & Delivery

When placing orders, please always specify the item number, colour and quantity. This reduces the need for follow-up enquiries and speeds up processing.
Express and direct deliveries are available on request.
Custom-made items, components assembled to the customer's specifications and lamps are excluded from exchange.
Our General Terms and Conditions apply and are available at www.ks-germany.com/de/agb.

Kontakt

KS Licht- und Elektrotechnik GmbH
Manderscheidtstraße 8 c
45141 Essen
Germany

Verkauf & Service
Tel.: +49 (0)201-89924-0
verkauf@ks-germany.com

Online
ks-light.co.uk
www.ks-germany.com

Pflichtangaben

KS Licht- und Elektrotechnik GmbH · Sitz der Gesellschaft: Essen · Geschäftsführer: Kai Becker
Registergericht: Amtsgericht Essen · Handelsregister: HRB 12736 · Steuer-Nr.: 111/5708/2689 ·
USt-IdNr.: DE190673411

KS Licht- und Elektrotechnik GmbH
Manderscheidtstraße 8 c
45141 Essen
Germany

Tel.: +49 (0)201-89924-0

B2B-Shop: **ks-light.co.uk**
Website: www.ks-germany.com
E-Mail: verkauf@ks-germany.com

Opening hours
Monday – Thursday 08:00 – 16:30
Friday 08:00 – 15:00