BIG WHITE®
2027

SLV LIGHTING CATALOGUE



OUTDOOR CEILING LIGHTS

OUTDOOR | CEILING LIGHTS



SOCKET

PHOTONI CYL | 754




SOCKET

PHOTONI | 754



SOCKET

SEJERO | 755



LED

CUBE | 757



LED

ESKINA FRAME | 757



LED

ENOLA® OCULUS | 758



LED

ENOLA® ROUND | 759



LED

ENOLA® SQUARE | 760–761



LED

SOCKET

BIG THEO | 761





LED

OVALISK | 763



SOCKET

MOLAT | 763



SOCKET

SITRA | 765




SOCKET

ROX | 765



PHOTONI CYL
CL, E27





IP65 IK08

220-240 V ~50/60 Hz
Material: Aluminium

• Sea-air resistant

SOCKET INSIDE 13 W

Base: 1xE27 | max. Ø: 6 cm | L: 11.6 cm

Variant	Prod. no.	GBP
● black	**1008199**	**85.00**
● Rust	**1008200**	**85.00**


E27 | 4 W | 280°
830 lm | 2700 K | EEC = A

Prod. no.: 1008641 7.00 GBP

PHOTONI
CL, E27

GERMAN DESIGN AWARD WINNER 2024





IP65 IK08

220-240 V ~50/60 Hz
Material: Aluminium

• Sea-air resistant

SOCKET INSIDE 13 W

Base: 1xE27 | max. Ø: 6 cm | L: 11.6 cm

Variant	Prod. no.	GBP
● black	**1007586**	**85.00**
● Rust	**1007582**	**85.00**

E27 | 8 W | 240°
880 lm | 3000 K | EEC = E

Prod. no.: 1005289 10.00 GBP

SEJERO
PD, E27



IP65 IK02 49,1 cm

220-240 V ~50/60 Hz
Material: Aluminium/Glass

SOCKET INSIDE 15 W

Base: 1xE27 | max. Ø: 6.5 cm | L: 12 cm


Variant	Prod. no.	GBP
Anthracite	1011025	176.00

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F

C

Prod. no.: 1005303 9.00 GBP

SEJERO
PD, E27

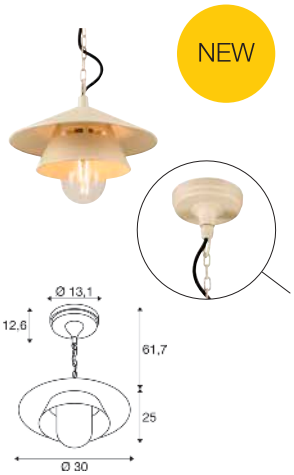

IP65 IK02 49,1 cm

220-240 V ~50/60 Hz
Material: Aluminium/Glass

SOCKET INSIDE 15 W

Base: 1xE27 | max. Ø: 6.5 cm | L: 12 cm

Variant	Prod. no.	GBP
beige	1011026	176.00

E27 | 8 W | 320°
800 lm | 2700 K | EEC = F


C

Prod. no.: 1005303 9.00 GBP


1007461 757

CUBE
CL, PHASE





220-240 V ~50/60 Hz | 350 mA
Total wattage: 15 W
Material: Aluminium

- The light colour must be set prior to installation


2700 K	3000 K
1000 lm	1200 lm

Variant	Prod. no.	GBP
● Anthracite	**1007461**	**118.00**

ESKINA FRAME
CL, SINGLE, PHASE

GERMAN DESIGN AWARD WINNER 2022






220-240 V ~50/60 Hz | 350 mA
Total wattage: 15 W
Material: Aluminium/Glass

- The light colour must be set prior to installation
- Light head is pivoting


	3000 K	4000 K
Direct	1100 lm	1200 lm

Variant	Prod. no.	GBP
● Anthracite	**1006316**	**159.00**

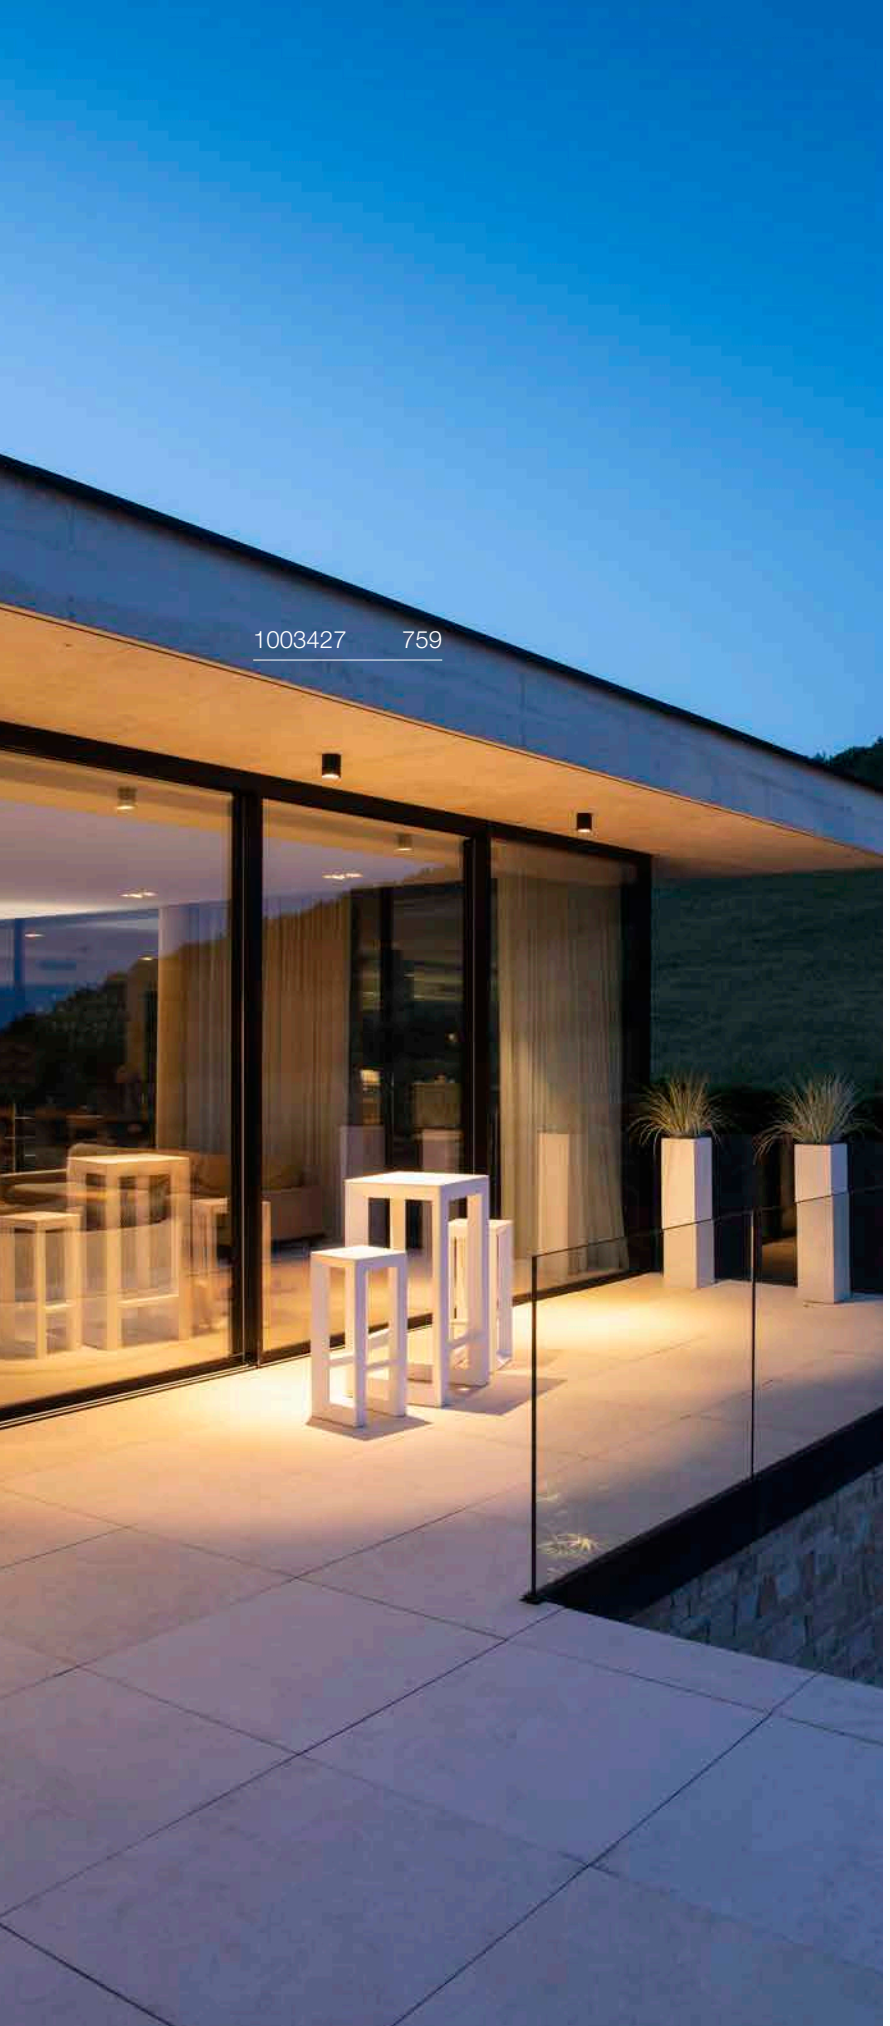

ENOLA® OCULUS
CL







220-240 V ~50/60 Hz | 500 mA
Total wattage: 10.3 W
Material: Aluminium/Glass

- The light colour must be set prior to installation



3000 K	4000 K
1050 lm	1130 lm


Variant	Prod. no.	GBP
● Anthracite	**1006327**	**205.00**

⊕

Product	Prod. no.	GBP
Spacer		
● Anthracite	**1003479**	**9.00**

ENOLA® ROUND S
CL





IP65 IK06 38° 50000h L80B20 10

220-240 V ~50/60 Hz | 500 mA
Total wattage: 9 W
Material: Aluminium/Glass

- The light colour must be set prior to installation

LED INSIDE CCT CRI 90

3000 K	4000 K
610 lm	720 lm


Variant	Prod. no.	GBP
Anthracite	**1003426**	**151.00**

⊕

Product	Prod. no.	GBP
Spacer		
Anthracite	**1003479**	**9.00**
Lens 19°		
black	**1005205**	**37.00**
Asymmetrical lens		
black/chrome	**1005206**	**37.00**
Reflector 60°		
chrome	**1005207**	**22.00**

ENOLA® ROUND M
CL





IP65 IK06 38° 50000h L80B20 10

220-240 V ~50/60 Hz | 500 mA
Total wattage: 10.5 W
Material: Aluminium/Glass

- The light colour must be set prior to installation
- Conveniently adjustable light distribution using interchangeable 19°, 60° and asymmetric optics as accessories

LED INSIDE CCT CRI 90

3000 K	4000 K
1010 lm	1050 lm


Variant	Prod. no.	GBP
Anthracite	**1003427**	**189.00**

⊕

Product	Prod. no.	GBP
Spacer		
Anthracite	**1003479**	**9.00**
Lens 19°		
black	**1005205**	**37.00**
Asymmetrical lens		
black/chrome	**1005206**	**37.00**
Reflector 60°		
chrome	**1005207**	**22.00**

ENOLA® ROUND L
CL





IP65 IK06 38° 50000h L80B50 10

220-240 V ~50/60 Hz | 900 mA
Total wattage: 36 W
Material: Aluminium/Glass

- The light colour must be set prior to installation
- Conveniently adjustable light distribution using 60° interchangeable optics as an accessory


LED INSIDE CCT CRI 90

3000 K	4000 K
3380 lm	3770 lm

Variant	Prod. no.	GBP
Anthracite	**1003442**	**268.00**


⊕

Product	Prod. no.	GBP
Spacer		
Anthracite	**1003479**	**9.00**
Reflector 60°		
chrome	**1005263**	**20.00**

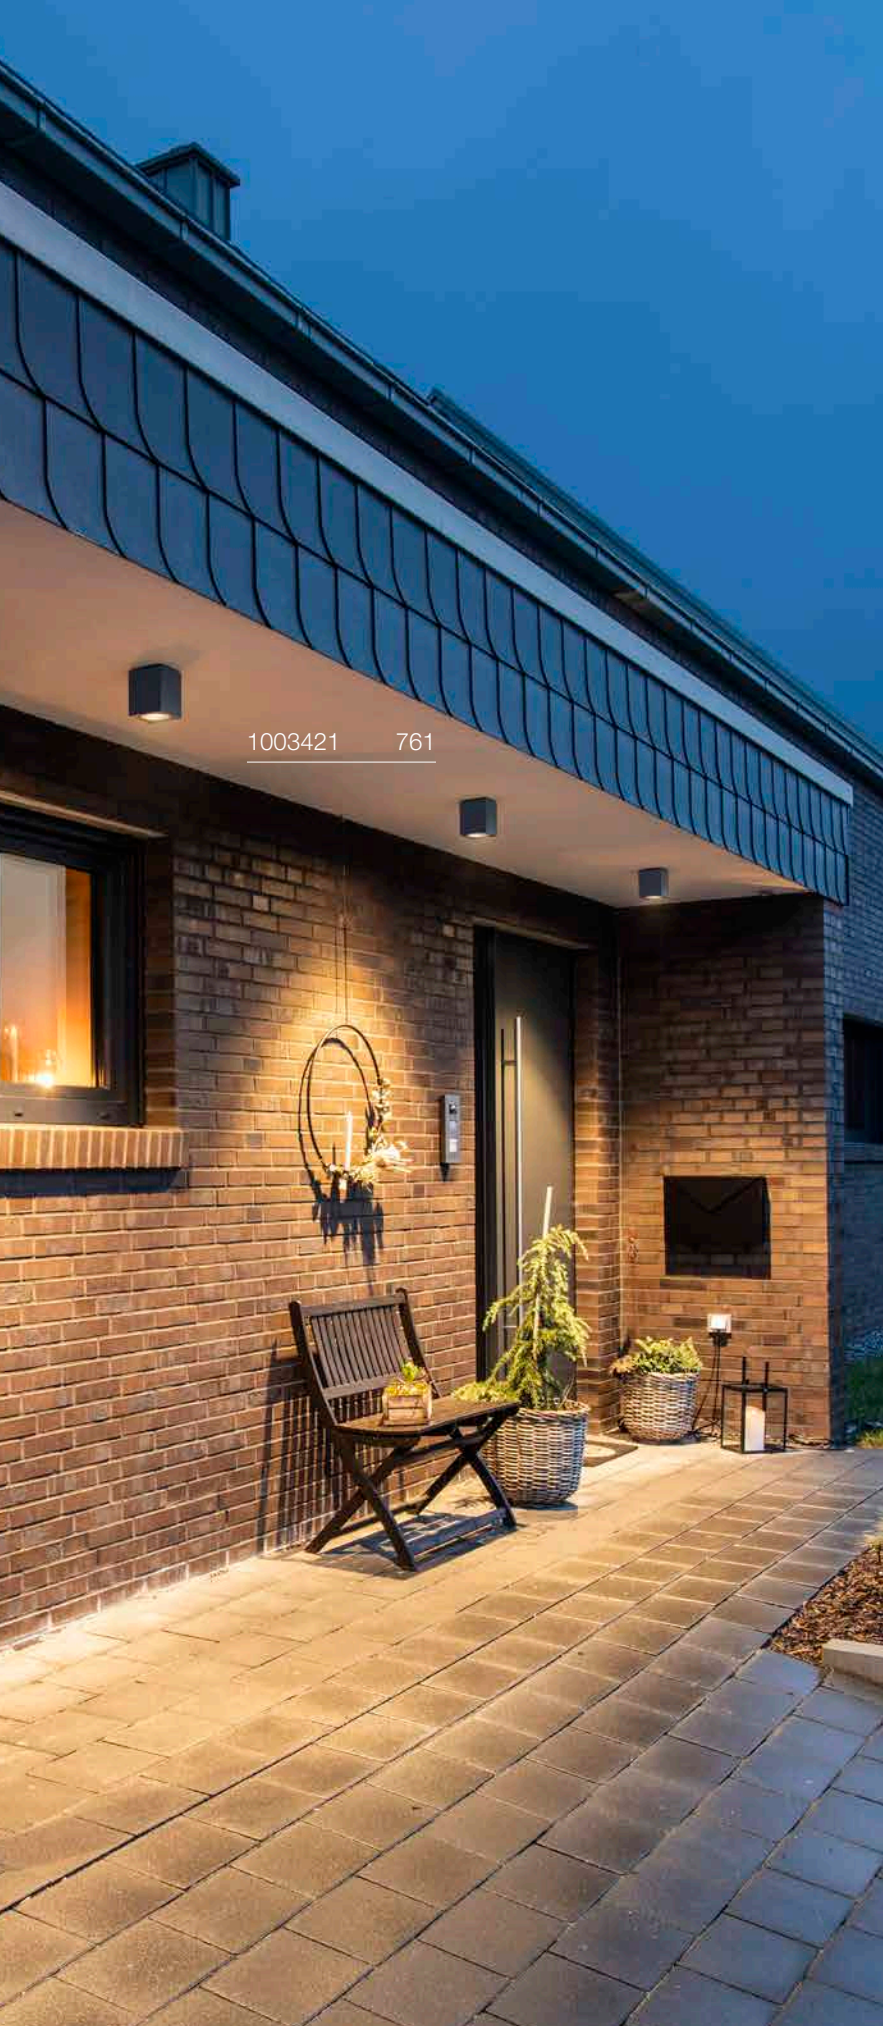

ENOLA® SQUARE S
CL







220-240 V ~50/60 Hz | 500 mA
Total wattage: 9 W
Material: Aluminium/Glass

- The light colour must be set prior to installation




3000 K	4000 K
610 lm	720 lm

Variant	Prod. no.	GBP
● Anthracite	**1003420**	**151.00**

Product	Prod. no.	GBP
Spacer		
● Anthracite	**1003479**	**9.00**
Lens 19°		
● black	**1005205**	**37.00**
Asymmetrical lens		
◐ black/chrome	**1005206**	**37.00**
Reflector 60°		
◑ chrome	**1005207**	**22.00**

ENOLA® SQUARE M
CL





IP65 IK06 38° 50000 h L80B20 10

220-240 V ~50/60 Hz | 500 mA
Total wattage: 10.5 W
Material: Aluminium/Glass

- The light colour must be set prior to installation
- Conveniently adjustable light distribution using interchangeable 19°, 60° and asymmetric optics as accessories

LED INSIDE CCT CRI 90


3000 K	4000 K
1010 lm	1050 lm

Variant	Prod. no.	GBP
Anthracite	**1003421**	**189.00**

Product	Prod. no.	GBP
Spacer		
Anthracite	**1003479**	**9.00**
Lens 19°		
black	**1005205**	**37.00**
Asymmetrical lens		
black/chrome	**1005206**	**37.00**
Reflector 60°		
chrome	**1005207**	**22.00**

BIG THEO
CL





IP44 IK02 24° 30000 h L70B50

100-277 V ~50/60 Hz | 500 mA
Total wattage: 21 W
Material: Aluminium/Glass


LED INSIDE CRI 80

3000 K
2000 lm

Variant	Prod. no.	GBP
Anthracite	**234535**	**180.00**

BIG THEO
CL, QPAR111





IP44 IK02

220-240 V ~50/60 Hz
Material: Aluminium/Glass

SOCKET INSIDE 75 W

Base: 1xGU10

Variant	Prod. no.	GBP
Anthracite	**229555**	**109.00**
white	**229551**	**109.00**
grey	**229554**	**109.00**


GU10 | 13 W | 12°
650 lm | 3000 K | EEC = F

Prod. no.: **1005278** **48.00 GBP**


1004677 763

OVALISK
CL





IP65 IK02 30000 h L70B50 20

220-240 V ~50/60 Hz | 350 mA
Total wattage: 7.9 W
Material: Aluminium/Glass

- The light colour must be set prior to installation


LED INSIDE CCT CRI 80

3000 K	4000 K
540 lm	570 lm

Variant	Prod. no.	GBP
● Anthracite	**1004677**	**241.00**

MOLAT
CL, E27





IP44 IK02

220-240 V ~50/60 Hz
Material: Aluminium/Glass

SOCKET INSIDE 60 W

Base: 1xE27	max. Ø: 6.5 cm	L: 14.5 cm

Variant	Prod. no.	GBP
● Anthracite	**1000823**	**113.00**

E27 | 8 W | 320°
700 lm | 2500 K | EEC = F


C,L

Prod. no.: **1005265** **23.00 GBP**


1000339 765

SITRA
CL, TCR-TSE





IP44 IK02

220-240 V ~50/60 Hz
Material: Aluminium/Glass

SOCKET INSIDE 9 W

Base: 1xG53 max. Ø: 7.5 cm | L: 3.5 cm

Variant	Prod. no.	GBP
● Anthracite	**231545**	**77.00**
○ white	**231541**	**77.00**


GX53 | 6 W | 120°
490 lm | 2700 K | EEC = G

C,L

Prod. no.: 1005272 10.00 GBP

ROX
CL, QPAR111





IP44 IK02

220-240 V ~50/60 Hz
Material: Aluminium/Glass

SOCKET INSIDE 50 W

Base: 1xGU10

Variant	Prod. no.	GBP
● aluminium	**1000332**	**113.00**


GU10 | 13 W | 12°
650 lm | 3000 K | EEC = F

C

Prod. no.: 1005278 48.00 GBP

ROX
CL, GX53





IP44

220-240 V ~50/60 Hz
Material: Aluminium/Glass

SOCKET INSIDE 11 W

Base: 1xG53 max. Ø: 7.5 cm | L: 3.5 cm

Variant	Prod. no.	GBP
● aluminium	**1000339**	**142.00**

GX53 | 6 W | 120°
490 lm | 3000 K | EEC = G

C,L

Prod. no.: 1005271 10.00 GBP

SYMBOLS KEY

Recommendations
Displays accessories and recommended light bulbs for the chosen products

Mix & Match
Indicates products that can be combined

Energy efficiency class
"This light is suitable for bulbs with an energy efficiency rating of ..."

Protection classes
- Protection class I / Protective conductor
- Protection class II/ Protection by double or reinforced insulation
- Protection class III/ Protection by extra-low voltage

Dimmable with:
- **C** = Trailing-edge phase dimmer
- **L** = Leading-edge phase dimmer
- **Uni** = Universal dimmer
- **1–10 V**
- **Dali** = DALI bus system
- **Switch** = Switch/button or touch control on the light
- **Touch** = Simple, stepless operation; responds to touch

IP protection rating:
Indicates the suitability of electrical equipment for different environmental conditions.

IK impact resistance rating:
The IK impact resistance rating is a measure of the resistance of housings for electrical equipment to mechanical stress, especially impact stress.

Half-diffusion angle:
Describes the beam angle in degrees. The smaller the angle, the more concentrated the light will be.

Rotation and pivoting capacity in degrees:
- Rotation range
- Pivot range
- Gimballed

Preservation of luminous flux:
Describes the amount by which the luminous flux of an LED decreases during a specified period.

Unified Glare Rating:
The lower the UGR value, the lower the psychological glare.

Pendant cable length
in cm

Cable length:
Mains plugs, connectors and supply cables (with open cable end) in cm

Through-wiring possible

Shape of the installation opening

Specification of the installation depth

Drive-over capability of the product ensured

Weight-bearing capacity of the product up to the specified value in tonnes. Measurements based on installation in concrete.

Sea-air resistant coating

Independent converter:
Control equipment also for use outside of lights

Short-circuit protected safety control equipment

Light colour temperature in Kelvin (K)

Luminous flux in lumens (lm)

Dark Sky
Indicates that the light emits almost no light into the upper half-space (ULOR < 2 %). Reduces light pollution and ensures targeted, needs-based illumination of the usable area.

Primary/Replica
Indicates lights with integrated primary/replica function. A sensor light (primary) controls downstream lights (replica) via a switched phase, enabling simple, networked lighting control without additional bus or control systems.

Connected lighting:
Indicates smart products that use the following protocols:
- Zigbee®
- DALI
- Bluetooth

Allows the installation of electrical control equipment on materials whose flammability is not known.

CCT switch:
By means of an integrated CCT switch, the light colour can be changed from 2700 K, 3000 K, 4000 K to 6500 K during installation.

Dim-to-warm:
With dimmers, the light colour can be altered from cold white to warm white.

Indicates lights with RGB+W and RGB
(Red-Green-Blue + White and Red-Green-Blue)

Indicates lights with motion sensors
(Microwaves (MR) - Technology / Infrared / Radio)

Products with integrated LEDs

Products with light socket

KS Licht – Your lighting wholesaler in Essen

Contact, customer service and information for customers
BIG WHITE 2027

Directly linked to our product range, advice and project services:

In the KS Multi Brand Business online shop, you will find the latest products, new releases and special offers, as well as information to support you with advice, quotations and project management:

- Online stock availability check
- Catalogues, browsable catalogues and product links
- Technical data, tender specifications, light distribution curves and LDT files
- Easily find and order spare parts
- View your individual terms and conditions, delivery and payment terms
- Relevant product recommendations, variants and alternative products
- Direct contact with our sales team

Customer Information

All prices are net, plus statutory VAT. The retail prices quoted are recommended retail prices. Upon publication of this catalogue, previous price lists cease to be valid.
Illustrations, colours, shapes, designs and technical specifications are for illustrative purposes only and are not binding. Subject to changes and errors.
Goods are generally dispatched ex works, carriage forward.
For orders with a net value of less than €70.00, a minimum order surcharge of €8.00 will be applied.

Ordering & Delivery

When placing orders, please always specify the item number, colour and quantity. This reduces the need for follow-up enquiries and speeds up processing.
Express and direct deliveries are available on request.
Custom-made items, components assembled to the customer's specifications and lamps are excluded from exchange.
Our General Terms and Conditions apply and are available at www.ks-germany.com/de/agb.

Kontakt

KS Licht- und Elektrotechnik GmbH
Manderscheidtstraße 8 c
45141 Essen
Germany

Verkauf & Service
Tel.: +49 (0)201-89924-0
verkauf@ks-germany.com

Online
ks-light.co.uk
www.ks-germany.com

Pflichtangaben

KS Licht- und Elektrotechnik GmbH · Sitz der Gesellschaft: Essen · Geschäftsführer: Kai Becker
Registergericht: Amtsgericht Essen · Handelsregister: HRB 12736 · Steuer-Nr.: 111/5708/2689 ·
USt-IdNr.: DE190673411

KS Licht- und Elektrotechnik GmbH
Manderscheidtstraße 8 c
45141 Essen
Germany

Tel.: +49 (0)201-89924-0

B2B-Shop: **ks-light.co.uk**
Website: www.ks-germany.com
E-Mail: verkauf@ks-germany.com

Opening hours
Monday – Thursday 08:00 – 16:30
Friday 08:00 – 15:00