

# BOX

14-Dec.-2016

## 1.0 LED

LED 8W | 220-240VAC | 50-60Hz | COB 2-step | incl. PS | phase-cut dim

CE IP20 0,3m 36° P

white texture	146164W
aluminium brushed	146164L
gold	146164G
bronze	146164Q
copper	146164P
black texture	146164B

### LIGHT COLOUR

2700K   >80CRI   600lm	2
3000K   >80CRI   600lm	4
1800-2850K   >90CRI   410lm	9

## 1.0 PAR16

PAR16 max. 35W | GU10 | 100-240VAC | 50-60Hz

CE IP20 0,9m

white texture	146120W0
aluminium brushed	146120L0
gold	146120G0
bronze	146120Q0
copper	146120P0
black texture	146120B0

### OPTIONAL

for PAR16 lamps see our catalogue

### OPTIONAL

single inner reflector max. 10W



white texture	911211W1
gold	911211G1
black texture	911211B1

### OPTIONAL

single inner cover max. 10W


white texture	911011W1
gold	911011G1
black texture	911011B1

### base plate dimensions




### 1.0 LED


### 1.0 PAR16

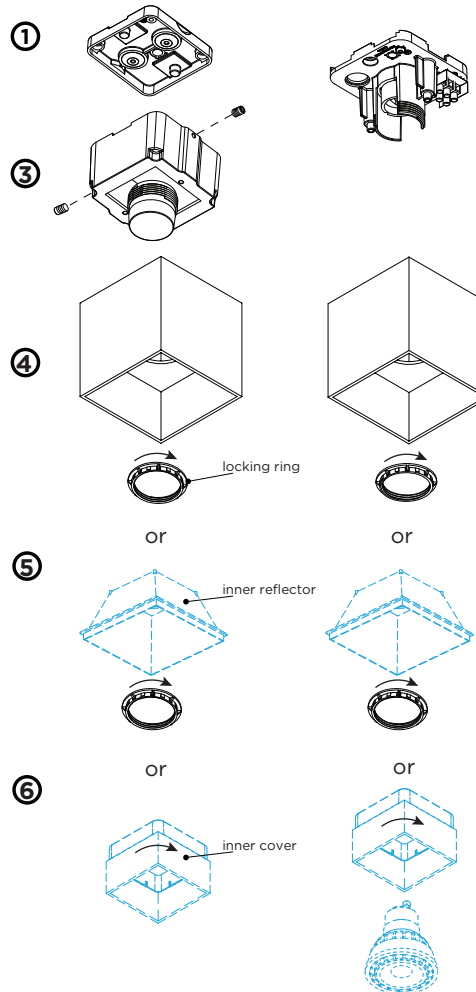

## DIMENSIONS



1.0 LED




1.0 PAR16

## 1 MOUNTING INSTRUCTION

Remove the screws of the top part, put the cables through the opening and mount the base on the ceiling.

## 2 POWER CONNECTION

Connect wiring to the power supply (for LED) or to terminal block (for PAR16)  
interior connection: STANDARD version



STANDARD

## 3 FOR LED

Attach the LED housing on the base by two socket screws.

## 4 FOR LED

Attach the box cover to the LED housing by screwing the locking ring

### FOR PAR16

Attach the box cover to the base by screwing the locking ring

## 5 OPTIONAL inner reflector

Attach the reflector to the box cover by screwing the locking ring.

with inner reflector: **max. 10W**

## 6 OPTIONAL inner cover

put the inner cover in the outer cover by screwing.

with inner cover: **max. 10W**



WEVER & DUCRÉ  
LIGHTING

www.weverducre.com

Wever & Ducre bvba Kwadestraat 153 bus 2.1 8800 Roeselare

INSTALLATION  
INSTRUCTIONS

PAGE 1/2

# BOX

14-Dec.-2016

## 1.0 LED

**LED** 8W | 220-240VAC | 50-60Hz | COB 2-step | incl. PS | phase-cut dim

CE IP65 10.3m 36° P

white texture	735164W_
dark grey texture	735164D_
black texture	735164B_

### LIGHT COLOUR

3000K   >80CRI   600lm	4
1800-2850K   >90CRI   410lm	9

### OPTIONAL

single inner reflector max. 10W


white texture	911211W1
dark grey texture	911211D1
black texture	911211B1

### OPTIONAL

single inner cover max. 10W


white texture	911011W1
dark grey texture	911011D1
black texture	911011B1

### base plate dimensions




## 1.0 LED


①



③




④




or

⑤




or

⑥



## DIMENSIONS




1.0 LED

### ① MOUNTING INSTRUCTION

Remove the screws of the top part, put the cables through the opening and mount the base on the ceiling.

### ② POWER CONNECTION

Connect wiring to the power supply  
exterior connection: WATERPROOF version (only for LED)



③ Attach the LED housing on the base by two socket screws.

④ Attach the box cover to the LED housing by screwing the locking ring

⑤ **OPTIONAL inner reflector**  
Attach the reflector to the box cover by screwing the locking ring.

With inner reflector: **max. 10W**

⑥ **OPTIONAL inner cover**  
put the inner cover in the outer cover by screwing.  
with inner cover: **max. 10W**



**WEVER & DUCRÉ**  
LIGHTING

[www.weverducre.com](http://www.weverducre.com)

Wever & Ducre bvba Kwadestraat 153 bus 2.1 8800 Roeselare

**INSTALLATION  
INSTRUCTIONS**

PAGE 2/2