BIG WHITE®
2027

SLV LIGHTING CATALOGUE



PROFILE SOLUTIONS AND LED STRIPS

PROFILES AND LED STRIPS

SETS



S


LED STRIP SETS –
LED STRIP S + DRIVER | 612



S

PROFILE SETS –
S SURFACE-MOUNTED PROFILE + DIFFUSER | 613

LED STRIPS



XS

COB LED STRIPS | 614



XS

SMD LED STRIPS | 615



S

COB LED STRIPS | 616



S

SMD LED STRIPS | 617



S

LED STRIPS COB
TW & RGBW | 618



S

LED STRIPS SMD
TW & RGBW | 619



S

LED STRIPS COB IP67 |
620



S

LED STRIPS SMD IP67 |
621



M

COB LED STRIPS | 622



M

SMD LED STRIPS | 623



ACCESSORIES |
624–625

PROFILES




XS

PROFILE SETS
AND ACCESSORIES |
626–627



S

PROFILE SETS
AND ACCESSORIES |
628–629



M

PROFILE SETS
AND ACCESSORIES |
630–631




L

RECESSED PROFILE
AND ACCESSORIES |
632

THE NEW LED STRIP SYSTEM

The new LED strip system makes selection, planning and installation easier. Thanks to the standardised sizing system, LED strips, profiles and accessories can be combined quickly and intuitively.

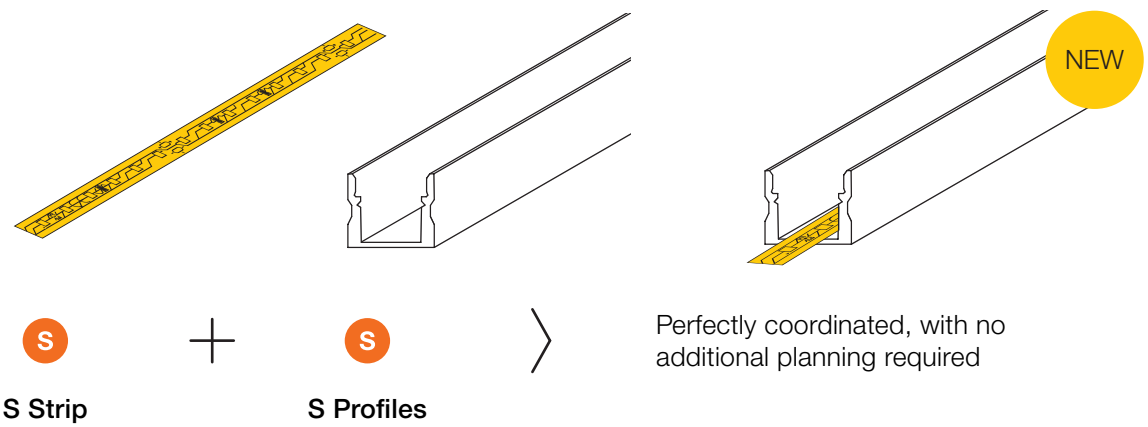


SIZES AND APPLICATIONS


Size	LED STRIP width	Internal width of the profile	Typical application
XS	5 mm	8–10 mm	Furniture, shelving, display cabinets and accent lighting
S	8–12 mm	12–14 mm	Living spaces, direct and indirect lighting
M	15–18 mm	20 mm	High-performance lighting for indirect lighting schemes and general lighting
L	–	40 mm	Architectural lighting, extra-wide light lines and special applications

PROFILES FOR EVERY APPLICATION


Surface-mounted




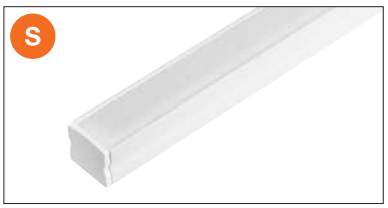

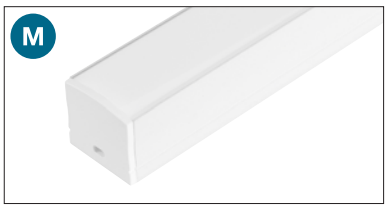

Surface-mounted, flat

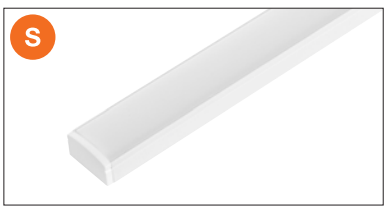


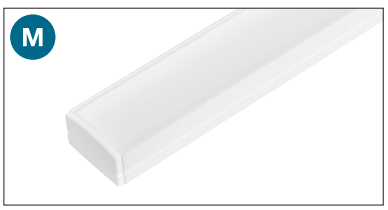


Recessed






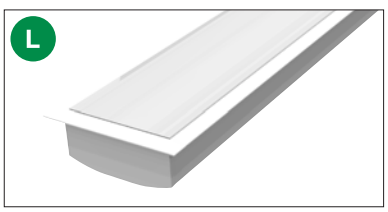


Recessed, corner

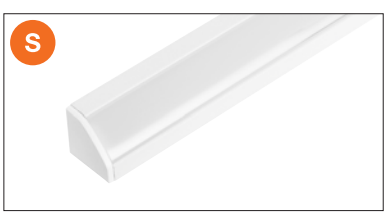


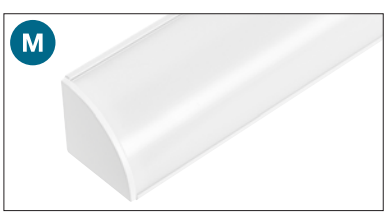

Tiles

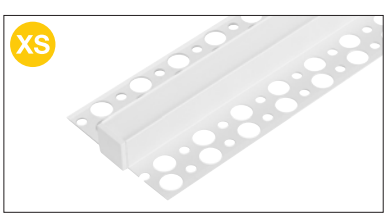

Plaster

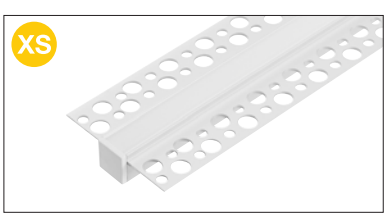

SLV profiles are supplied with accessories such as end caps, covers and mounting clips. This reduces the effort involved in placing orders and simplifies planning.

Accessories included

SOPHISTICATED TECHNOLOGY

COB OR SMD – THE CHOICE IS YOURS

COB strips produce a uniform light pattern with no visible light spots. SMD strips offer high efficiency and light output for a wide range of applications.


	COB	SMD
Light pattern	Continuous light line	Visible LED dots
Light output & efficiency	High	Very high
Key strength	A uniform and high-quality lighting effect	High light efficiency and cost-effectiveness
Typical application	Visible light lines, indirect lighting, sophisticated lighting concepts	High-efficiency general and task lighting

EASY PLANNING

All SLV profiles are supplied with the necessary accessories, such as end caps and mounting clips. In addition, pre-configured sets simplify planning, ordering and installation.

PROFILE SETS

Pre-configured sets comprising profiles, end caps, covers and mounting clips.

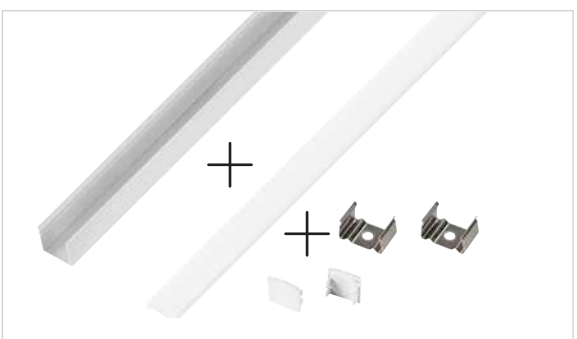

STRIP SETS

Pre-configured sets comprising LED strips, drivers and connecting components.



EASY TO INSTALL


QUICK CABLING

All LED strips are supplied with exposed cable ends at both ends.
For static white lighting, plug-in and HUB solutions enable a quick connection between the driver and the LED strip – with no soldering required.



FLEXIBLE CONNECTION SOLUTIONS

A range of connectors makes it easier to create customised strip layouts.
A suitable accessory kit is available for IP67 strips, enabling the connectors and connection points to comply with the IP67 standard.

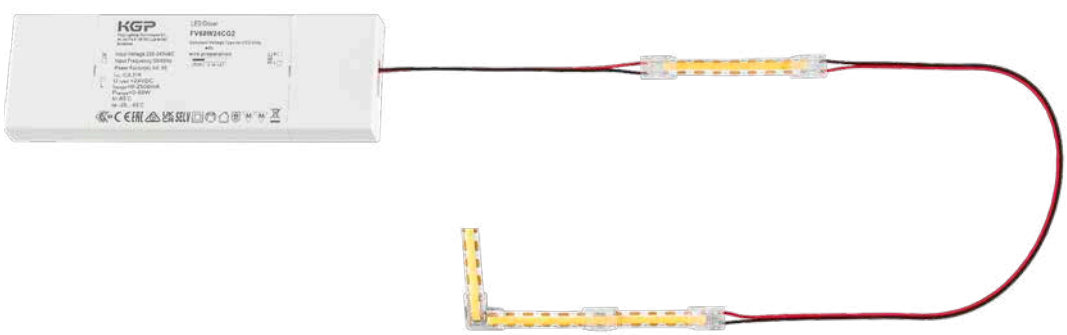


S LED STRIP SETS

LED STRIP S + DRIVER

L: 500 cm
SDMC: 3

NEW

50000h L80B20 | CRI 90

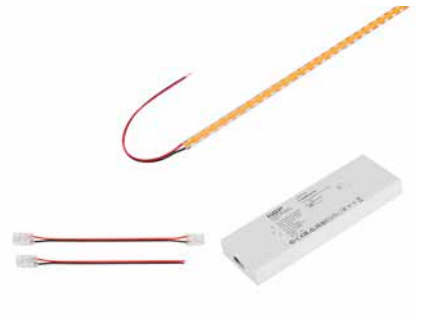

* The stated value applies only to the first metre of the LED strip.

Variant	lm/m*	W/m*	Colour temperature	Width	LED/m	Separation distance	Prod. no.	GBP
LED STRIP SET STRIP COB + DRIVER | S	880	9.5	2700 K	0.8 cm	480	0.83 cm	**1012464**	**105.00**
	950		3000 K				**1012465**	
	980		4000 K				**1012466**	
LED STRIP SET IP67 STRIP COB + IP67 DRIVER | S	850	9.5	3000 K	1 cm	480	0.83 cm	**1012467**	**138.00**
LED STRIP SET STRIP SMD + DRIVER | S	1110	9	2700 K	0.8 cm	100	1 cm	**1012474**	**96.00**
	1150		3000 K				**1012475**	
	1170		4000 K				**1012476**	
LED STRIP SET IP67 STRIP SMD + IP67 DRIVER | S	1060	9	3000 K	1 cm	160	5 cm	**1012473**	**130.00**



S PROFILE SETS

SURFACE-MOUNTED PROFILE S + DIFFUSER

NEW



IP20

Set contents: 5 x 1 m profiles, 10 x end caps, 10 x mounting clips, 5 x 1 m diffusers

Variant	Size	Length	Colour	Prod. no.	GBP
LED STRIP SET PROFIL SURFACE+ DIFFUSER 5*1M	S	5 x 100 cm	● Black	**1012477**	**61.00**
LED STRIP SET PROFIL SURFACE+ DIFFUSER 5*1M	S	5 x 100 cm	○ White	**1012478**	**61.00**
LED STRIP SET PROFILE SURFACE FLAT+ DIFFUSER 5*1M	S	5 x 100 cm	● Black	**1012479**	**52.00**
LED STRIP SET PROFILE SURFACE FLAT+ DIFFUSER 5*1M	S	5 x 100 cm	○ White	**1012480**	**52.00**



XS COB LED STRIPS

LED STRIP COB | XS

L: 500 cm
SDCM: 3

NEW

IP20 | 50000h L80B20 | CRI 90



* The stated value applies only to the first metre of the LED strip.

	lm/m*	W/m*	Colour temperature	Width	LED/m	Separation distance	Prod. no.	GBP
	480	5.4	2700 K	0.5 cm	480	0.83 cm	**1012239**	**56.00**
	480		3000 K				**1012240**	
	510		4000 K				**1012241**	






Accessories	LED STRIP CONNECTOR² COB | FEEDER XS	LED STRIP CONNECTOR² COB | 90° XS	LED STRIP CONNECTOR² COB | DIRECT XS	LED STRIP CONNECTOR² COB | WIRE XS
Prod. no.	**1012283**	**1012298**	**1012293**	**1012288**
GBP	**7.00**	**10.00**	**8.00**	**12.00**

² Packaging unit: 5 pieces

XS SMD LED STRIPS

LED STRIP SMD | XS

L: 500 cm
SDCM: 3

NEW



IP20 | 50000 h L80B20 | CRI 90

* The stated value applies only to the first metre of the LED strip.

	lm/m*	W/m*	Colour temperature	Width	LED/m	Separation distance	Prod. no.	GBP
	500	4.8	2700 K	0.5 cm	140	5 cm	**1012259**	**43.00**
	510		3000 K				**1012260**	
	520		4000 K				**1012261**	






Accessories	LED STRIP CONNECTOR[2] SMD | FEEDER XS	LED STRIP CONNECTOR[2] SMD | 90° XS	LED STRIP CONNECTOR[2] SMD | DIRECT XS	LED STRIP CONNECTOR[2] SMD | WIRE XS
Prod. no.	**1012304**	**1012319**	**1012314**	**1012309**
GBP	**7.00**	**7.00**	**6.00**	**11.00**

[2] Packaging unit: 5 pieces

S COB LED STRIPS

LED STRIP COB | S

L: 500 cm
SDCM: 3

NEW



IP20 | 50000h L80B20 | CRI 90

* The stated value applies only to the first metre of the LED strip.

	lm/m*	W/m*	Colour temperature	Width	LED/m	Separation distance	Prod. no.	GBP
	880	9.5	2700 K	0.8 cm	480	0.83 cm	**1012242**	**60.00**
	950		3000 K				**1012243**	
	980		4000 K				**1012244**	
	1370	12	2700 K	0.8 cm	480	0.83 cm	**1012245**	**77.00**
	1350		3000 K				**1012246**	
	1600		4000 K				**1012247**	






Accessories	LED STRIP CONNECTOR[2] COB | FEEDER S	LED STRIP CONNECTOR[2] COB | WIRE S	LED STRIP CONNECTOR[2] COB | DIRECT S	LED STRIP CONNECTOR[2] COB | 90° S
Prod. no.	**1012284**	**1012289**	**1012294**	**1012299**
GBP	**8.00**	**13.00**	**8.00**	**10.00**

[2] Packaging unit: 5 pieces

S SMD LED STRIPS

LED STRIP SMD | S

L: 500 cm
SDCM: 3

NEW



IP20 | 50000h L80B20 | CRI 90

* The stated value applies only to the first metre of the LED strip.

	lm/m*	W/m*	Colour temperature	Width	LED/m	Separation distance	Prod. no.	GBP
	1000	9	2700 K	0.8 cm	100	1 cm	**1012262**	**42.00**
	1050		3000 K				**1012263**	
	1100		4000 K				**1012264**	
	1600	13.5	2700 K	0.8 cm	160	1.25 cm	**1012265**	**57.00**
	1650		3000 K				**1012266**	
	1760		4000 K				**1012267**	
	1900	15.2	2700 K	1 cm	160	5 cm	**1012268**	**77.00**
	2000		3000 K				**1012269**	
	2100		4000 K				**1012270**	






Accessories	LED STRIP CONNECTOR[2] SMD | FEEDER S 8MM	LED STRIP CONNECTOR[2] SMD | WIRE S 8MM	LED STRIP CONNECTOR[2] SMD | DIRECT S 8MM	LED STRIP CONNECTOR[2] SMD | 90° S 8MM
Prod. no.	**1012305**	**1012310**	**1012315**	**1012320**
GBP	**8.00**	**12.00**	**7.00**	**8.00**

Accessories	LED STRIP CONNECTOR[2] SMD | FEEDER S 10MM	LED STRIP CONNECTOR[2] SMD | WIRE S 10MM	LED STRIP CONNECTOR[2] SMD | DIRECT S 10MM	LED STRIP CONNECTOR[2] SMD | 90° S 10MM
Prod. no.	**1012306**	**1012311**	**1012316**	**1012321**
GBP	**8.00**	**12.00**	**7.00**	**8.00**

[2] Packaging unit: 5 pieces

S LED STRIPS COB TW & RGBW

LED STRIP COB TW | S

L: 500 cm
SDCM: 5

IP20 | 50000h L80B20 | CRI 90

NEW



* The stated value applies only to the first metre of the LED strip.

	lm/m*	W/m*	Colour temperature	Width	LED/m	Separation distance	Prod. no.	GBP
	800 / 900	14.4	2700 K / 6500 K	1 cm	640	2.5 cm	**1012253**	**88.00**

LED STRIP COB RGBW | S

L: 500 cm
SDCM: 5

IP20 | 50000h L80B20 | CRI 90

NEW



* The stated value applies only to the first metre of the LED strip.

	lm/m*	W/m*	Colour temperature	Width	LED/m	Separation distance	Prod. no.	GBP
	440 700 1140	18.4	3000 K RGB	1.2 cm	672	8.3 cm	**1012251**	**113.00**







Accessories	LED STRIP CONNECTOR[2] COB | FEEDER TW S	LED STRIP CONNECTOR[2] COB | DIRECT TW S	LED STRIP CONNECTOR[2] COB | WIRE TW S
Prod. no.	**1012287**	**1012297**	**1012292**
GBP	**13.00**	**11.00**	**16.00**

Accessories	LED STRIP CONNECTOR[2] COB | FEEDER RGBW S	LED STRIP CONNECTOR[2] COB | DIRECT RGBW S	LED STRIP CONNECTOR[2] COB | WIRE RGBW S
Prod. no.	**1012286**	**1012296**	**1012291**
GBP	**14.00**	**13.00**	**18.00**

[2] Packaging unit: 5 pieces

S LED STRIPS SMD TW & RGBW

LED STRIP SMD TW | S

L: 500 cm
SDCM: 3

IP20 | 50000 h L80B20 | CRI 90

NEW



* The stated value applies only to the first metre of the LED strip.

	lm/m*	W/m*	Colour temperature	Width	LED/m	Separation distance	Prod. no.	GBP
	930 / 1000	18	2700 K / 6500 K	1 cm	224	6.3 cm	**1012277**	**88.00**

LED STRIP SMD RGBW | S

L: 500 cm
SDCM: 3

IP20 | 50000 h L80B20 | CRI 80

NEW



* The stated value applies only to the first metre of the LED strip.

	lm/m*	W/m*	Colour temperature	Width	LED/m	Separation distance	Prod. no.	GBP
	400 650 1050	20	3000 K RGB	1 cm	120	5 cm	**1012275**	**88.00**






Accessories	LED STRIP CONNECTOR[2] SMD | FEEDER TW S	LED STRIP CONNECTOR[2] SMD | 90° TW S	LED STRIP CONNECTOR[2] SMD | DIRECT TW S	LED STRIP CONNECTOR[2] SMD | WIRE TW S
Prod. no.	**1012308**	**1012323**	**1012318**	**1012313**
GBP	**13.00**	**16.00**	**10.00**	**16.00**

Accessories	LED STRIP CONNECTOR[2] SMD | FEEDER RGBW S	LED STRIP CONNECTOR[2] SMD | 90° RGBW S	LED STRIP CONNECTOR[2] SMD | DIRECT RGBW S	LED STRIP CONNECTOR[2] SMD | WIRE RGBW S
Prod. no.	**1012307**	**1012322**	**1012317**	**1012312**
GBP	**14.00**	**17.00**	**11.00**	**17.00**

[2] Packaging unit: 5 pieces

S LED STRIPS COB IP67

LED STRIP COB IP67 | S

L: 500 cm
SDCM: 3
Find the compatible sealing kit on page 653.

IP67 · 50000h L80B20 · CRI 90

NEW



* The stated value applies only to the first metre of the LED strip.

	lm/m*	W/m*	Colour temperature	Width	LED/m	Separation distance	Prod. no.	GBP
	800	10	2700 K	1 cm	480	0.83 cm	**1012255**	**77.00**
	900		3000 K				**1012256**	
	1320	12	2700 K				**1012257**	**82.00**
	1400		3000 K				**1012258**	

LED STRIP COB IP67 TW | S

TW

L: 500 cm
SDCM: 5
Find the compatible sealing kit on page 653.

IP67 · 50000h L80B20 · CRI 90

NEW



* The stated value applies only to the first metre of the LED strip.

	lm/m*	W/m*	Colour temperature	Width	LED/m	Separation distance	Prod. no.	GBP
	760 / 860	14.4	2700 K / 6500 K	1.2 cm	640	2.5 cm	**1012254**	**113.00**

LED STRIP COB IP67 RGBW | S

RGB +W

L: 500 cm
SDCM: 5
Find the compatible sealing kit on page 653.

IP67 · 50000h L80B20 · CRI 90

NEW



* The stated value applies only to the first metre of the LED strip.

	lm/m*	W/m*	Colour temperature	Width	LED/m	Separation distance	Prod. no.	GBP
	1070	18	3000 K	1.4 cm	672	8.3 cm	**1012252**	**155.00**

S LED STRIPS SMD IP67

LED STRIP SMD IP67 | S

L: 500 cm
SDCM: 5
Find the compatible sealing kit on page 653.

IP67 · 50000h L80B20 · CRI 90

NEW



* The stated value applies only to the first metre of the LED strip.

	lm/m*	W/m*	Colour temperature	Width	LED/m	Separation distance	Prod. no.	GBP
	980	8.6	2700 K	1 cm	160	5 cm	**1012279**	**69.00**
	1000		3000 K				**1012280**	
	1650	15.5	2700 K				**1012281**	**73.00**
	1750		3000 K				**1012282**	

LED STRIP SMD TW | S

TW

L: 500 cm
SDCM: 5
Find the compatible sealing kit on page 653.

IP67 · 50000h L80B20 · CRI 90

NEW



* The stated value applies only to the first metre of the LED strip.

	lm/m*	W/m*	Colour temperature	Width	LED/m	Separation distance	Prod. no.	GBP
	880 / 950	18	2700 K / 6500 K	1.2 cm	224	6.3 cm	**1012278**	**105.00**

LED STRIP SMD RGBW | S

RGB +W

L: 500 cm
SDCM: 5
Find the compatible sealing kit on page 653.

IP67 · 50000h L80B20 · CRI 80

NEW



* The stated value applies only to the first metre of the LED strip.


	lm/m*	W/m*	Colour temperature	Width	LED/m	Separation distance	Prod. no.	GBP
	1000	20	3000 K	1.2 cm	120	5 cm	**1012276**	**121.00**

M COB LED STRIPS

LED STRIP COB | M

L: 500 cm
SDCM: 3

NEW

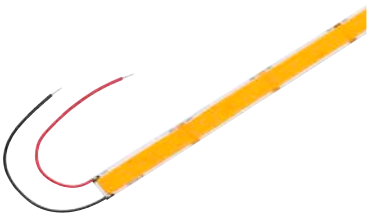

IP20 50000h L80B20 CRI 90

* The stated value applies only to the first metre of the LED strip.

	lm/m*	W/m*	Colour temperature	Width	LED/m	Separation distance	Prod. no.	GBP
	2700	25	2700 K	1.5 cm	960	5 cm	**1012248**	**130.00**
	2800		3000 K				**1012249**	
	2800		4000 K				**1012250**	

M SMD LED STRIPS

LED STRIP SMD | M

L: 500 cm
SDCM: 3

NEW



IP20 | 50000h L80B20 | CRI 90

* The stated value applies only to the first metre of the LED strip.

	lm/m*	W/m*	Colour temperature	Width	LED/m	Separation distance	Prod. no.	GBP
	2400	20	2700 K	1.8 cm	320	5 cm	**1012272**	**113.00**
	2600		3000 K				**1012273**	
	2650		4000 K				**1012274**	

⊕ ACCESSORIES

COMPACT POWER SUPPLY | ON/OFF

	Variant	Output	Length	Width	Height	Prod. no.	GBP
	LED POWER SUPPLY 24V | 24W	24 W	13.7 cm	5 cm	1.6 cm	**1008653**	**34.00**
	LED POWER SUPPLY 24V | 36W	36 W	17 cm	5.7 cm	1.8 cm	**1008654**	**47.00**
	LED POWER SUPPLY 24V | 60W	60 W				**1008655**	**56.00**

COMPACT POWER SUPPLY | PHASE DIMMING

	Variant	Output	Length	Width	Height	Prod. no.	GBP
	POWER SUPPLY | 50W | 24V	50 W	18.4 cm	6.1 cm	3.2 cm	**1003104**	**43.00**
	POWER SUPPLY | 100W | 24V DC	100 W	21 cm	6.7 cm	3.4 cm	**1003105**	**104.00**
	LED POWER SUPPLY | 25W | 24V	25 W	12.8 cm	5.2 cm	3 cm	**1006336**	**30.00**

SLIM POWER SUPPLY | ON/OFF

	Variant	Output	Length	Width	Height	Prod. no.	GBP
	LED POWER SUPPLY | 30W | 24V DC INCL. STRAIN RELIEF	30 W	30 cm	3 cm	1.6 cm	**1007250**	**43.00**
	LED POWER SUPPLY | 100W | 24V DC INCL. STRAIN RELIEF	100 W	35 cm		1.8 cm	**1007251**	**69.00**
	LED POWER SUPPLY | 150W | 24V DC INCL. STRAIN RELIEF	150 W				**1007252**	**86.00**
	LED POWER SUPPLY | 250W | 24V DC INCL. STRAIN RELIEF	250 W	40 cm	4 cm	2.2 cm	**1007253**	**103.00**

SLIM POWER SUPPLY | DALI

	Variant	Output	Length	Width	Height	Prod. no.	GBP
	LED POWER SUPPLY | 30W | 24V DC DALI DIMMABLE INCL. STRAIN RELIEF	30 W	30 cm	3 cm	1.6 cm	**1007254**	**52.00**
	LED POWER SUPPLY | 100W | 24V DC DALI DIMMABLE INCL. STRAIN RELIEF	100 W	35 cm		1.8 cm	**1007255**	**95.00**
	LED POWER SUPPLY | 150W | 24V DC DALI DIMMABLE INCL. STRAIN RELIEF	150 W				**1007256**	**121.00**
	LED POWER SUPPLY | 250W | 24V DC DALI DIMMABLE INCL. STRAIN RELIEF	250 W	40 cm	4 cm	2.2 cm	**1007257**	**138.00**

ROUND POWER SUPPLY

	Variant	Output		Ø	Height	Prod. no.	GBP
	LED POWER SUPPLY 24V | 25W, ROUND	25 W		5.5 cm	2.5 cm	**1008652**	**23.00**

IP67 POWER SUPPLY

	Variant	Output	Length	Width	Height	Prod. no.	GBP
	LED POWER SUPPLY 24V | 60W, IP67	60 W	16.5 cm	4.5 cm	3.2 cm	**1012605**	**55.00**

CONTROL UNITS

	Variant	Output	Length	Width	Height	Prod. no.	GBP
	CONTROLLER | LED STRIP CCT / RGBW	96 W	14.5 cm	4.7 cm	1.6 cm	**1006348**	**69.00**
	REMOTE CONTROL | ZIGBEE, CCT/RGBW	-	14 cm	4.4 cm	1.7 cm	**1007827**	**68.00**
	CONTROLLER DALI, DT8 | 5 CHANNEL	180 W	17 cm	5.3 cm	2.8 cm	**1007997**	**103.20**

CONNECTOR

	Variant		Length	Width	Height	Prod. no.	GBP
	LED STRIP QUICK PLUG[2]		2.2 cm	1 cm	0.6 cm	**1012325**	**10.00**
	LED STRIP HUB | 2 PLUGS		3.1 cm	2.8 cm	1 cm	**1012328**	**5.00**
	LED STRIP HUB | 4 PLUGS		5.7 cm	3.1 cm	0.9 cm	**1012329**	


SEALING KITS

	Variant					Prod. no.	GBP
	LED STRIP IP SEALING KIT | 8MM					**1012303**	**6.00**
	LED STRIP IP SEALING KIT | 10MM					**1012603**	**6.00**
	LED STRIP IP SEALING KIT | 12MM					**1012604**	**7.00**


[2]Packaging unit: 5 pieces

XS PROFILE SETS


LED STRIP PROFILE SURFACE | XS

	Variant	Size	Length	Colour	Material	Prod. no.	GBP
	LED STRIP PROFILE SURFACE	XS	200 cm	○ White	Aluminium/PC	1012331	24.00
	LED STRIP PROFILE SURFACE			● Black		1012330	

LED STRIP PROFILE RECESSED TILES | XS

	Variant	Size	Length	Colour	Material	Prod. no.	GBP
	LED STRIP PROFILE RECESSED TILES	XS	200 cm	Aluminium	Aluminium/PC	1012348	35.00

LED STRIP PROFILE RECESSED PLASTER | XS

	Variant	Size	Length	Colour	Material	Prod. no.	GBP
	LED STRIP PROFILE RECESSED PLASTER	XS	200 cm	Aluminium	Aluminium/PC	1012349	39.00

⊕

	Variant	Size	Length	Colour	Material	Prod. no.	GBP
	BLACK SURFACE DIFFUSER	XS	200 cm	● Black	Plastic PC	1012538	7.00
	OPAL SURFACE DIFFUSER	XS	200 cm	○ Opal	Plastic PC	1012536	7.00
	END CAPS SURFACE	XS	-	● Black	Plastic PC	1012554	4.00
	END CAPS SURFACE	XS	-	○ White	Plastic PC	1012555	4.00
	MOUNTING CLIP SURFACE	XS	1.2 cm	Silver	Stainless steel	1012574	4.00
	SURFACE PENDANT KIT		200 cm	Silver	Stainless steel	1012583	12.00


[1] Packaging unit: 2 pieces

Set contents: 2m profile, 2m diffuser, 2 x end caps, 4 x mounting clips (for the Surface version only)









	Variant	Size	Length	Colour	Material	Prod. no.	GBP
	DIFFUSER TILES AND BLACK PLASTER	XS	200 cm	● Black	Plastic PC	**1012541**	**7.00**
	DIFFUSER TILES AND OPAL PLASTER	XS	200 cm	○ Opal	Plastic PC	**1012539**	**7.00**
	END CAPS[1] TILES	XS	-	● Grey	Plastic PC	**1012556**	**4.00**
	END CAPS[1] PLASTER	XS	-	● Grey	Plastic PC	**1012557**	**4.00**

S PROFILE SETS


LED STRIP PROFILE SURFACE | S

	Variant	Size	Length	Colour	Material	Prod. no.	GBP
	LED STRIP PROFILE SURFACE	S	200 cm	● Black	Aluminium/PC	**1012332**	**26.00**
	LED STRIP PROFILE SURFACE	S	200 cm	○ White	Aluminium/PC	**1012333**	


LED STRIP PROFILE SURFACE FLAT | S

	Variant	Size	Length	Colour	Material	Prod. no.	GBP
	LED STRIP PROFILE SURFACE FLAT	S	200 cm	● Black	Aluminium/PC	**1012336**	**22.00**
	LED STRIP PROFILE SURFACE FLAT	S	200 cm	○ White	Aluminium/PC	**1012337**	

LED STRIP PROFILE CORNER | S

	Variant	Size	Length	Colour	Material	Prod. no.	GBP
	LED STRIP PROFILE CORNER	S	200 cm	● Black	Aluminium/PC	**1012340**	**30.00**
	LED STRIP PROFILE CORNER	S	200 cm	○ White	Aluminium/PC	**1012341**	

LED STRIP PROFILE RECESSED | S

	Variant	Size	Length	Colour	Material	Prod. no.	GBP
	LED STRIP PROFILE RECESSED	S	200 cm	● Black	Aluminium/PC	**1012344**	**30.00**
	LED STRIP PROFILE RECESSED	S	200 cm	○ White	Aluminium/PC	**1012345**	

⊕

	Variant	Size	Length	Colour	Material	Prod. no.	GBP
	DIFFUSER BLACK	S	200 cm	● Black	Plastic PC	**1012547**	**7.00**
	DIFFUSER OPAL	S	200 cm	○ Opal	Plastic PC	**1012545**	**7.00**
	END CAPS [1]SURFACE	S	-	● Black	Plastic PC	**1012558**	**5.00**
	END CAPS[1] SURFACE	S	-	○ White	Plastic PC	**1012559**	**5.00**
	CONNECTOR SURFACE FLAT	S	3.5 cm	● Grey	Plastic PC	**1012584**	**7.00**
	END CAPS[1] SURFACE FLAT	S	-	● Black	Plastic PC	**1012560**	**5.00**
	END CAPS[1] SURFACE FLAT	S	-	○ White	Plastic PC	**1012561**	**5.00**
	MOUNTING CLIP[1] SURFACE	S	1.2 cm	● Silver	Stainless steel	**1012575**	**5.00**
	MOUNTING CLIP[1] SURFACE FLAT	S	1.2 cm	● Silver	Stainless steel	**1012576**	**5.00**

[1] Packaging unit: 2 pieces

Set contents: 2 m profile, 2 m diffuser, 2 x end caps, 4 x mounting clips











	Variant	Size	Length	Colour	Material	Prod. no.	GBP
	SURFACE PENDANT KIT		200 cm	Silver	Stainless steel	**1012583**	**12.00**
	END CAPS[1] CORNER	S	-	Black	Plastic PC	**1012562**	**5.00**
	END CAPS[1] CORNER	S	-	White	Plastic PC	**1012563**	**5.00**
	MOUNTING CLIP[1] CORNER	S	2 cm	Silver	Stainless steel	**1012577**	**5.00**
	END CAPS[1] RECESSED	S	-	Black	Plastic PC	**1012564**	**5.00**
	END CAPS[1] RECESSED	S	-	White	Plastic PC	**1012565**	**5.00**
	MOUNTING SPRINGS[1] RECESSED	S	-	Silver	Stainless steel	**1012578**	**5.00**

M PROFILE SETS


LED STRIP PROFILE SURFACE | M

	Variant	Size	Length	Colour	Material	Prod. no.	GBP
	LED STRIP PROFILE SURFACE	M	200 cm	● Black	Aluminium/PC	**1012334**	**35.00**
	LED STRIP PROFILE SURFACE	M	200 cm	○ White	Aluminium/PC	**1012335**	


LED STRIP PROFILE SURFACE FLAT | M

	Variant	Size	Length	Colour	Material	Prod. no.	GBP
	LED STRIP PROFILE SURFACE FLAT	M	200 cm	● Black	Aluminium/PC	**1012338**	**31.00**
	LED STRIP PROFILE SURFACE FLAT	M	200 cm	○ White	Aluminium/PC	**1012339**	

LED STRIP PROFILE CORNER | M

	Variant	Size	Length	Colour	Material	Prod. no.	GBP
	LED STRIP PROFILE CORNER	M	200 cm	● Black	Aluminium/PC	**1012342**	**39.00**
	LED STRIP PROFILE CORNER	M	200 cm	○ White	Aluminium/PC	**1012343**	

LED STRIP PROFILE RECESSED | M

	Variant	Size	Length	Colour	Material	Prod. no.	GBP
	LED STRIP PROFILE RECESSED	M	200 cm	● Black	Aluminium/PC	**1012346**	**43.00**
	LED STRIP PROFILE RECESSED	M	200 cm	○ White	Aluminium/PC	**1012347**	

⊕

	Variant	Size	Length	Colour	Material	Prod. no.	GBP
	DIFFUSER BLACK	M	200 cm	● Black	Plastic PC	**1012550**	**8.00**
	DIFFUSER OPAL	M	200 cm	○ Opal	Plastic PC	**1012548**	**8.00**
	END CAPS[1] SURFACE	M	-	● Black	Plastic PC	**1012566**	**6.00**
	END CAPS[1] SURFACE	M	-	○ White	Plastic PC	**1012567**	**6.00**
	MOUNTING CLIP[1] SURFACE	M	1.6 cm	● Silver	Stainless steel	**1012579**	**6.00**
	MOUNTING CLIP[1] SURFACE FLAT	M	1.6 cm	● Silver	Stainless steel	**1012580**	**6.00**
	END CAPS[1] SURFACE FLAT	M	-	● Black	Plastic PC	**1012568**	**6.00**
	END CAPS[1] SURFACE FLAT	M	-	○ White	Plastic PC	**1012569**	**6.00**
	SURFACE PENDANT KIT		200 cm	● Silver	Stainless steel	**1012583**	**12.00**

[1] Packaging unit: 2 pieces

Set contents: 2 m profile, 2 m diffuser, 2 x end caps, 4 x mounting clips











	Variant	Size	Length	Colour	Material	Prod. no.	GBP
	END CAPS[1] RECESSED	M	-	● Black	Plastic PC	**1012572**	**6.00**
	END CAPS[1] RECESSED	M	-	○ White	Plastic PC	**1012573**	**6.00**
	MOUNTING SPRINGS[1] RECESSED	M	-	Silver	Stainless steel	**1012582**	**6.00**
	DIFFUSER CORNER BLACK	M	200 cm	● Black	Plastic PC	**1012553**	**10.00**
	DIFFUSER CORNER OPAL	M	200 cm	○ Opal	Plastic PC	**1012551**	**10.00**
	END CAPS[1] CORNER	M	-	● Black	Plastic PC	**1012570**	**6.00**
	END CAPS[1] CORNER	M	-	○ White	Plastic PC	**1012571**	**6.00**
	MOUNTING CLIPS[1] CORNER	M	3.4 cm	Silver	Stainless steel	**1012581**	**6.00**

L RECESSED PROFILE



RECESSED PROFILE | L

	Variant	Size	Length	Colour	Material	Prod. no.	GBP
	LED STRIP PROFILE RECESSED	L	150 cm	● Black	Aluminium	**1004905**	**58.00**
	LED STRIP PROFILE RECESSED	L	150 cm	○ White	Aluminium	**1004906**	
	LED STRIP PROFILE RECESSED	L	300 cm	● Black	Aluminium	**1004907**	**117.00**
	LED STRIP PROFILE RECESSED	L	300 cm	○ White	Aluminium	**1004908**	

⊕

	Variant	Size	Length	Colour	Material	Prod. no.	GBP
	COVER	L	150 cm	○ Opal	Polymethyl-methacrylate (PMMA)	**1004916**	**21.00**
	COVER	L		○ Opal	Polycarbonate (PC)	**1004914**	**16.00**
	COVER	L	300 cm	○ Opal	Polymethyl-methacrylate (PMMA)	**1004917**	**38.00**
	COVER	L		○ Opal	Polycarbonate (PC)	**1004915**	**31.00**
	END CAPS[1]	L	-	● Black	Aluminium	**1004909**	**8.00**
	END CAP[1]	L	-	○ White	Aluminium	**1004910**	**8.00**
	MOUNTING CLIP[1]	L	13 cm	◑ Chrome	Aluminium	**1004911**	**14.00**

 [1] Packaging unit: 2 pieces



SYMBOLS KEY

Recommendations
Displays accessories and recommended light bulbs for the chosen products

Mix & Match
Indicates products that can be combined

Energy efficiency class
"This light is suitable for bulbs with an energy efficiency rating of ..."

Protection classes
- Protection class I / Protective conductor
- Protection class II/ Protection by double or reinforced insulation
- Protection class III/ Protection by extra-low voltage

Dimmable with:
- **C** = Trailing-edge phase dimmer
- **L** = Leading-edge phase dimmer
- **Uni** = Universal dimmer
- **1–10 V**
- **Dali** = DALI bus system
- **Switch** = Switch/button or touch control on the light
- **Touch** = Simple, stepless operation; responds to touch

IP protection rating:
Indicates the suitability of electrical equipment for different environmental conditions.

IK impact resistance rating:
The IK impact resistance rating is a measure of the resistance of housings for electrical equipment to mechanical stress, especially impact stress.

Half-diffusion angle:
Describes the beam angle in degrees. The smaller the angle, the more concentrated the light will be.

Rotation and pivoting capacity in degrees:
- Rotation range
- Pivot range
- Gimballed

Preservation of luminous flux:
Describes the amount by which the luminous flux of an LED decreases during a specified period.

Unified Glare Rating:
The lower the UGR value, the lower the psychological glare.

Pendant cable length
in cm

Cable length:
Mains plugs, connectors and supply cables (with open cable end) in cm

Through-wiring possible

Shape of the installation opening

Specification of the installation depth

Drive-over capability of the product ensured

Weight-bearing capacity of the product up to the specified value in tonnes. Measurements based on installation in concrete.

Sea-air resistant coating

Independent converter:
Control equipment also for use outside of lights

Short-circuit protected safety control equipment

Light colour temperature in Kelvin (K)

Luminous flux in lumens (lm)

Dark Sky
Indicates that the light emits almost no light into the upper half-space (ULOR < 2 %). Reduces light pollution and ensures targeted, needs-based illumination of the usable area.

Primary/Replica
Indicates lights with integrated primary/replica function. A sensor light (primary) controls downstream lights (replica) via a switched phase, enabling simple, networked lighting control without additional bus or control systems.

Connected lighting:
Indicates smart products that use the following protocols:
- Zigbee®
- DALI
- Bluetooth

Allows the installation of electrical control equipment on materials whose flammability is not known.

CCT switch:
By means of an integrated CCT switch, the light colour can be changed from 2700 K, 3000 K, 4000 K to 6500 K during installation.

Dim-to-warm:
With dimmers, the light colour can be altered from cold white to warm white.

Indicates lights with RGB+W and RGB
(Red-Green-Blue + White and Red-Green-Blue)

Indicates lights with motion sensors
(Microwaves (MR) - Technology / Infrared / Radio)

Products with integrated LEDs

Products with light socket

KS Licht – Your lighting wholesaler in Essen

Contact, customer service and information for customers
BIG WHITE 2027

Directly linked to our product range, advice and project services:

In the KS Multi Brand Business online shop, you will find the latest products, new releases and special offers, as well as information to support you with advice, quotations and project management:

- Online stock availability check
- Catalogues, browsable catalogues and product links
- Technical data, tender specifications, light distribution curves and LDT files
- Easily find and order spare parts
- View your individual terms and conditions, delivery and payment terms
- Relevant product recommendations, variants and alternative products
- Direct contact with our sales team

Customer Information

All prices are net, plus statutory VAT. The retail prices quoted are recommended retail prices. Upon publication of this catalogue, previous price lists cease to be valid.
Illustrations, colours, shapes, designs and technical specifications are for illustrative purposes only and are not binding. Subject to changes and errors.
Goods are generally dispatched ex works, carriage forward.
For orders with a net value of less than €70.00, a minimum order surcharge of €8.00 will be applied.

Ordering & Delivery

When placing orders, please always specify the item number, colour and quantity. This reduces the need for follow-up enquiries and speeds up processing.
Express and direct deliveries are available on request.
Custom-made items, components assembled to the customer's specifications and lamps are excluded from exchange.
Our General Terms and Conditions apply and are available at www.ks-germany.com/de/agb.

Kontakt

KS Licht- und Elektrotechnik GmbH
Manderscheidtstraße 8 c
45141 Essen
Germany

Verkauf & Service
Tel.: +49 (0)201-89924-0
verkauf@ks-germany.com

Online
ks-light.co.uk
www.ks-germany.com

Pflichtangaben

KS Licht- und Elektrotechnik GmbH · Sitz der Gesellschaft: Essen · Geschäftsführer: Kai Becker
Registergericht: Amtsgericht Essen · Handelsregister: HRB 12736 · Steuer-Nr.: 111/5708/2689 ·
USt-IdNr.: DE190673411

KS Licht- und Elektrotechnik GmbH
Manderscheidtstraße 8 c
45141 Essen
Germany

Tel.: +49 (0)201-89924-0

B2B-Shop: **ks-light.co.uk**
Website: www.ks-germany.com
E-Mail: verkauf@ks-germany.com

Opening hours
Monday – Thursday 08:00 – 16:30
Friday 08:00 – 15:00